



**One Source  
Lighting (1LTG)**

**A Riffle & Associates Company**



---

Riffle and Assoc

## **Submittal Package**

# **FINDLAY FLATS**

**Bid Date**

1/12/2026

**Prepared For**

Stapleton Electric





Project: FINDLAY FLATS  
To: Stapleton Electric

1/12/2026

## Bill of Materials

[Click line item to go to spec sheet.](#)

#	Qty	Type	Mfg	Description
1	0	NOTE		6 W ELDER
2	8	WM1	ENVI	<a href="#">LED-CYE-UD-3-3P30-TRI-BL-PC</a>
3	1	WM5	STUM	<a href="#">SM160116BK</a>
4	1	WM5 LAMP	ENVI	<a href="#">LED-FLM-A19-8.5W-30K-D-JA8</a>
5	2	RH1	ENVI	<a href="#">LED-EM-RC-1</a>
6	4	EX/EM	ENVI	<a href="#">LED-EM-EXT-RG-WH-CMB-RC</a>
7	11	SM8	ENVI	<a href="#">LED-BPL-2X2-3M40-5CCT</a>
8	1	SM3	ARCH	<a href="#">LDLL0510-E2S5/W</a>
9	1	EM	ENVI	<a href="#">LED-EM-DH-HO</a>
10	1	K1	EATN	<a href="#">604-SP</a>
11	1	K1 LAMP	ENVI	<a href="#">LED-FLM-A19-8.5W-30K-D-JA8</a>
12	1	SM1	ARCH	<a href="#">LDLL0510-E2S5/W</a>
13	1	V1	ENVI	<a href="#">LED-VT-ADJ-24-21W-5CCT-BN</a>
14	0	NOTE		1726 VINE
15	59	ST1	ENVI	<a href="#">LED-RST-4FT-3M40W-4CCT-SR</a>
16	11	EX/EM	ENVI	<a href="#">LED-EM-EXT-RG-WH-CMB-RC</a>
17	7	EM	ENVI	<a href="#">LED-EM-DH-HO</a>
18	177	SM1	ARCH	<a href="#">LDLL0510-E2S5/W</a>
19	11	WM1	ENVI	<a href="#">LED-CYE-UD-3-3P30-TRI-BL-PC</a>
20	10	WM5	STUM	<a href="#">SM160116BK</a>
21	10	WM5 LAMP	ENVI	<a href="#">LED-FLM-A19-8.5W-30K-D-JA8</a>
22	8	RH1	ENVI	<a href="#">LED-EM-RC-1</a>
23	4	SM8	ENVI	<a href="#">LED-BPL-2X2-3M40-5CCT</a>
24	15	SM3	ARCH	<a href="#">LDLL0510-E2S5/W</a>
25	15	V1	ENVI	<a href="#">LED-VT-ADJ-24-21W-5CCT-BN</a>
26	2	TL1	ENVI	<a href="#">TS3-8FT-SM-WH</a>
27	8	TRACK HEAD	ENVI	<a href="#">LED-ATH-10W-5CCT-30D-WH</a>
28	2	FEED	ENVI	<a href="#">TS3-SM-LIVE-WH</a>
29	3	SM13	STUM	<a href="#">SM56885FTSN</a>
30	6	SM13 LAMP	ENVI	<a href="#">LED-A19-9W-5CCT</a>
31	11	SM2	ARCH	<a href="#">LDLL0510-E2S5/W</a>



Project: FINDLAY FLATS  
To: Stapleton Electric

1/12/2026

## Bill of Materials

[Click line item to go to spec sheet.](#)

#	Qty	Type	Mfg	Description
32	6	EMW1	MULE	MAKO-LED-ACEM-DB-IH
33	0	NOTE		1732-1734 VINE ST
34	9	F2	CARR	CFR525J1-N10-WP-1-FM
35	5	EM	ENVI	LED-EM-DH-HO
36	4	EX/EM	ENVI	LED-EM-EXT-RG-WH-CMB-RC
37	4	RH1	ENVI	LED-EM-RC-1
38	51	SM1	ARCH	LDLL0510-E2S5/W
39	6	SM2	ARCH	LDLL0510-E2S5/W
40	13	SM3	ARCH	LDLL0510-E2S5/W
41	7	SM8	ENVI	LED-BPL-2X2-3M40-5CCT
42	1	SM13	STUM	SM56885FTSN
43	2	SM13 LAMP	ENVI	LED-A19-9W-5CCT
44	6	TL1	ENVI	TS3-8FT-SM-WH
45	24	TRACK HEAD	ENVI	LED-ATH-10W-5CCT-30D-WH
46	6	FEED	ENVI	TS3-SM-LIVE-WH
47	5	WM1	ENVI	LED-CYE-UD-3-3P30-TRI-BL-PC
48	6	V1	ENVI	LED-VT-ADJ-24-21W-5CCT-BN
49	4	ST1	ENVI	LED-RST-4FT-3M40W-4CCT-SR
50	2	EM	ENVI	LED-EM-DH-HO
51	1	SM1	ARCH	LDLL0510-E2S5/W
52	10	SM3	ARCH	LDLL0510-E2S5/W
53	1	V1	ENVI	LED-VT-ADJ-24-21W-5CCT-BN
54	0	NOTE		1801-1805 VINE ST
55	8	ST1	ENVI	LED-RST-4FT-3M40W-4CCT-SR
56	14	EX/EM	ENVI	LED-EM-EXT-RG-WH-CMB-RC
57	10	EM	ENVI	LED-EM-DH-HO
58	4	WM1	ENVI	LED-CYE-UD-3-3P30-TRI-BL-PC
59	5	WM5	STUM	SM160116BK
60	5	WM5 LAMP	ENVI	LED-FLM-A19-8.5W-30K-D-JA8
61	4	RH1	ENVI	LED-EM-RC-1
62	14	SM8	ENVI	LED-BPL-2X2-3M40-5CCT



Project: FINDLAY FLATS  
To: Stapleton Electric

1/12/2026

## Bill of Materials

[Click line item to go to spec sheet.](#)

#	Qty	Type	Mfg	Description
63	22	SM3	ARCH	<a href="#">LDLL0510-E2S5/W</a>
64	100	SM1	ARCH	<a href="#">LDLL0510-E2S5/W</a>
65	8	V1	ENVI	<a href="#">LED-VT-ADJ-24-21W-5CCT-BN</a>
66	4	TL1	ENVI	<a href="#">TS3-8FT-SM-WH</a>
67	16	TRACK HEAD	ENVI	<a href="#">LED-ATH-10W-5CCT-30D-WH</a>
68	4	FEED	ENVI	<a href="#">TS3-SM-LIVE-WH</a>
69	2	SM13	STUM	<a href="#">SM56885FTSN</a>
70	4	SM13 LAMP	ENVI	<a href="#">LED-A19-9W-5CCT</a>
71	4	SM2	ARCH	<a href="#">LDLL0510-E2S5/W</a>
72	0	NOTE		1802 REPUBLIC
73	6	F2	CARR	<a href="#">CFR525J1-N10-WP-1-FM</a>
74	5	EM	ENVI	<a href="#">LED-EM-DH-HO</a>
75	2	EX/EM	ENVI	<a href="#">LED-EM-EXT-RG-WH-CMB-RC</a>
76	3	EX/EM	ENVI	<a href="#">LED-EM-EXT-RG-WH-CMB-RC</a>
77	2	RH1	ENVI	<a href="#">LED-EM-RC-1</a>
78	37	SM1	ARCH	<a href="#">LDLL0510-E2S5/W</a>
79	4	SM2	ARCH	<a href="#">LDLL0510-E2S5/W</a>
80	9	SM3	ARCH	<a href="#">LDLL0510-E2S5/W</a>
81	6	SM8	ENVI	<a href="#">LED-BPL-2X2-3M40-5CCT</a>
82	1	SM13	STUM	<a href="#">SM56885FTSN</a>
83	2	SM13 LAMP	ENVI	<a href="#">LED-A19-9W-5CCT</a>
84	4	TL1	ENVI	<a href="#">TS3-8FT-SM-WH</a>
85	16	TRACK HEAD	ENVI	<a href="#">LED-ATH-10W-5CCT-30D-WH</a>
86	4	FEED	ENVI	<a href="#">TS3-SM-LIVE-WH</a>
87	3	WM1	ENVI	<a href="#">LED-CYE-UD-3-3P30-TRI-BL-PC</a>
88	4	WM5	STUM	<a href="#">SM160116BK</a>
89	4	WM5 LAMP	ENVI	<a href="#">LED-FLM-A19-8.5W-30K-D-JA8</a>
90	5	V1	ENVI	<a href="#">LED-VT-ADJ-24-21W-5CCT-BN</a>
91	4	ST1	ENVI	<a href="#">LED-RST-4FT-3M40W-4CCT-SR</a>
92	0	NOTE		1804 REPUBLIC
93	7	F2	CARR	<a href="#">CFR525J1-N10-WP-1-FM</a>



Project: FINDLAY FLATS  
To: Stapleton Electric

1/12/2026

## Bill of Materials

[Click line item to go to spec sheet.](#)

#	Qty	Type	Mfg	Description
94	6	EM	ENVI	LED-EM-DH-HO
95	1	EX/EM	ENVI	LED-EM-EXT-RG-WH-CMB-RC
96	1	RH1	ENVI	LED-EM-RC-1
97	73	SM1	ARCH	LDLL0510-E2S5/W
98	7	SM2	ARCH	LDLL0510-E2S5/W
99	8	SM3	ARCH	LDLL0510-E2S5/W
100	1	SM13	STUM	SM56885FTSN
101	2	SM13 LAMP	ENVI	LED-A19-9W-5CCT
102	6	WM1	ENVI	LED-CYE-UD-3-3P30-TRI-BL-PC
103	7	V1	ENVI	LED-VT-ADJ-24-21W-5CCT-BN
104	4	ST1	ENVI	LED-RST-4FT-3M40W-4CCT-SR
105	0	NOTE		1806 REPUBLIC
106	8	F2	CARR	CFR525J1-N10-WP-1-FM
107	4	EM	ENVI	LED-EM-DH-HO
108	3	EX/EM	ENVI	LED-EM-EXT-RG-WH-CMB-RC
109	1	RH1	ENVI	LED-EM-RC-1
110	56	SM1	ARCH	LDLL0510-E2S5/W
111	4	SM2	ARCH	LDLL0510-E2S5/W
112	9	SM3	ARCH	LDLL0510-E2S5/W
113	1	SM13	STUM	SM56885FTSN
114	2	SM13 LAMP	ENVI	LED-A19-9W-5CCT
115	4	WM1	ENVI	LED-CYE-UD-3-3P30-TRI-BL-PC
116	4	V1	ENVI	LED-VT-ADJ-24-21W-5CCT-BN
117	3	ST1	ENVI	LED-RST-4FT-3M40W-4CCT-SR
118	0	NOTE		1807 VINE
119	5	ST1	ENVI	LED-RST-4FT-3M40W-4CCT-SR
120	3	EX/EM	ENVI	LED-EM-EXT-RG-WH-CMB-RC
121	6	EM	ENVI	LED-EM-DH-HO
122	2	WM1	ENVI	LED-CYE-UD-3-3P30-TRI-BL-PC
123	2	WM5	STUM	SM160116BK
124	2	WM5 LAMP	ENVI	LED-FLM-A19-8.5W-30K-D-JA8



Project: FINDLAY FLATS  
To: Stapleton Electric

1/12/2026

## Bill of Materials

[Click line item to go to spec sheet.](#)

#	Qty	Type	Mfg	Description
125	3	RH1	ENVI	<a href="#">LED-EM-RC-1</a>
126	8	SM8	ENVI	<a href="#">LED-BPL-2X2-3M40-5CCT</a>
127	7	SM3	ARCH	<a href="#">LDLL0510-E2S5/W</a>
128	4	V1	ENVI	<a href="#">LED-VT-ADJ-24-21W-5CCT-BN</a>
129	1	SM13	STUM	<a href="#">SM56885FTSN</a>
130	2	SM13 LAMP	ENVI	<a href="#">LED-A19-9W-5CCT</a>
131	3	SM2	ARCH	<a href="#">LDLL0510-E2S5/W</a>
132	37	SM1	ARCH	<a href="#">LDLL0510-E2S5/W</a>
133	0	NOTE		1808-1810 REPUBLIC
134	3	ST1	ENVI	<a href="#">LED-RST-4FT-3M40W-4CCT-SR</a>
135	7	EM	ENVI	<a href="#">LED-EM-DH-HO</a>
136	2	EX/EM	ENVI	<a href="#">LED-EM-EXT-RG-WH-CMB-RC</a>
137	1	WM1	ENVI	<a href="#">LED-CYE-UD-3-3P30-TRI-BL-PC</a>
138	1	RH1	ENVI	<a href="#">LED-EM-RC-1</a>
139	20	SM3	ARCH	<a href="#">LDLL0510-E2S5/W</a>
140	5	V1	ENVI	<a href="#">LED-VT-ADJ-24-21W-5CCT-BN</a>
141	5	SM2	ARCH	<a href="#">LDLL0510-E2S5/W</a>
142	90	SM1	ARCH	<a href="#">LDLL0510-E2S5/W</a>
143	0	NOTE		1809 VINE ST
144	4	ST1	ENVI	<a href="#">LED-RST-4FT-3M40W-4CCT-SR</a>
145	6	EM	ENVI	<a href="#">LED-EM-DH-HO</a>
146	2	EX/EM	ENVI	<a href="#">LED-EM-EXT-RG-WH-CMB-RC</a>
147	3	WM1	ENVI	<a href="#">LED-CYE-UD-3-3P30-TRI-BL-PC</a>
148	2	WM5	STUM	<a href="#">SM160116BK</a>
149	2	WM5 LAMP	ENVI	<a href="#">LED-FLM-A19-8.5W-30K-D-JA8</a>
150	2	RH1	ENVI	<a href="#">LED-EM-RC-1</a>
151	9	SM8	ENVI	<a href="#">LED-BPL-2X2-3M40-5CCT</a>
152	7	SM3	ARCH	<a href="#">LDLL0510-E2S5/W</a>
153	4	V1	ENVI	<a href="#">LED-VT-ADJ-24-21W-5CCT-BN</a>
154	2	TL1	ENVI	<a href="#">TS3-8FT-SM-WH</a>
155	8	TRACK HEAD	ENVI	<a href="#">LED-ATH-10W-5CCT-30D-WH</a>




Project: FINDLAY FLATS  
To: Stapleton Electric

1/12/2026

# Bill of Materials

Click line item to go to spec sheet.

#	Qty	Type	Mfg	Description
156	2	FEED	ENVI	TS3-SM-LIVE-WH
157	1	SM13	STUM	SM56885FTSN
158	2	SM13 LAMP	ENVI	LED-A19-9W-5CCT
159	3	SM2	ARCH	LDLL0510-E2S5/W
160	30	SM1	ARCH	LDLL0510-E2S5/W

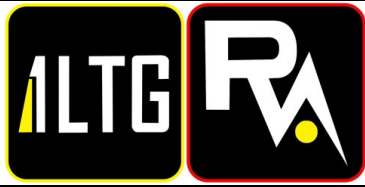

Date: 1/12/2026

Project:  
FINDLAY FLATSDescription:  
LED-CYE-UD-3-3P30-TRI-BL-PCLine Item#: 2  
[Go to Bill of Materials](#)

Type: WM1

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COMProject: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_

Area Lights



## M-Line: 3" Edge-Lit Cylinder Up/Down Light

3-CCT w/ Photocell



WATT	LUMENS
10	1,200
20	2,400
30	3,600

**Detail Specification:**

- Finish: Bronze, Black, White
- IP Rating: Wet Location IP65
- Beam Angle: 60°
- CCT: 30/40/50K Selectable
- Wattage: 30/20/10w
- Lumens: 3,600
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 122° F
- BUG: B2-U2-G2
- Lens: Clear glass with optics
- Average life (L70) of 50,000 hours

**Applications:**

- Dock and Loading
- Walkways & Pathways
- Parking Lots
- Hospitality, Multi-Family
- Outdoor Corridors
- General Outdoor Lighting
- Residential, Commercial and Industrial

**Product Information:**

- Sturdy die-cast aluminum housing finished with corrosion free powder coat
- Photocell included on each fixture. Easy disconnect.
- 1.5' STJW 18.3 AWG cable whip included
- Illuminates up and down and edge
- Select-n-Switch Technology: 3-CCT Selectable + 3-Power Selectable
- Instant-On to full brightness

**Driver Options:**

- UNV: 120-277V 0-10V Dimmable
- Built in 6Kv Surge Protector
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz

**Mounting & Installation:**

- Mounts to 3 or 4" J-box
- Covers a standard 4" recessed j-box

**Certifications:**

- UL Listed for USA and CA
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

**Series****LED-CYE-UD-3-3P30-TRI -**  
3" Up/Down Cylinder • 30/20/10W**Finish****BZ**  
Bronze  
**WH**  
White  
**BL**  
Black**Photocell****PC**  
Photocell  
is included.  
Easy quick  
disconnect.  
(PC-3/4-3PIN-LV)

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 10.23



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-CYE-UD-3-3P30-TRI-BL-PC

Line Item#: 2  
[Go to Bill of Materials](#)

Type: WM1

Powered by 4submit.com


**EnVisionLED**<sup>TM</sup>  
WWW.ENVISIONLEDLIGHTING.COM

## M-Line: 3" Edge-Lit Cylinder Up/Down Light 3-CCT w/ Photocell

### FEATURES




### DIMENSIONS

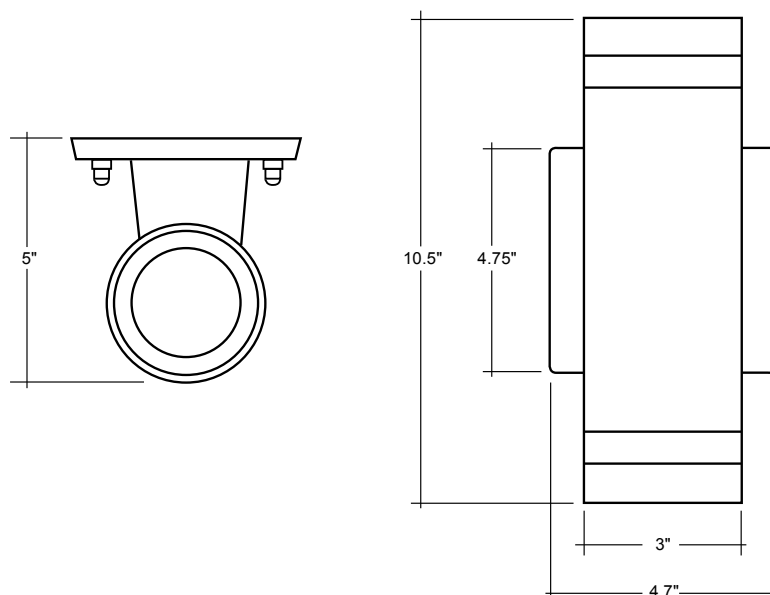

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)



	<b>Date:</b> 1/12/2026	<b>Description:</b> SM160116BK	<b>Line Item#:</b> 3 <a href="#">Go to Bill of Materials</a>
	<b>Project:</b> FINDLAY FLATS		<b>Type:</b> WM5
			Powered by 4submital.com


Signlite | SM160116BK
 

Job Name:
 Job Type:
 Quantity:
 Comments:



PRODUCT DESCRIPTION

This classic design was originally used to illuminate signs but now is used as a nostalgic wall washer in residential and commercial applications. The polycarbonate shade is supported by an aluminum arm for maximum durability at a very affordable price.



\*height from center of outlet to the top of the fixture

MEASUREMENTS

DIMENSION	: 7.5" W x 13.75" H x 20.5" Ext
BACK PLATE	: 5" W x 5" H x 2.5" HCO
HANGING WEIGHT	: 1.17 lb
<b>LAMPING</b>	
INPUT VOLTAGE	: 120V
BULB	: 60W Incandescent E26 Medium , 60W Total
BULB INCLUDED	: (Not Included)
DIMMABLE	: Yes
LIGHTING_DIRECTION	: Down

FINISHES OPTION

☒ Black (BK)

MATERIAL

Polycarbonate, Aluminum

RATINGS

cETLus  
Wet Location



ADDITIONAL


INSTALL UP/DOWN: Down  
 OPERATING TEMPERATURE:  
 -20°C (-4°F), 40°C (104°F)

Always consult a qualified electrician before installing any lighting product.

STUDIO•M

Modifications or Customizations: Please email [contract@studiomlighting.com](mailto:contract@studiomlighting.com)  
 Sample Request: Please email [order@studiomlighting.com](mailto:order@studiomlighting.com) with subject line  
 "Sample Order\_ [Project Name] / [Specifier/Designer]"  
 All samples are subject to Studio M approval and must show proof of project and/or explanation.

Job Name:	Job Type:
Quantity:	Comments:

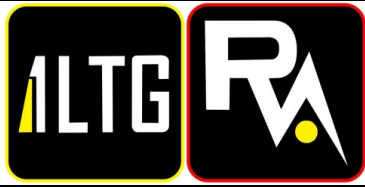

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-FLM-A19-8.5W-30K-D-JA8

Line Item#: 4  
[Go to Bill of Materials](#)


Type: WM5 LAMP

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## A-19 Bulb Filament Series

LED Bulbs

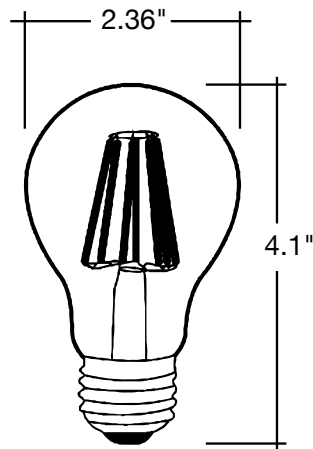

### Detail Specifications

- IP Rating: Damp Location
- Beam Angle: Omni-Directional 360°
- Chip: Filament, R9- 78, CRI >90
- Operating Temperature: -4° - 114° F
- Average life (L70) of 25,000 hours

### Applications:

- Decorative Lighting
- Interior Lighting
- Table & Floor Lamps
- Showcases
- Residential, Multi-Family, Commercial

### Product Information:

- Suitable for use in existing fixtures
- Instant-On to full brightness

### Driver Options:

- 120V
- Triac Dimmable
- PF >0.9, 50/60Hz

### Mounting & Installation:

- E26 Socket
- Direct A Lamp Replacement

### Certifications:

- UL Listed for USA and CA
- Energy Star
- Title 20 and JA8-2022 Approved (8.5W Model Only)
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

### Dimmer List:

Leviton	6674
Lutron	LGCL-153P
Lutron	DVCL-153P
Lutron	CTCL-153P
Lutron	MAELV-300

### Series

**LED-FLM-A19-8.5W-30K-D-JA8**

550 Lumens 60W Equivalent

**LED-FLM-A19-10W-27K**


1,000 Lumens 100W Equivalent

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 10.23

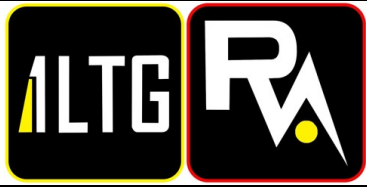

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-RC-1

Line Item#: 5  
[Go to Bill of Materials](#)

Type: RH1

Powered by 4submittal.com



Project: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_



## Single/Double Remote Head

### Product Information:

- Injection-Molded Thermoplastic ABS Housing
- 320 Lumens
- UL-940V-0 Flame Rating
- Wall and Ceiling Mounting
- Input Voltage: 3.6-24 VDC
- Super Bright SMD LED 2.4W
- IP Class: IP65
- Insulation: Class II
- Operating Temperature: 0°F ~ 104° F
- Remote Capable
- Compatible with but Not Limited to  
LED-EM-EXT-G-WH-CMB-RC  
or LED-EM-EXT-R-WH-CMB-R
- 5 Year Limited Warranty



#### 1 Product

LED-EM-RC Remote Head


#### 2 Head


Single 1  
Double 2

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)



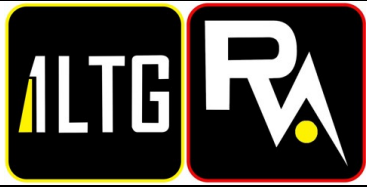

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-RC-1

Line Item#: 5  
[Go to Bill of Materials](#)

Type: RH1

Powered by 4submittal.com




## Single/Double Remote Head

### FEATURES



### FEATURES

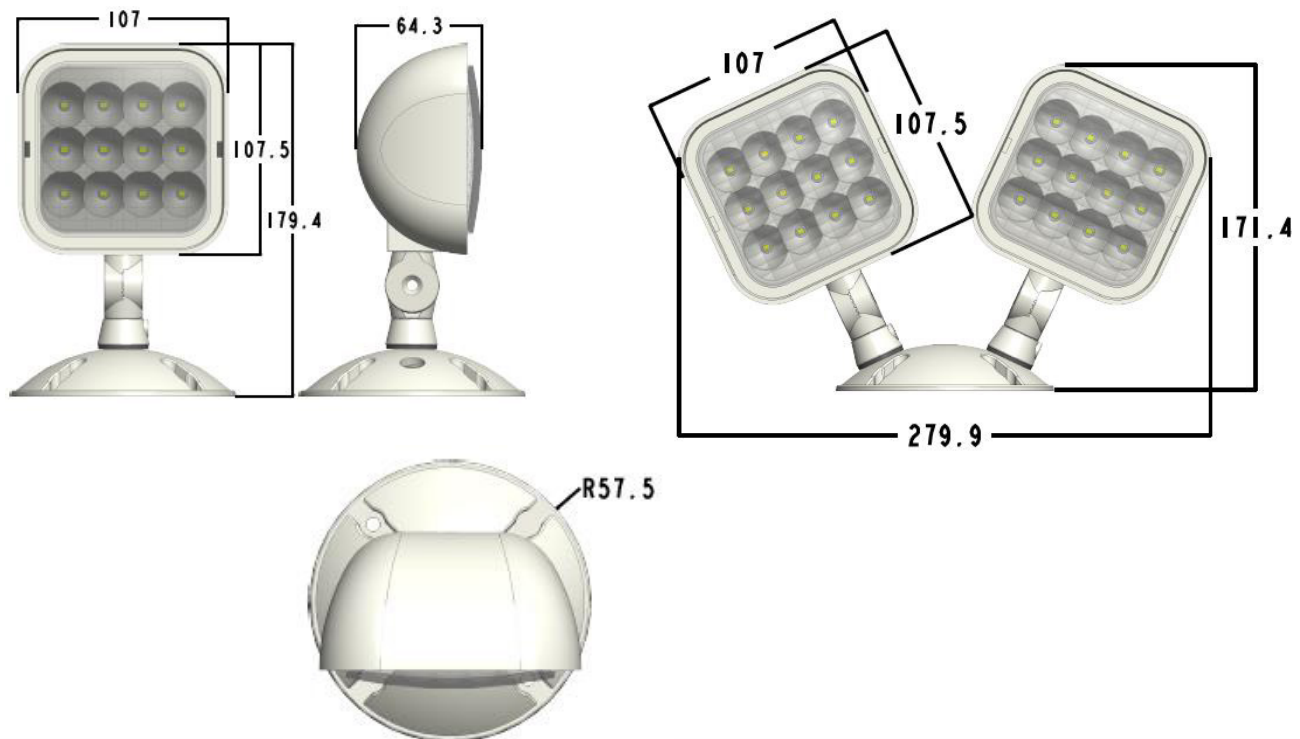


*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)



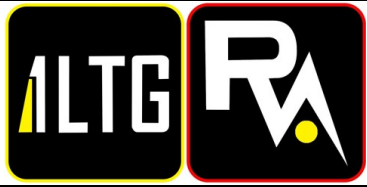

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-EXT-RG-WH-CMB-RC

Line Item#: 6  
[Go to Bill of Materials](#)

Type: EX/EM

Powered by 4submittal.com

**EnVisionLED**<sup>TM</sup>  
[WWW.ENVISIONLEDLIGHTING.COM](http://WWW.ENVISIONLEDLIGHTING.COM)

## Emergency Exit Sign With Bug Eyes



### Emergency Exit Signs



Project: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_

#### Detail Specifications:

- Finish: White Finish
- IP Rating: IP20, Dry Location
- Wattage: 3.5W
- Lumens: 140
- Operating Temperature: 32°F to 104°F
- Lens: Red or Green
- Remoted Capable
- Compatible with: LED-EM-RC-1, LED-EM-RC-2
- Average life (L70) of 50,000 hours

#### Applications:

- Exit Doors
- Corridor Intersections
- Exit Stairways
- Exit Ramps

#### Product Information:

- Built-in test switch and charge indicator
- Injection-molded thermoplastic housing, PC cover
- Backup Time: >90 minutes
- Recharge time: 24 hours
- Single Face
- 6" height letters with 3/4" stroke, viewable from 100ft away

#### Driver Options:

- Dual Voltage 120/277V
- PF >0.9, 50/60Hz

#### Mounting & Installations:

- Wall and ceiling mounted
- Universal J-box mounting pattern

#### Certifications:

- UL Listed for USA and CA (UL94V-0 Flame Rating)
- Meets UL924, NDPA 101
- Approved for CA T24
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

#### REMOTE HEAD OPTIONS

LED-EM-RC-1

LED-EM-RC-2

Series

**LED-EM-EXT-RG-WH-CMB-RC**

Red/Green Color Selectable


*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 08.25



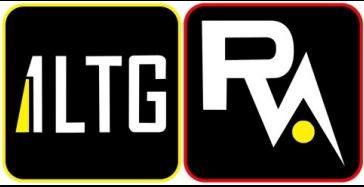

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-EXT-RG-WH-CMB-RC

Line Item#: 6  
[Go to Bill of Materials](#)


Type: EX/EM

Powered by 4submit.com


**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## Emergency Exit Sign With Bug Eyes

### FEATURES

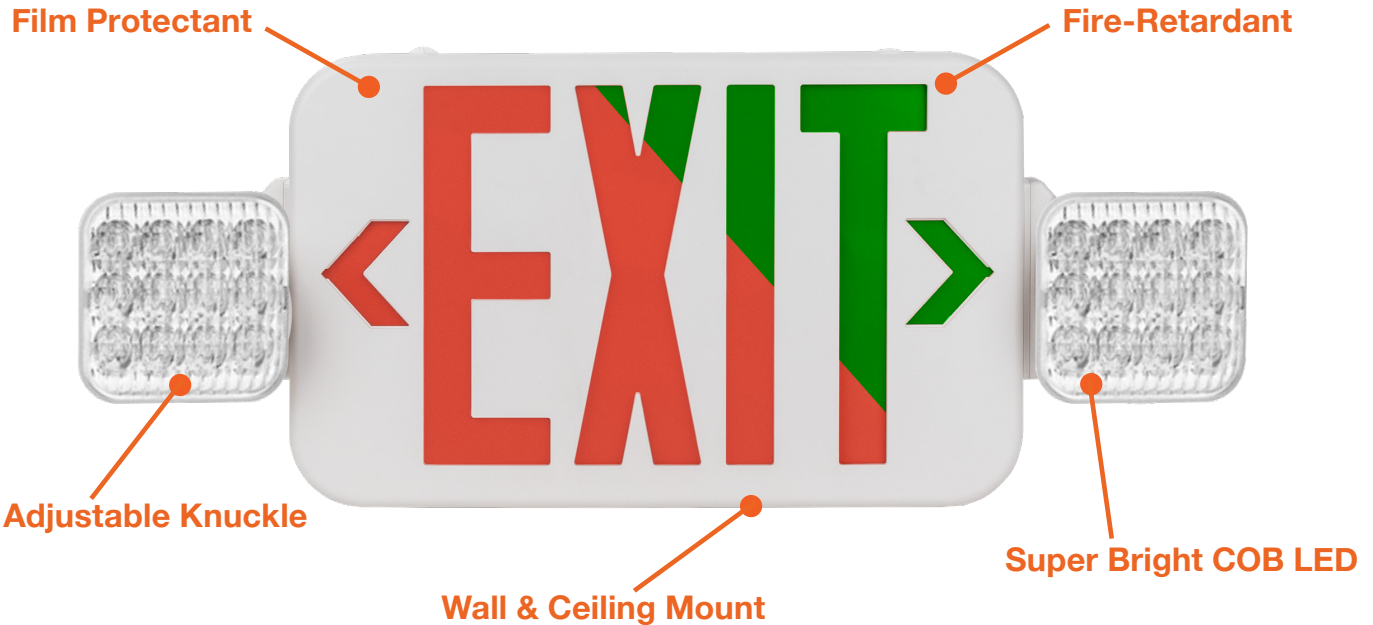

### DIMENSIONS

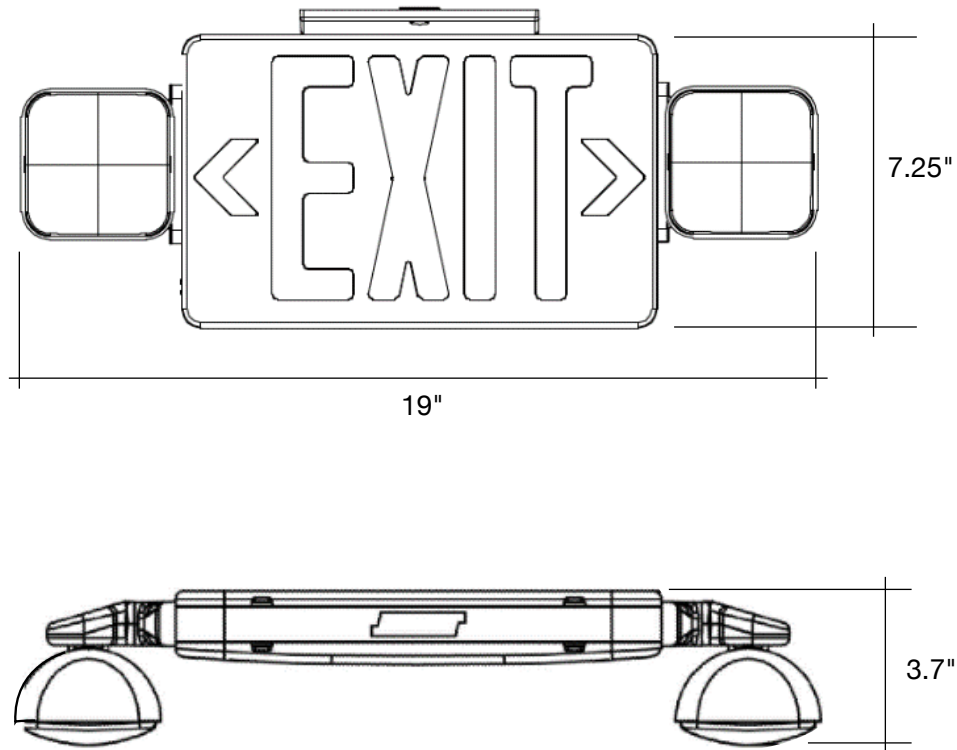

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)



Date: 1/12/2026

Project:  
FINDLAY FLATSDescription:  
LED-BPL-2X2-3M40-5CCTLine Item#: 7  
[Go to Bill of Materials](#)

Type: SM8

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## LED Panels: BackLit Line

### 5-CCT & 3-Power Selectable

LED Panels

**Detail Specifications:**

- Finish: White, Custom finishes available
- IP Rating: Damp Location (IP44)
- 5CCT: 30/35/40/50/65K
- Beam Angle: 110°
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 114° F
- Lens: PS (polystyrene) frosted, non-yellowing, & shatter resistant
- Average life (L70) of 50,000 hours
- IC Rated

**Applications:**

- General Indoor Lighting
- Utility & Storage
- Garage Structures
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality
- Commercial and Industrial

**Product Information:**

- Metal housing finished with corrosion free power coat
- Even light distribution
- Lightweight for easier installation
- Select-n-Switch Technology: 5-CCT + 3-Power Selectable
- Control Options:
  - Standard Sensors
  - SILVAIR Bluetooth Mesh
  - ENVISIONLS Bluetooth
  - [Click Here](#) for More Information

**Driver Options:**


- UNV: 120-277V 0-10V Dimmable (Dim to Off)
- Optional 347-480V step down transformer available
- Standard EMB used:
  - 40W: 8W EMB ([LED-EMB-8W-HV-0-10V-2P](#))
  - 50W: 15W EMB ([LED-EMB-15W-HV-0-10V-2P](#))
- Higher wattage emb (up to 25W) available by request. Pricing will vary.
- THD: <15% (+/-5% tolerance), PF >0.9, 50/60Hz
- Isolated Driver
- Flicker Free

**Mounting & Installations:**

- Lay-in ceilings for 5/8" and 3/8" ceiling widths
- Built-in earthquake clips
- Optional 9' suspension kit available
- Optional surface mount, drywall kit available
- Use surface mount and suspension kit for an aesthetically pleasing design

**Certifications:**

- ETL Listed for USA and CA
- DLC Listed/ DLC Premium Listed (HL Versions)
  - View DLC ID Chart below
- NSF Rated
- Approved for CA T24
- 5 Year Limited Warranty

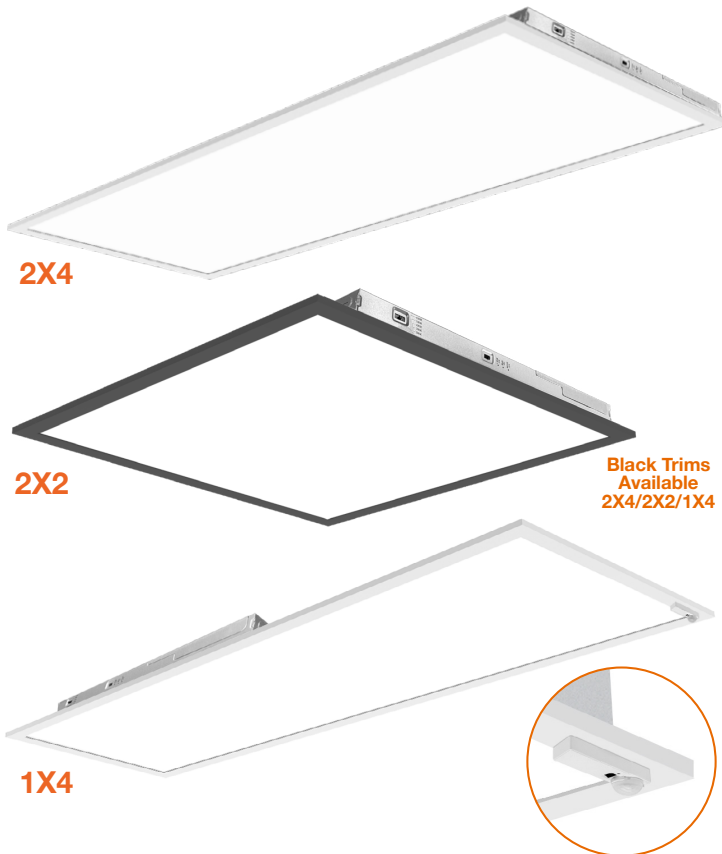Black Trims  
Available  
2X4/2X2/1X4Shown with  
Sensor Option

Regular Versions		HL Versions	
WATT	LUMENS	WATT	LUMENS
20	2,200	30	3,750
30	3,300	40	5,000
40	4,400	45	5,625
50	5,500	50	6,250
		55	6,875
		65	8,125

Series	Sensor	Emergency	Driver <sup>1</sup>	Whip
LED-BPL-2X2-3M40-5CCT	(blank)	(blank)	(blank)	(blank)
20/30/40W	No Sensor	No	120-277V	No Whip
LED-BPL-2X2-3M50-5CCT-HL	SR	Emergency	HV	-6FLX
30/40/50W	Sensor Ready	Emergency	347-480V	6' Flex
LED-BPL-2X4-3M50-5CCT	(See sensor options)	Backup	Stepdown	
30/40/50W				
LED-BPL-2X4-3M65-5CCT-HL				
45/55/65W				
LED-BPL-1X4-3M40-5CCT				
20/30/40W				

1. HV: High voltage  
is made to order.**Optional Accessories (Order Separately)**


Sensors	Suspension Kits	Surface <sup>1</sup> Mount Kits	Drywall Kits	Color Trims
S-AUD-PIR-1	SK-10FT-Y-LC-CB	2X2-SM-3"	LED-PNL-2X2-FLNG	BPL-2X2-TRIM-BL
PIR Bi-Level	10' Suspension Kit	3" Height	LED-PNL-2X4-FLNG	2x2 Black Trim
Motion + Daylight	SK-20FT-Y-LC-CB	2X4-SM-3"	LED-PNL-1X4-FLNG	BPL-2X4-TRIM-BL
Sensor Remote	20' Suspension Kit	3" Height		2x4 Black Trim
Required:	CK-6FT-V	1X4-SM-3"		BPL-1X4-TRIM-BL
(S-LINE-R)				1x4 Black Trim
S-AUD-PIR-BT	6' Chain Hanging Kit	3" Height		
PIR ENVISIONLS				
Bluetooth Control				
S-AUD-PIR-SL				
PIR SILVAIR				
Bluetooth Mesh				

1. Custom height options  
available. Contact us.

Specs and model numbers are subject to change with or without notice. Customization of product is available.

**EnVision LED Lighting, Inc.**6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 12.24

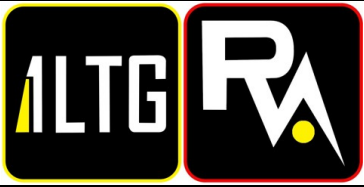

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-BPL-2X2-3M40-5CCT

Line Item#: 7  
[Go to Bill of Materials](#)

Type: SM8


Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM


## LED Panels: BackLit Line

### 5-CCT & 3-Power Selectable

#### FEATURES

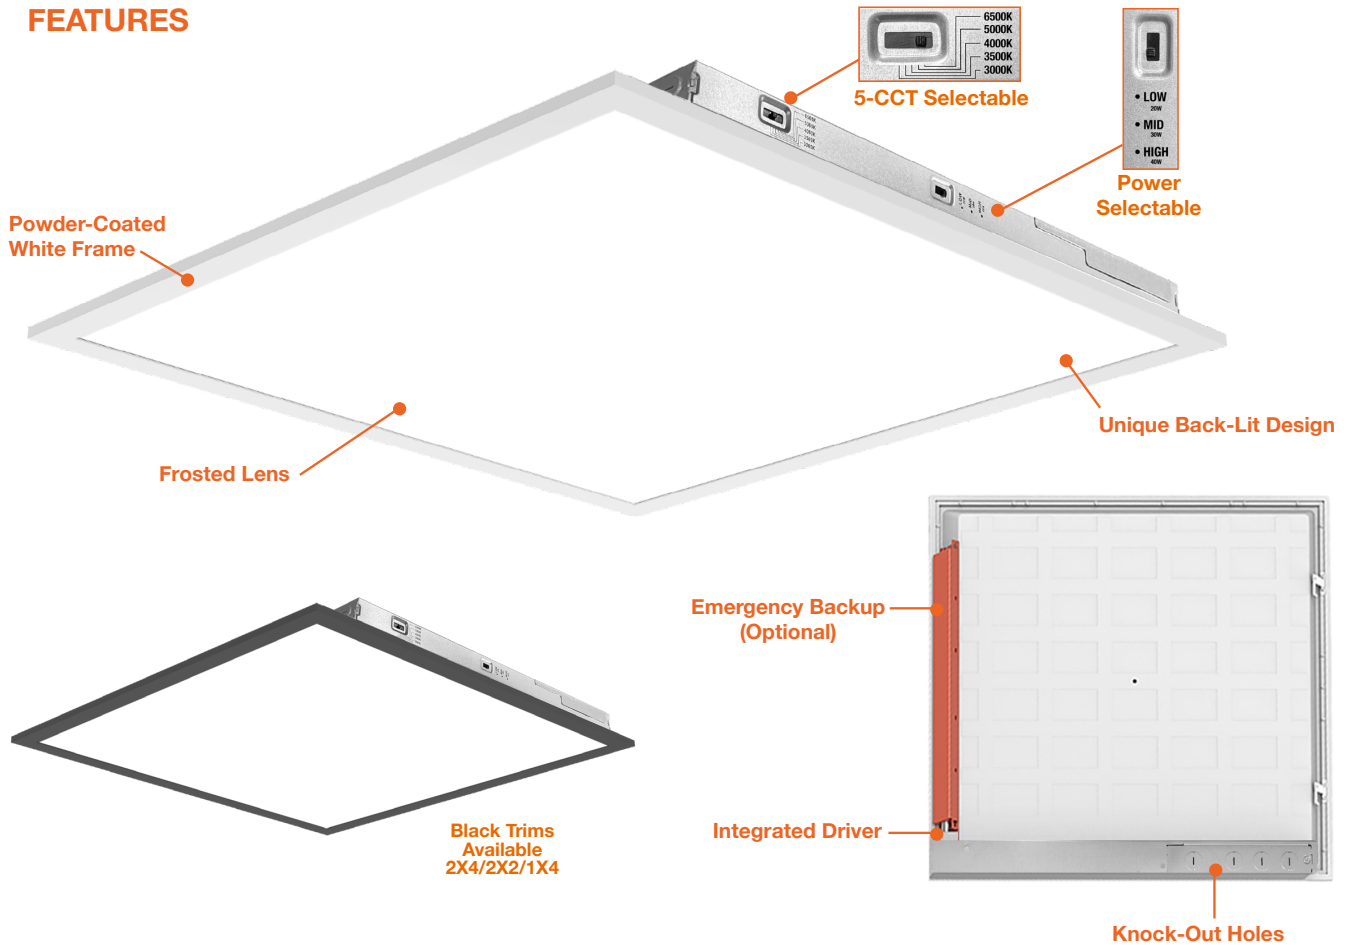

#### DIMENSIONS

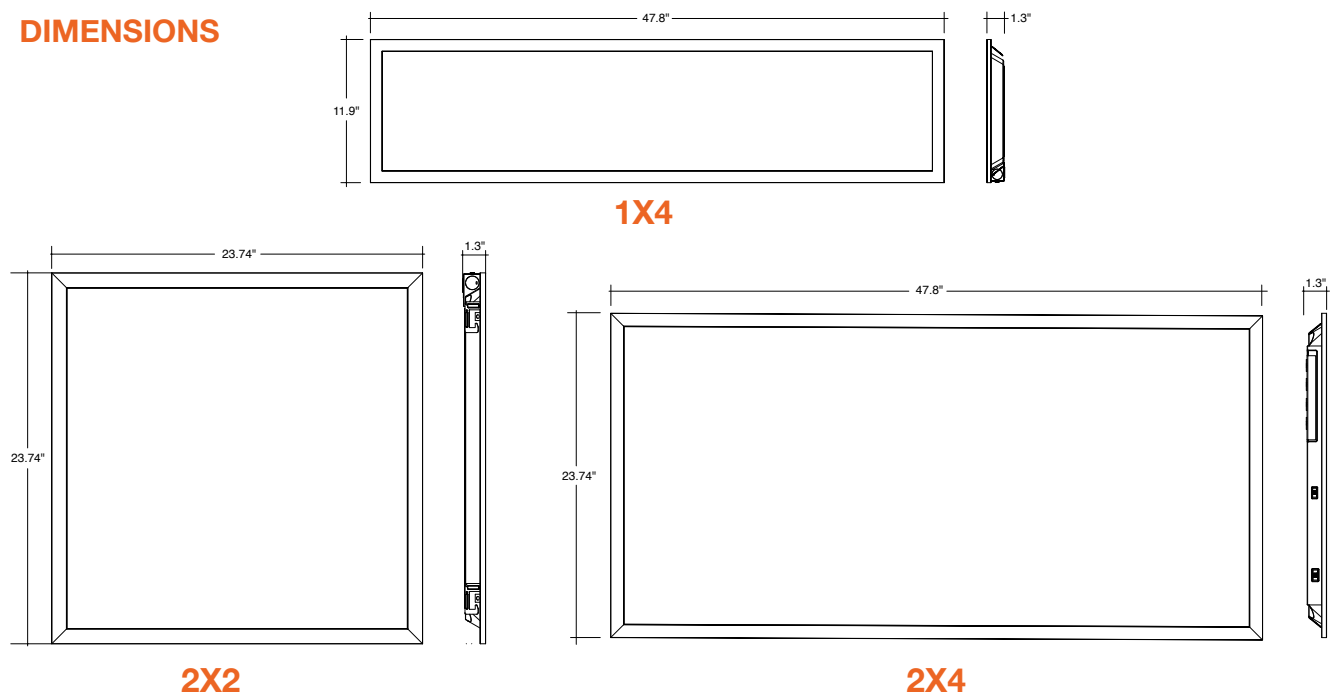





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-BPL-2X2-3M40-5CCT

Line Item#: 7  
[Go to Bill of Materials](#)

Type: SM8

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## LED Panels: BackLit Line 5-CCT & 3-Power Selectable

### ACCESSORIES




SK-10FT-Y-LC-CB  
SK-20FT-Y-LC-CB



CK-6FT-V




S-AUD-PIR-1  
S-AUD-PIR-BT  
S-AUD-PIR-SL

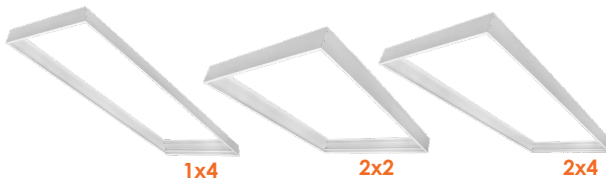

1x4

2x2

2x4

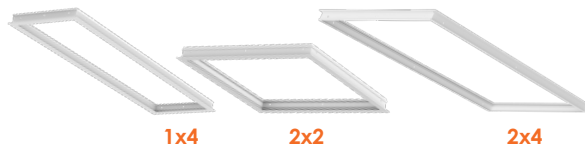

1x4

2x2

2x4



2x2



1x4



2x4

Model	Voltage	Watts	Lumens	Color	CRI
LED-BPL-2X2-3M40-5CCT	120/277V	20/30/40w	2600/3900/4400	30/35/40/50/65k	>80
LED-BPL-2X2-3M50-5CCT-HL	120/277V	30/40/50w	3900/4400/5500	30/35/40/50/65k	>80
LED-BPL-2X4-3M50-5CCT	120/277V	30/40/50w	3900/4400/5500	30/35/40/50/65k	>80
LED-BPL-2X4-3M65-5CCT-HL	120/277V	45/55/65w	5625/6875/8125	30/35/40/50/65k	>80
LED-BPL-1X4-3M40-5CCT	120/277V	20/30/40w	2600/3900/4400	30/35/40/50/65k	>80

### SUSPENSION KITS

Accessory	Description
SK-10FT-Y-LC-CB	10' Suspension Kit
SK-20FT-Y-LC-CB	20' Suspension Kit
CK-6FT-V	6' Chain Hanging Kit
LED-PNL-2X4-SK	3.5' Suspension Kit, works for all sizes

### SENSORS

Accessory Model	Description
S-AUD-PIR-1	PIR Bi-Level Motion + Daylight Sensor Remote Required: (S-LINE-R)
S-AUD-PIR-BT	PIR ENVISIONLS Bluetooth Control
S-AUD-PIR-SL	PIR SILVAIR Bluetooth Mesh

### SURFACE MOUNT KITS

Accessory	Description
2X2-SM-3"	2X2 Surface Mount Kit 3" Height for all Panels and Troffers
2X4-SM-3"	2X4 Surface Mount Kit 3" Height for all Panels and Troffers
1x4-SM-3"	1X4 Surface Mount Kit 3" Height for all Panels and Troffers

### DRYWALL KITS

Accessory	Description
LED-PNL-2X2-FLNG	Flange (Drywall) Kit for Panels for all 2X2 Fixtures
LED-PNL-2X4-FLNG	Flange (Drywall) Kit for Panels for all 2X4 Fixtures
LED-PNL-1X4-FLNG	Flange (Drywall) Kit for Panels for all 1X4 Fixtures

### TRIMS


Accessory	Description
BPL-2X2-TRIM-BL	2x2 LED Panel: Backlit-Line Black Trim
BPL-1X4-TRIM-BL	1x4 LED Panel: Backlit-Line Black Trim
BPL-2X4-TRIM-BL	2x4 LED Panel: Backlit-Line Black Trim

Luminaires for Ambient Lighting of - DLC Product ID:

LED-BPL-2x2-3M40-5CCT	S-IMBE52 (Standard)
LED-BPL-2x4-3M50-5CC	S-U0267J (Standard)
LED-BPL-1x4-3M40-5CCT	S-DR8V2E (Standard)
LED-BPL-2x2-3M50-5CCT-HL	S-V26054 (Standard)
LED-BPL-2x4-3M65-5CCT-HL	S-WNV8KG (Premium)

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

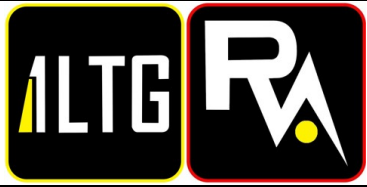

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-BPL-2X2-3M40-5CCT









Line Item#: 7  
[Go to Bill of Materials](#)

Type: SM8


Powered by 4submittal.com

## EnVisionLED™ Control Options

EnVision LED offers 3 control systems compatible with our LED Fixtures for projects of all sizes and budgets.

	Basic Controls	EnVisionLS 	EnVisionLED™ x SILVAIR 
<b>Description</b>	Standard Plug In Sensors	Basic Bluetooth Wireless Control	Advanced Bluetooth Wireless Control
<b>Recommended Quantity</b> (but not limited to)	N/A	>40-50 Nodes	>50 Nodes
<b>Maximum Zone Quantity</b>	N/A	100	3,000
<b>Commissioning Tool</b>	Remote Only	  ENVISIONLS App 	  SILVAIR App 
<b>Commissioning Process</b>	Individually Set via Remote	Wireless Must be done on site	Wireless- Initial linking must be done on site. Commissioning can be done via desktop remotely.
<b>Floor Plan Upload</b>	N/A	N/A	Yes Add a floor plan and mark luminaires & zones via desktop
<b>Gateway</b>	N/A	N/A	Required only for energy monitoring, advanced scheduling, automated demand response.
<b>Individual Luminaire Control</b>	Yes	Yes	Yes
<b>Luminaire Grouping Zoning</b>	N/A	Yes	Yes
<b>High End Power Low End Power</b>	Yes but limited (View Remote)	Yes	Yes
<b>Cost</b>	\$	\$\$	\$\$\$
<b>DLC NLC Listed</b>	N/A	Yes	Yes
<b>Energy Monitoring &amp; Data Reporting</b>	N/A	N/A	Monitor energy usage per individual zone & retrofit cost savings calculation + detailed reporting



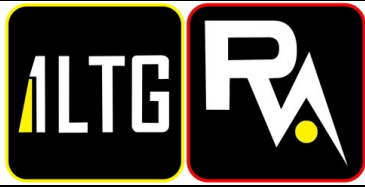

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-BPL-2X2-3M40-5CCT

Line Item#: 7  
[Go to Bill of Materials](#)

Type: SM8

Powered by 4submittal.com





## Compatible Products:

EnVision offers a variety of nodes, sensors, & gateways that are controlled via remote, ENVISIONLS Bluetooth Mesh & SILVAIR Bluetooth Mesh on all of our 0-10V dimmable fixtures.






### Individual Fixture Controls: PIR Sensor, Bi-Level Dimming, Daylight


Basic Note: -1 • ENVISIONLS Models Note: -BT • SILVAIR Models Note: -SL


	MODEL #	DESIGN	RECOMMENDED FIXTURE	FEATURES
	S-TWC-PIR-1 S-TWC-PIR-BT S-TWC-PIR-SL	Twist-C Control Sensor	Sensor Ready Fixtures: Area Lights, Canopies, Flood Lights, High Bays	All models are equipped with PIR occupancy sensing, high & low end bi-level dimming, & daylight sensing.
	S-TWC-90 + S-TWC-PIR-1 S-TWC-90 + S-TWC-PIR-BT S-TWC-90 + S-TWC-PIR-SL	Twist-C Control Sensor + 90 Degree Arm	Cylinders, Strips, Wall Packs	
	S-AUD-PIR-1 S-AUD-PIR-BT S-AUD-PIR-SL	2.5m Audio Jack	Panels & Troffers	
	S-SN-PIR-1 S-SN-PIR-BT S-SN-PIR-SL	Snap In Sensor	Troffers & Wraps	

### Group Controls ENVISIONLS Models Note : -BT • SILVAIR Models Note: -SL

	MODEL #	DESIGN	VOLTAGE	FEATURES	RECOMMENDED FEATURES
	S-CM-PIR-LV-BT S-CM-PIR-LV-SL	Ceiling Mounted PIR Sensor	12-24V	PIR Sensor, Bi-Level Dimming, Daylight, 360° detection, 12' Max Mounting Height	Connects to 0-10V dimmable fixtures
	S-WM-PIR-CUNV-BT S-WM-PIR-CUNV-SL	Wall Mounted PIR Occupancy Sensor, Bi-Level Dimming, Daylight	120-277V	On/Off PIR occupancy sensor, 180° detection, 30' detection @ 4' Mounting Height	Connects to LED fixtures
	S-WS-120V-USB-SL		120V	Dimming Wall Socket, Two Sockets	Floor Lamps, Other Lamps

### Gateway (Silvaire Only) 4.5–5.5 V DC, 2A Power over Ethernet 36–57 V DC

	MODEL #	DESIGN	VOLTAGE	FEATURES	RECOMMENDED FEATURES
	SGW-102	Wall or Ceiling Mounted	POE	Advanced Energy Monitoring Control	Connects to Silvaire Controls. Gateway is not required.

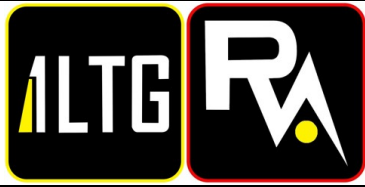

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 8  
[Go to Bill of Materials](#)

Type: SM3

Powered by 4submittal.com




LIGHTING | REINVENTED

plano **ARCH** PRO

## LDLL | Eclipse-II

Product Data Sheet

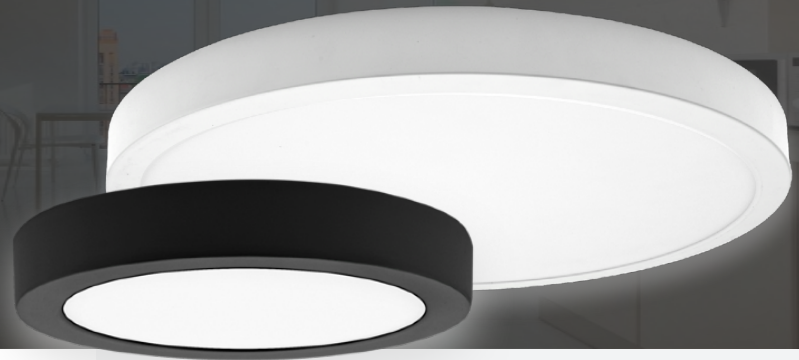

COMMERCIAL-GRADE

### LED Surface Mount Puck Downlight



CCTselect



TruColor Rendering

5" / 7" / 9" / 11" / 13"

#### Product Overview

**INTENDED USE** — The Eclipse-II Series is built for 5-way switchable CCT and is suitable for use in dry, damp, and wet locations, perfect for use in kitchens, hallways, stairways, bathrooms, closets, and just about anywhere you'd need it.

**CONSTRUCTION** — The die-cast aluminum housing is designed for durability and ruggedness.

**INSTALLATION** — Quick-mount aluminum backplate for easy installation.

**WARRANTY** — Featuring a no-compromise 5-year warranty, Energy Star and JA8-compliant, the Eclipse-II is a clean and modern solution for surface mounted driverless design.

ARCHIPELAGO luminaires and LED components undergo rigorous testing by an independent laboratory to meet IESNA LM-79 and LM-80 standards for light output and lumen maintenance. LED color temperature is warranted to shift no more than 180K over the standard warranty period. Correlated Color Temperature (CCT) follows the guidelines set forth in the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

#### Applications



Residential



Hallway



Patio



Entryway

#### Main Features

- Low-Profile Edge-Lit Surface Mount Design
- Durable Di-Cast Aluminum Trim w/ Frosted Lens
- For New Construction or Retrofit Applications
- Suitable for Use in Dry, Damp and Wet Locations
- Suitable for Use in Closets, In Accordance to NEC Guidelines
- Installs on Ceiling and Standard Junction Boxes
- Dimmable to 10% on Compatible TRIAC Dimmers
- 5-Year, 50,000 Hr Warranty
- CEC T24 JA8 Compliant
- NEC Compliant, Suitable for Use in Closet
- Energy Star Certified for 5", 7", 9"

#### Product Warranty\*

5-Year Warranty



50,000 Hrs



\* Standard warranty. Extended warranty available.

Archipelago Lighting, Inc.

| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

[Contact Us](#)





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W


Line Item#: 8  
[Go to Bill of Materials](#)

Type: SM3

Powered by 4submittal.com



LDLL | Eclipse-II

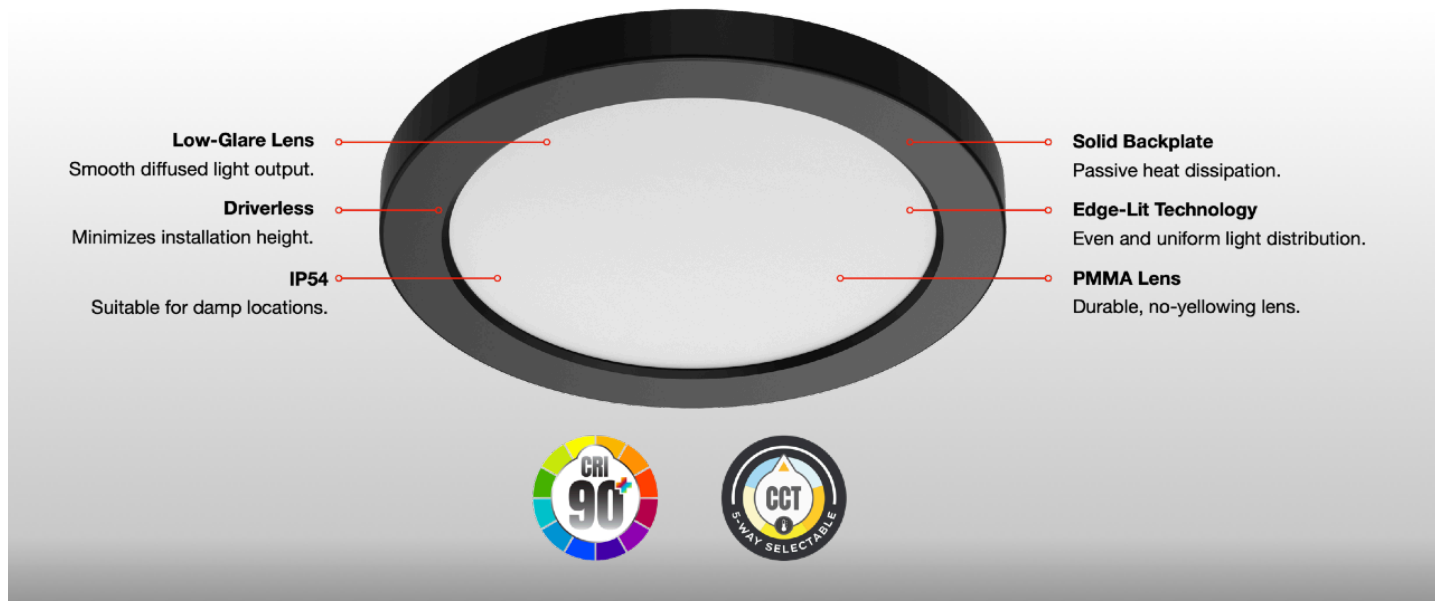

#### Ordering Guide<sup>1</sup>

Model Series	Size (in) / Wattage (W)	Series	CCTselect (K)	Finish Color
<b>LDLL</b> LED Surface Mount Puck Downlight	<b>0510</b> 5inch / 10W <b>0715</b> 7inch / 15W <b>0918</b> 9inch / 18W <b>1121</b> 11inch / 21W <b>1324</b> 13inch / 24W	- <b>E2</b> Eclipse-II	<b>S5</b> 5-CCTselect: 2700K 3000K 3500K 4000K 5000K	/ <b>B</b> Black <b>W</b> White
<b>CATALOG #:</b>				
<b>LDLL</b>		- <b>E2</b>	<b>S5</b>	/

#### Options Guide<sup>2</sup>

EM Driver <sup>3</sup>	Motion Sensor
<input type="checkbox"/> <b>EM15</b> 15W EM Driver <input type="checkbox"/> <b>CRCU</b> 15W EM Driver with Junction Box	<input type="checkbox"/> <b>MSP/W</b> PIR Bi-Level Sensor for 7" and 9" ONLY (White Finish)
<b>OPTIONAL ACCESSORIES #:</b>	

**NOTE:**

1. Only one selection may be applicable within the same category.
2. Multiple selections may be applicable within the same option category. See Compatible Accessories below for details.
3. EM drivers only work with 7, 9, 11 and 13in fixtures

#### Archipelago Lighting, Inc.

| **Headquarter:** 4615 State Street, Montclair, CA 91763


| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

#### Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220








	Date: 1/12/2026	Description: LDLL0510-E2S5/W	Line Item#: 8 <a href="#">Go to Bill of Materials</a>
	Project: FINDLAY FLATS		Type: SM3
	Powered by 4submittal.com		



LDLL | Eclipse-II

Sizing & Measurements


Model Series	Dimensions	Overall Diameter (in)	Depth (IN)
LDLL0510-E2		5.51	0.79
LDLL0715-E2		7.48	0.82
LDLL0918-E2		8.86	0.79
LDLL1121-E2		10.98	0.98
LDLL1124-E2		12.80	0.98

Recommended Dimmers

Make	Models			
Lutron	TG-600PR-WH S-600PR-WH CTCL-153PDH-WH	TGCL-153PH-LA SLV-600P-AL DV-600PR-WH	SCL-153PH-WH GT-600P DVCL-153P	MSCL-OP153M MACL-153M//MA-R PD-6WCL
Leviton	6672 IPL06	6674	DSL06	RNL06

Accessories (Standard)

Accessories (Optional)



<b>Mounting Bracket</b> Compatible to 2.75" or 3.50" Junction Box	<b>Wire Nuts</b>	<b>Bolts</b>	<b>15W EM Driver</b> EM15-HMB/170DC CRCU-EM/JBM	<b>PIR Bi-Level Sensor</b> LDLL-E2/MSP/W
--	------------------	--------------	---	---



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W


Line Item#: 8  
[Go to Bill of Materials](#)

Type: SM3  
  
Powered by 4submittal.com




LDLL | Eclipse-II

EM Driver / J-Box (Optional)

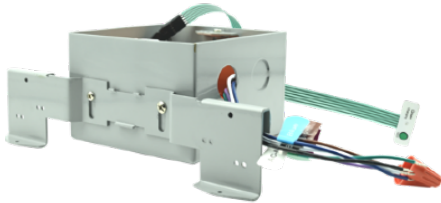

Technical Specification	CRCU-EM/JBM
Emergency Power	15W Max
Installation Method	Recessed
IP Rating	IP20
CEC T.24/JA8 Compliant	Yes
Color Finish	Grey
Physical Features	<ul style="list-style-type: none"><li>Directly connect to AC input</li><li>Fits 2.75" and 3.5" J-Box</li><li>Supports recessed in-ceiling mount</li></ul>
Self-Diagnostic Test Switch	<ol style="list-style-type: none"><li>Emergency conversion kit will go into emergency mode when test switch is pressed while main power is ON.</li><li>Will go into charging mode if test switch is not pressed.</li><li>In emergency mode, pressing the test switch for 3-seconds will inactivate emergency mode.</li></ol>
Indicator Status Light	<ol style="list-style-type: none"><li>Green ON: Charging mode / charging full</li><li>Green OFF: Mains power OFF / discharging mode</li></ol>
Dimension	<div>W4.29in x H2.96</div> <div></div>



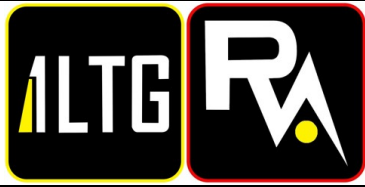

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-DH-HO

Line Item#: 9  
[Go to Bill of Materials](#)

Type: EM

Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Emergency Bug Eyes Square Models



Emergency



### Detail Specifications:

- Finish: White
- IP Rating: Dry Location
- Lumen Options
  - Standard: 3W 140LM
  - High Output: 6W 650LM
- Operating Temperature: -40° - 104° F
- Average life (L70) of 50,000 hours

### Applications:

- Exit Doors
- Corridor Intersections
- Exit Stairways
- Exit ramps

### Product Information:

- Built-in test switch and charge indicator light
- Overcharge and over-discharge protection
- Injection-molded thermoplastic housing, PC cover
- Backup Time: >90 minutes
- Recharge time: 24 hours

### Driver Options:

- Dual Voltage 120/277V
- PF >0.9, 50/60Hz
- Nickel Cadmium Battery 3.6V
- This fixture is non-dimmable

### Mounting & Installation:

- Wall and ceiling mounted
- Universal J-box mounting pattern

### Certifications:

- UL Listed for USA and CA (UL94V-0 Flame Rating)
- Meets UL924, NDPA 101
- Approved for CA T24
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

Series

**LED-EM-DH**

3W • 140Lm

**LED-EM-DH-HO**


6W • 650Lm

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 01.24

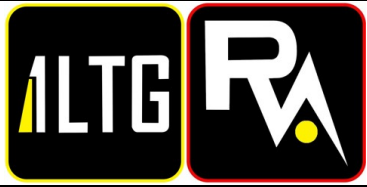

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-DH-HO

Line Item#: 9  
[Go to Bill of Materials](#)


Type: EM

Powered by 4submittal.com


**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Emergency Bug Eyes Square Models

### FEATURES

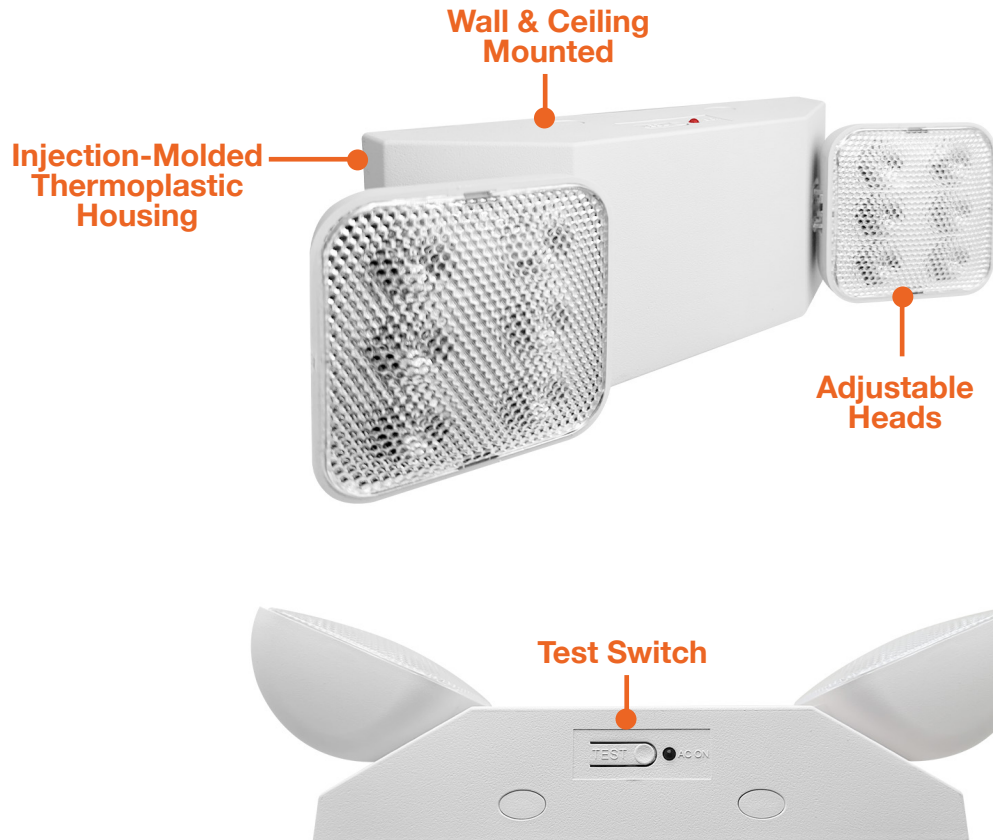


### DIMENSIONS

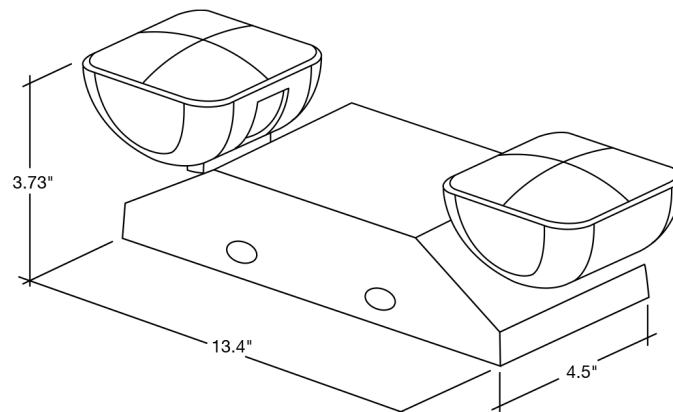


*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

	Date: 1/12/2026	Description: 604-SP	Line Item#: 10
	Project: FINDLAY FLATS		<a href="#">Go to Bill of Materials</a>
			Type: K1
Powered by 4submittal.com			

SKU	604-SP	
descriptionLabel	Eaton lampholder, 3.25 in box mounting, Keyless switch, Pull chain, #14-10 AWG, Medium base, White, Porcelain, 250V, 660W, Feed-through wiring 750625	
General specifications	Product Name	Eaton lampholder
	Catalog Number	604-SP
	UPC	032664750625
	Product Length/Depth	1.88 in
	Product Height	4.63 in
	Product Width	4.63 in
	Product Weight	0.01 lb
	Compliances	RoHS Compliant
	Certifications	cULus Listed NOM
	Global Catalog	604-SP
	Product Type	Lampholder
Product specifications	Special features	Keyless switch
	Base type	Medium
	Voltage rating	250 V
	Wattage	660W
	Color	White
	Mounting Method	3.25 inch box
	Wiring method	Feed-through wiring
	Actuator	Pull chain
	Allowable wire size	#14-10 AWG
	Torque rating	14 lbf-inch
Catalogs	Material	Porcelain
	<a href="#">Residential Buyers Guide B-58</a>	
Specifications and datasheets	<a href="#">Eaton Specification Sheet - 604-SP</a>	
Date	Mon Jan 12 2026	

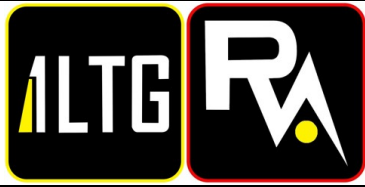

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-FLM-A19-8.5W-30K-D-JA8

Line Item#: 11  
[Go to Bill of Materials](#)


Type: K1 LAMP

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## A-19 Bulb Filament Series

LED Bulbs

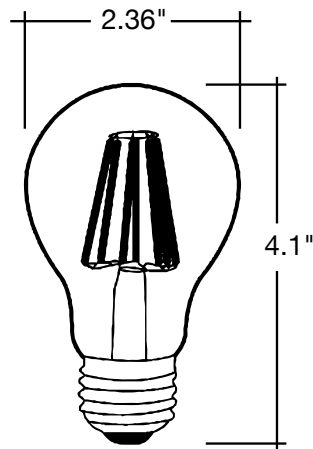

### Detail Specifications

- IP Rating: Damp Location
- Beam Angle: Omni-Directional 360°
- Chip: Filament, R9- 78, CRI >90
- Operating Temperature: -4° - 114° F
- Average life (L70) of 25,000 hours

### Applications:

- Decorative Lighting
- Interior Lighting
- Table & Floor Lamps
- Showcases
- Residential, Multi-Family, Commercial

### Product Information:

- Suitable for use in existing fixtures
- Instant-On to full brightness

### Driver Options:

- 120V
- Triac Dimmable
- PF >0.9, 50/60Hz

### Mounting & Installation:

- E26 Socket
- Direct A Lamp Replacement

### Certifications:

- UL Listed for USA and CA
- Energy Star
- Title 20 and JA8-2022 Approved (8.5W Model Only)
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

### Dimmer List:

Leviton	6674
Lutron	LGCL-153P
Lutron	DVCL-153P
Lutron	CTCL-153P
Lutron	MAELV-300

### Series

**LED-FLM-A19-8.5W-30K-D-JA8**

550 Lumens 60W Equivalent

**LED-FLM-A19-10W-27K**


1,000 Lumens 100W Equivalent

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 10.23

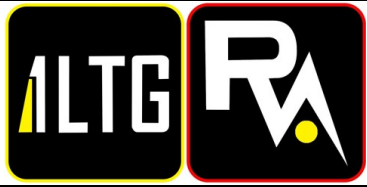

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 12  
[Go to Bill of Materials](#)

Type: SM1

Powered by 4submittal.com




LIGHTING | REINVENTED

plano **ARCH** PRO

## LDLL | Eclipse-II

Product Data Sheet

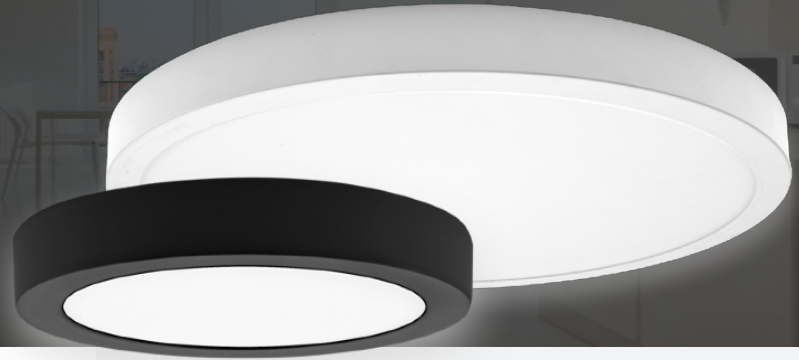

COMMERCIAL-GRADE

### LED Surface Mount Puck Downlight



CCTselect



TruColor Rendering

5" / 7" / 9" / 11" / 13"

#### Product Overview

**INTENDED USE** — The Eclipse-II Series is built for 5-way switchable CCT and is suitable for use in dry, damp, and wet locations, perfect for use in kitchens, hallways, stairways, bathrooms, closets, and just about anywhere you'd need it.

**CONSTRUCTION** — The die-cast aluminum housing is designed for durability and ruggedness.

**INSTALLATION** — Quick-mount aluminum backplate for easy installation.

**WARRANTY** — Featuring a no-compromise 5-year warranty, Energy Star and JA8-compliant, the Eclipse-II is a clean and modern solution for surface mounted driverless design.

ARCHIPELAGO luminaires and LED components undergo rigorous testing by an independent laboratory to meet IESNA LM-79 and LM-80 standards for light output and lumen maintenance. LED color temperature is warranted to shift no more than 180K over the standard warranty period. Correlated Color Temperature (CCT) follows the guidelines set forth in the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

#### Applications



Residential



Hallway



Patio



Entryway

#### Main Features

- Low-Profile Edge-Lit Surface Mount Design
- Durable Di-Cast Aluminum Trim w/ Frosted Lens
- For New Construction or Retrofit Applications
- Suitable for Use in Dry, Damp and Wet Locations
- Suitable for Use in Closets, In Accordance to NEC Guidelines
- Installs on Ceiling and Standard Junction Boxes
- Dimmable to 10% on Compatible TRIAC Dimmers
- 5-Year, 50,000 Hr Warranty
- CEC T24 JA8 Compliant
- NEC Compliant, Suitable for Use in Closet
- Energy Star Certified for 5", 7", 9"

#### Product Warranty\*

5-Year Warranty



50,000 Hrs



\* Standard warranty. Extended warranty available.

Archipelago Lighting, Inc.

| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

[Contact Us](#)





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W


Line Item#: 12  
[Go to Bill of Materials](#)

Type: SM1

Powered by 4submittal.com



LDLL | Eclipse-II

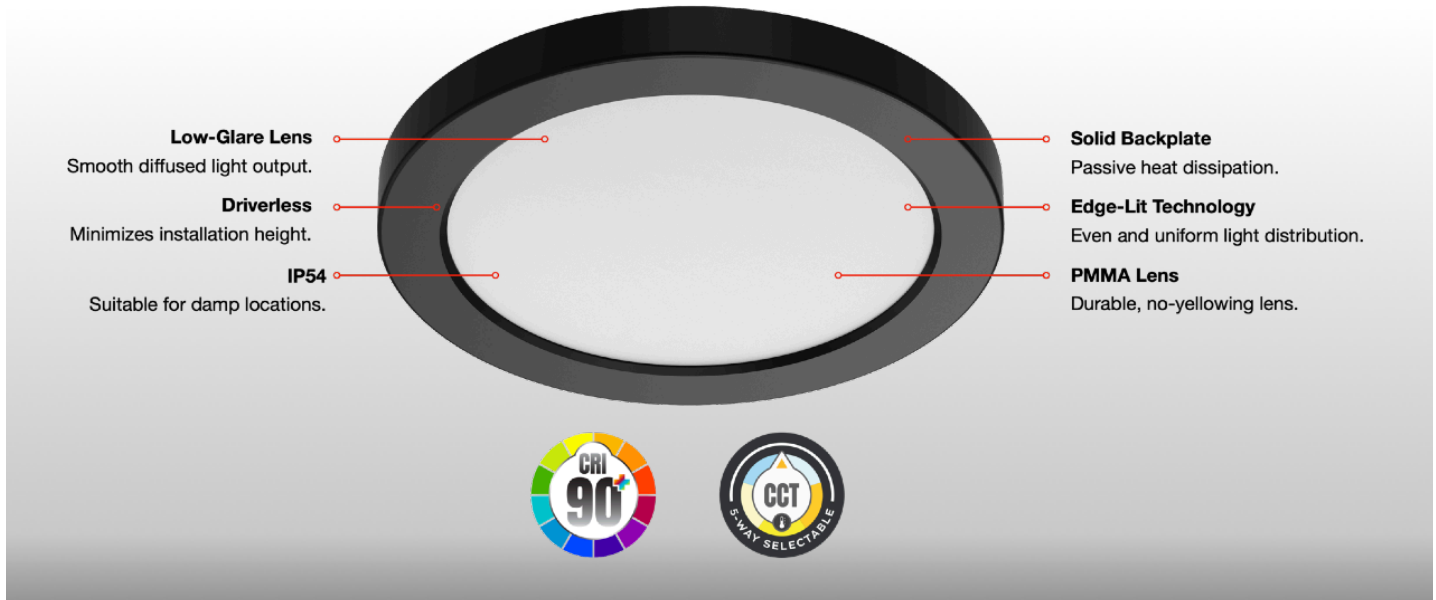

#### Ordering Guide<sup>1</sup>

Model Series	Size (in) / Wattage (W)		Series	CCTselect (K)	Finish Color
<b>LDLL</b> LED Surface Mount Puck Downlight	<b>0510</b> 5inch / 10W <b>0715</b> 7inch / 15W <b>0918</b> 9inch / 18W <b>1121</b> 11inch / 21W <b>1324</b> 13inch / 24W	-	<b>E2</b> Eclipse-II	<b>S5</b> 5-CCTselect: 2700K 3000K 3500K 4000K 5000K	/ <b>B</b> Black <b>W</b> White
<b>CATALOG #:</b>					
<b>LDLL</b>		-	<b>E2</b>	<b>S5</b>	/

#### Options Guide<sup>2</sup>

EM Driver <sup>3</sup>	Motion Sensor
<input type="checkbox"/> <b>EM15</b> 15W EM Driver <input type="checkbox"/> <b>CRCU</b> 15W EM Driver with Junction Box	<input type="checkbox"/> <b>MSP/W</b> PIR Bi-Level Sensor for 7" and 9" ONLY (White Finish)
<b>OPTIONAL ACCESSORIES #:</b>	
	/

**NOTE:**

- Only one selection may be applicable within the same category.
- Multiple selections may be applicable within the same option category. See Compatible Accessories below for details.
- EM drivers only work with 7, 9, 11 and 13in fixtures

#### Archipelago Lighting, Inc.


| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

#### Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)






+1 (866) 912-3220

	Date: 1/12/2026	Description: LDLL0510-E2S5/W	Line Item#: 12
	Project: FINDLAY FLATS		<a href="#">Go to Bill of Materials</a>
			Type: SM1
Powered by 4submittal.com			



LDLL | Eclipse-II

Sizing & Measurements


Model Series	Dimensions	Overall Diameter (in)	Depth (IN)
LDLL0510-E2		5.51	0.79
LDLL0715-E2		7.48	0.82
LDLL0918-E2		8.86	0.79
LDLL1121-E2		10.98	0.98
LDLL1124-E2		12.80	0.98

Recommended Dimmers

Make	Models			
Lutron	TG-600PR-WH S-600PR-WH CTCL-153PDH-WH	TGCL-153PH-LA SLV-600P-AL DV-600PR-WH	SCL-153PH-WH GT-600P DVCL-153P	MSCL-OP153M MACL-153M//MA-R PD-6WCL
Leviton	6672 IPL06	6674	DSL06	RNL06

Accessories (Standard)

Accessories (Optional)



<b>Mounting Bracket</b>	<b>Wire Nuts</b>	<b>Bolts</b>	<b>15W EM Driver</b>	<b>PIR Bi-Level Sensor</b>
Compatible to 2.75" or 3.50" Junction Box			EM15-HMB/170DC CRCU-EM/JBM	LDLL-E2/MSP/W

Archipelago Lighting, Inc.

| Headquarter: 4615 State Street, Montclair, CA 91763


| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220



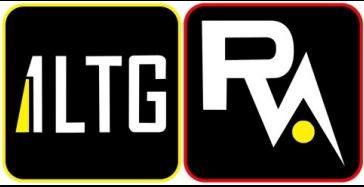

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 12  
[Go to Bill of Materials](#)


Type: SM1

Powered by 4submittal.com



LDLL | Eclipse-II

EM Driver / J-Box (Optional)

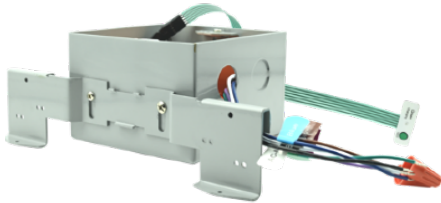

Technical Specification	CRCU-EM/JBM
Emergency Power	15W Max
Installation Method	Recessed
IP Rating	IP20
CEC T.24/JA8 Compliant	Yes
Color Finish	Grey
Physical Features	<ul style="list-style-type: none"><li>Directly connect to AC input</li><li>Fits 2.75" and 3.5" J-Box</li><li>Supports recessed in-ceiling mount</li></ul>
Self-Diagnostic Test Switch	<ol style="list-style-type: none"><li>Emergency conversion kit will go into emergency mode when test switch is pressed while main power is ON.</li><li>Will go into charging mode if test switch is not pressed.</li><li>In emergency mode, pressing the test switch for 3-seconds will inactivate emergency mode.</li></ol>
Indicator Status Light	<ol style="list-style-type: none"><li>Green ON: Charging mode / charging full</li><li>Green OFF: Mains power OFF / discharging mode</li></ol>
Dimension	<p>W4.29in x H2.96</p>

Archipelago Lighting, Inc.


| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220

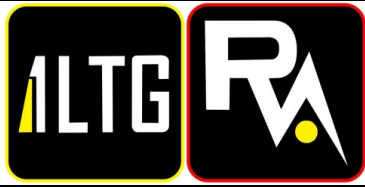

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-VT-ADJ-24-21W-5CCT-BN

Line Item#: 13  
[Go to Bill of Materials](#)


Type: V1

Powered by 4submittal.com

**EnVisionLED**<sup>TM</sup>  
WWW.ENVISIONLEDLIGHTING.COM

## Vanity Fixtures

### Square Adjustable Swivel

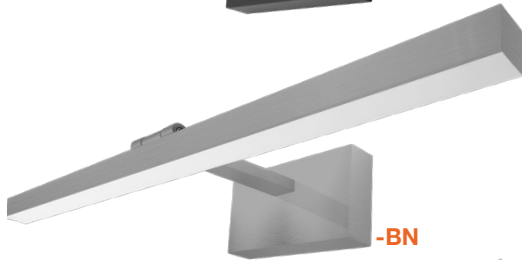

FRONT VIEW



90° Rotatable Angle

Vanity Fixture



#### Detail Specifications:

- Power: 21W
- Lumens: 2,700
- Finishes: Black, Brushed Nickel, Chrome
- IP Rating: IP54 Damp Location
- Beam Angle: 100°
- Chip: SMD 2835, R9 >50, CRI >90
- Operating Temperature: -40° - 114° F
- Lens: Frosted Acrylic, non-yellowing
- Average life (L70) of 50,000 hours

#### Applications:

- Bathrooms & Lavatories
- Hallways & Corridors
- Artwork, Museums
- Residential & Multifamily
- Education, Healthcare, Retail, Hospitality

#### Product Information:

- Available in 23.6" length
- Adjustable Angle: Lens swivels up and down
- Wide j-box for easier installation in retrofit and new construction applications
- Select-n-Switch Technology: 5-CCT Selectable

#### Driver Options:

- Triac & ELV dimmable down to 5%
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz
- Built in 2.5Kv Surge Protector
- Flicker Free

#### Mounting & Installations:

- 30/40 Junction Box
- Surface mount bracket included

#### Certifications:

- ETL Listed for USA and CA
- CA Title 24 JA8-2022 CEC Listed
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

#### Series

LED-VT-ADJ-24-21W-5CCT-BL

Black

LED-VT-ADJ-24-21W-5CCT-BN

Brushed Nickel

LED-VT-ADJ-24-21W-5CCT-CH


Chrome

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 04.25

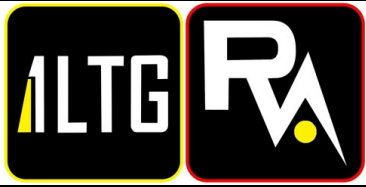

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-VT-ADJ-24-21W-5CCT-BN

Line Item#: 13  
[Go to Bill of Materials](#)

Type: V1

Powered by 4submit.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM


## Vanity Fixtures

### Square Adjustable Swivel

#### FEATURES




90° Rotatable Angle



5-CCT Selectable

#### MEASUREMENTS

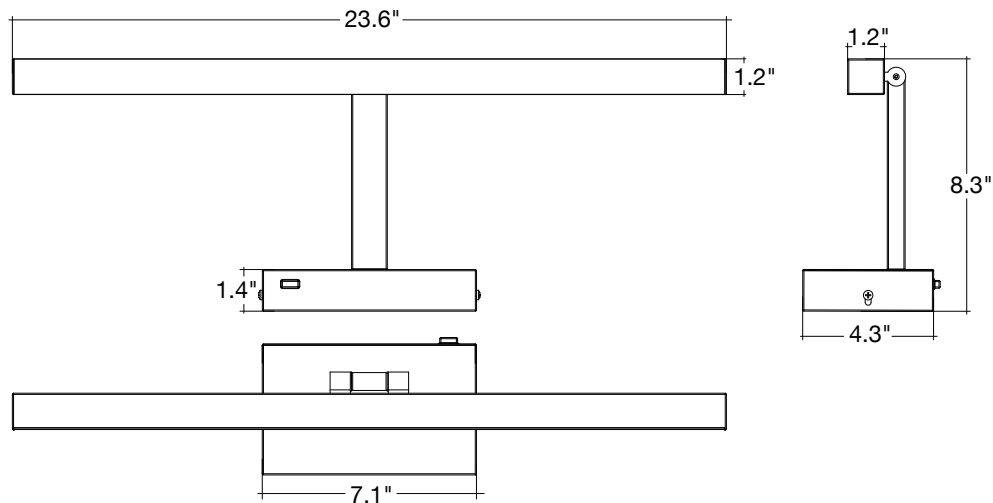

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)



Date: 1/12/2026

Project:  
FINDLAY FLATSDescription:  
LED-RST-4FT-3M40W-4CCT-SRLine Item#: 15  
[Go to Bill of Materials](#)

Type: ST1

Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Round LED Strip Fixtures

### 5-CCT & 3-Power Selectable

### Sensor Ready



3M25W		3M40W		3M60W		3M80W		3M100W	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
15	2,100	20	2,600	40	5,200	50	6,500	70	9,100
20	2,800	30	3,900	50	6,500	65	8,450	85	11,050
25	3,500	40	5,200	60	7,800	80	10,400	100	13,000

Project: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_

Strips

**Detail Specification:**

- Finish: White, Custom finishes available
- IP Rating: Damp Location (IP44)
- Beam Angle: 130°
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 122° F
- Lens: Round Acrylic Frosted Lens
- Average life (L70) of 50,000 hours

**Applications:**

- Stairwell & Hallways
- Utility & Storage
- Garage Structures
- Office and Meeting Rooms
- Shop Lighting
- Commercial and Industrial

**Product Information:**

- Aluminum housing finished with corrosion free power coat
- Easy j-box access: snap on and off tool-less design
- 40 J-box cover included with every fixture
- Audio Jack Sensor Ready (with RST-SR bracket)
- Sensor Options:
  - Standard Sensors
  - SILVAIR Bluetooth Mesh
  - ENVISIONLS Bluetooth
  - [Click Here](#) for More Information

**Driver Options:**

- UNV: 120-277V 0-10V Dimmable
- Optional 347-480V step down transformer available
- THD: <15% (+/-5% tolerance), PF >0.9, 50/60Hz
- 12V low voltage aux output for controls
- Flicker Free

**Mounting & Installation**

- Surface mount into 30 or 40 j-box
- Optional 10' & 20' suspension kit available
- Optional 6' chain mount available
- Rated for installation in closets

**Certifications**

- UL Listed for USA and CA
- DLC Premium Listed
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

Series	Sensor <sup>1</sup>	Emergency <sup>2</sup>	Finish <sup>3</sup>	Flex
LED-RST-2FT-3M25W-5CCT-SR	(Blank)	(Blank)	(Blank)	(Blank)
LED-RST-4FT-3M40W-5CCT-SR	No Sensor	No Emergency	White	No Flex
LED-RST-4FT-3M80W-5CCT-SR	BMS <sup>1</sup>	Backup	BL	6FLX
LED-RST-8FT-3M60W-5CCT-SR	Microwave	EMB	Black	6' Flex
LED-RST-8FT-3M100W-5CCT-SR	Bi-Level Motion	Emergency	GRY <sup>3</sup>	Whip
	+ Daylight Sensor	EMB20	Gray	
	(Internal Sensor)	Backup	BRZ <sup>3</sup>	
	BMSPIR	Emergency	Bronze	
	Available for field install.	Backup (20W)	CS <sup>3</sup>	
			Custom Color	

1. Sensor Note:  
Microwave: Detects motion through barriers such as walls, and doors. Ideal for applications where obstacles might obstruct the line of sight. Works effectively outdoors, in large open spaces, & parking lots. Do not use in areas of high vibrations or metal.  
PIR: Ideal for indoor environments with clear lines of sight to the area of interest. Detects warm objects, like a person or animal. Good for high vibration, areas of metal.

2. Standard emergency is 8W (1,040LM). 20W available, inquire factory

3. Standard quick ship finish is white & black. Other colors are custom finishes.

**Optional Accessories (Order Separately)**

Sensors	Suspension Kit	Accessories	Wire Guards
<b>RST-SR</b> Receptacle for Sensor (Required for below sensors)	<b>SK-10FT-Y-LC-PD</b> 10' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)	<b>RST-SM-CN</b> Surface mount linkable bracket	<b>RST-2FT-WG</b> 2ft Wire Guard
<b>S-AUD-PIR-1</b> PIR Bi-Level Motion + Daylight Sensor Remote Required: (S-LINE-R)	<b>SK-20FT-Y-LC-PD</b> 20' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)	<b>RST-PDM-CN</b> Pendant mount linkable bracket	<b>RST-4FT-WG</b> Wire Guard (order 2 for 8ft fixtures)
<b>S-AUD-PIR-BT</b> PIR ENVISIONLS Bluetooth Control			
<b>S-AUD-PIR-SL</b> PIR SILVAIR Bluetooth Mesh			

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 10.25



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-RST-4FT-3M40W-4CCT-SR

Line Item#: 15  
[Go to Bill of Materials](#)

Type: ST1


Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM


## Round LED Strip Fixtures


### 5-CCT & 3-Power Selectable

#### FEATURES

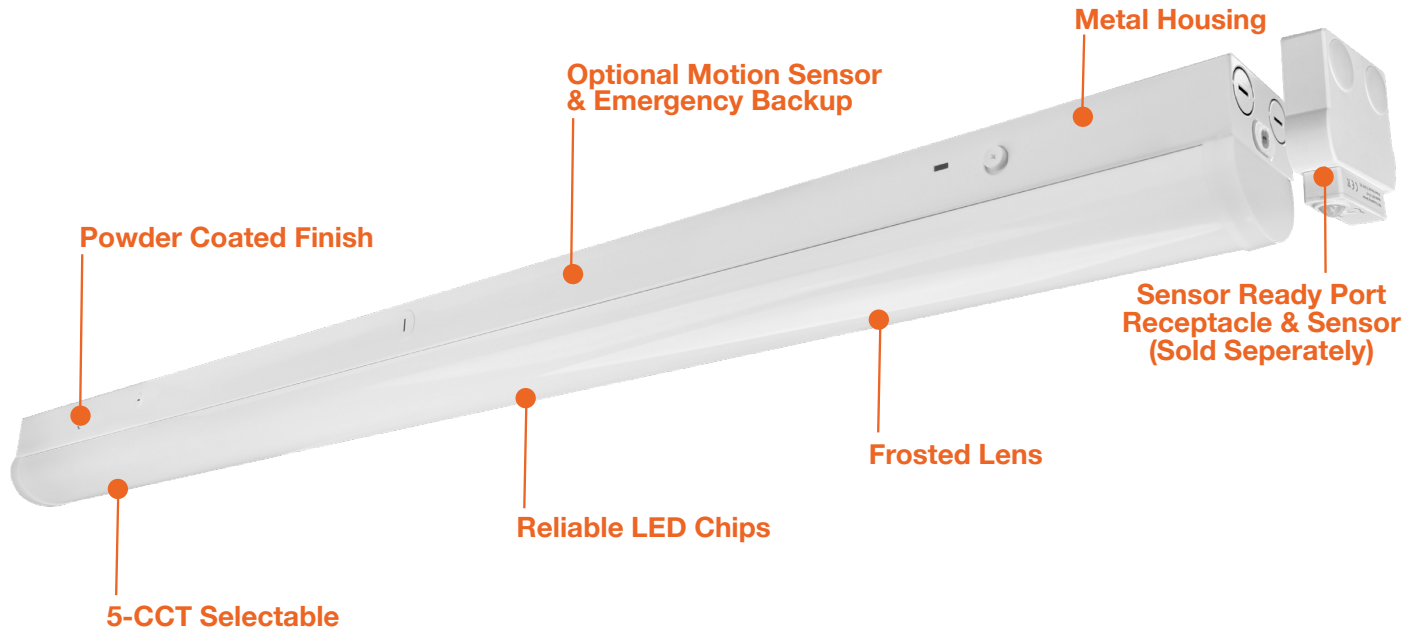

#### DIMENSIONS

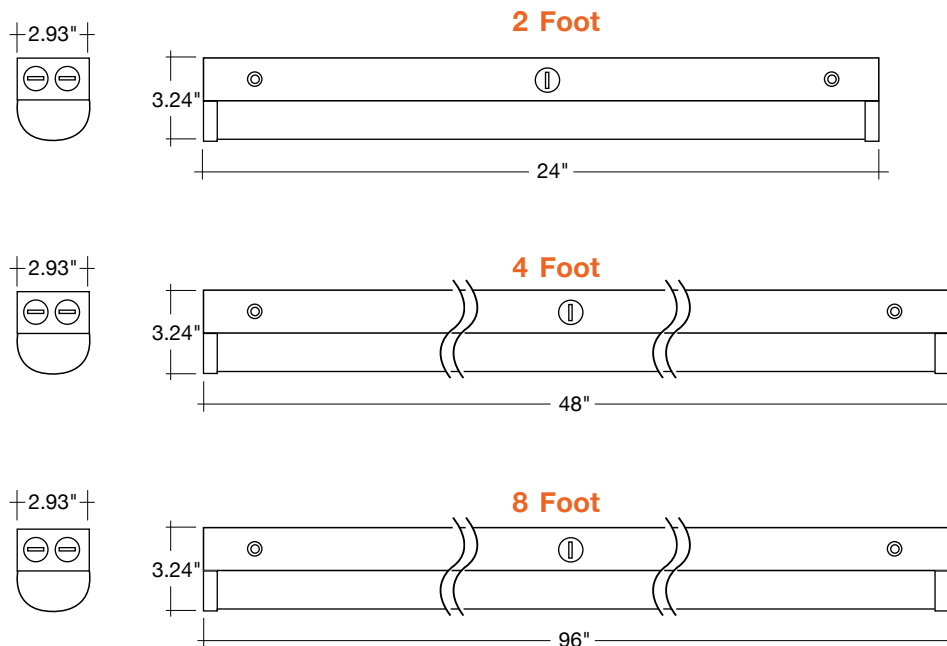

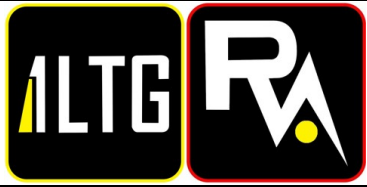

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-RST-4FT-3M40W-4CCT-SR

Line Item#: 15  
[Go to Bill of Materials](#)

Type: ST1

Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Round LED Strip Fixtures G3

### 4-CCT & 3-Power Selectable

#### ACCESSORIES



RST-SR



S-AUD-PIR-1  
S-AUD-PIR-BT  
S-AUD-PIR-SL



SK-10FT-Y-LC-PD  
SK-20FT-Y-LC-PD




RST-SM-CN




RST-PDM-CN




RST-2FT-WG  
RST-4FT-WG

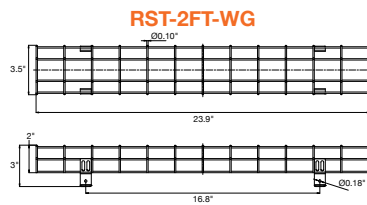

RST-2FT-WG

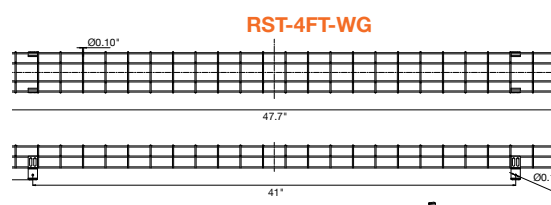

RST-4FT-WG



2-RST-4FT-WG FOR 8FT



Model	Voltage	Watts	Lumens	Color	CRI
LED-RST-2FT-3M25W-5CCT-SR	120-277V	25/20/15w	3,500/2,800/2,100	30/35/40/50/65k	>80
LED-RST-4FT-3M40W-5CCT-SR	120-277V	40/30/20w	5,200/3,900/2,600	30/35/40/50/65k	>80
LED-RST-4FT-3M80W-5CCT-SR	120-277V	80/65/50w	10,400/8,450/6,500	30/35/40/50/65k	>80
LED-RST-8FT-3M60W-5CCT-SR	120-277V	60/50/40w	7,800/6,500/5,200	30/35/40/50/65k	>80
LED-RST-8FT-3M100W-5CCT-SR	120-277V	100/85/70w	13,000/11,050/9,100	30/35/40/50/65k	>80

#### SENSORS

Pre-Installed Accessory Model	Description
RST-SR	Sensor Receptacle (REQUIRED)
S-AUD-PIR-1	PIR Bi-Level + Daylight: Audio Jack
S-AUD-PIR-BT	PIR Bi-Level + Daylight: Audio Jack Bluetooth EnVisionLS App
S-AUD-PIR-SL	PIR Bi-Level + Daylight: Audio Jack SILVAIR

#### SUSPENSION KIT


Model	Description
SK-10FT-Y-LC-PD	10' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)
SK-20FT-Y-LC-PD	20' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)

#### ACCESSORIES

Model	Description
RST-SM-CN	Surface Mount Linkable Bracket
RST-PDM-CN	Pendant Mount Linkable Bracket

#### WIRE GUARDS

Model	Description
RST-2FT-WG	2ft Wire Guard
RST-4FT-WG	4ft Wire Guard (order 2 for 8ft fixtures)

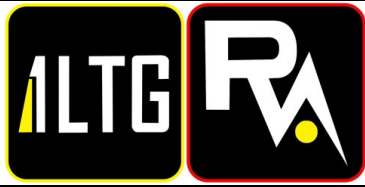

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-RST-4FT-3M40W-4CCT-SR









Line Item#: 15  
[Go to Bill of Materials](#)

Type: ST1

Powered by 4submittal.com

## EnVisionLED™ Control Options

EnVision LED offers 3 control systems compatible with our LED Fixtures for projects of all sizes and budgets.

	Basic Controls	EnVisionLS 	EnVisionLED™ x SILVAIR 
<b>Description</b>	Standard Plug In Sensors	Basic Bluetooth Wireless Control	Advanced Bluetooth Wireless Control
<b>Recommended Quantity</b> (but not limited to)	N/A	>40-50 Nodes	>50 Nodes
<b>Maximum Zone Quantity</b>	N/A	100	3,000
<b>Commissioning Tool</b>	Remote Only	  ENVISIONLS App 	  SILVAIR App 
<b>Commissioning Process</b>	Individually Set via Remote	Wireless Must be done on site	Wireless- Initial linking must be done on site. Commissioning can be done via desktop remotely.
<b>Floor Plan Upload</b>	N/A	N/A	Yes Add a floor plan and mark luminaires & zones via desktop
<b>Gateway</b>	N/A	N/A	Required only for energy monitoring, advanced scheduling, automated demand response.
<b>Individual Luminaire Control</b>	Yes	Yes	Yes
<b>Luminaire Grouping Zoning</b>	N/A	Yes	Yes
<b>High End Power Low End Power</b>	Yes but limited (View Remote)	Yes	Yes
<b>Cost</b>	\$	\$\$	\$\$\$
<b>DLC NLC Listed</b>	N/A	Yes	Yes
<b>Energy Monitoring &amp; Data Reporting</b>	N/A	N/A	Monitor energy usage per individual zone & retrofit cost savings calculation + detailed reporting







Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-RST-4FT-3M40W-4CCT-SR

Line Item#: 15  
[Go to Bill of Materials](#)

Type: ST1

Powered by 4submittal.com





## Compatible Products:

EnVision offers a variety of nodes, sensors, & gateways that are controlled via remote, ENVISIONLS Bluetooth Mesh & SILVAIR Bluetooth Mesh on all of our 0-10V dimmable fixtures.






### Individual Fixture Controls: PIR Sensor, Bi-Level Dimming, Daylight


Basic Note: -1 • ENVISIONLS Models Note: -BT • SILVAIR Models Note: -SL

	MODEL #	DESIGN	RECOMMENDED FIXTURE	FEATURES
	S-TWC-PIR-1 S-TWC-PIR-BT S-TWC-PIR-SL	Twist-C Control Sensor	Sensor Ready Fixtures: Area Lights, Canopies, Flood Lights, High Bays	All models are equipped with PIR occupancy sensing, high & low end bi-level dimming, & daylight sensing.
	S-TWC-90 + S-TWC-PIR-1 S-TWC-90 + S-TWC-PIR-BT S-TWC-90 + S-TWC-PIR-SL	Twist-C Control Sensor + 90 Degree Arm	Cylinders, Strips, Wall Packs	
	S-AUD-PIR-1 S-AUD-PIR-BT S-AUD-PIR-SL	2.5m Audio Jack	Panels & Troffers	
	S-SN-PIR-1 S-SN-PIR-BT S-SN-PIR-SL	Snap In Sensor	Troffers & Wraps	


### Group Controls ENVISIONLS Models Note : -BT • SILVAIR Models Note: -SL

	MODEL #	DESIGN	VOLTAGE	FEATURES	RECOMMENDED FEATURES
	S-CM-PIR-LV-BT S-CM-PIR-LV-SL	Ceiling Mounted PIR Sensor	12-24V	PIR Sensor, Bi-Level Dimming, Daylight, 360° detection, 12' Max Mounting Height	Connects to 0-10V dimmable fixtures
	S-WM-PIR-CUNV-BT S-WM-PIR-CUNV-SL	Wall Mounted PIR Occupancy Sensor, Bi-Level Dimming, Daylight	120-277V	On/Off PIR occupancy sensor, 180° detection, 30' detection @ 4' Mounting Height	Connects to LED fixtures
	S-WS-120V-USB-SL		120V	Dimming Wall Socket, Two Sockets	Floor Lamps, Other Lamps

### Gateway (Silvaire Only) 4.5–5.5 V DC, 2A Power over Ethernet 36–57 V DC

	MODEL #	DESIGN	VOLTAGE	FEATURES	RECOMMENDED FEATURES
	SGW-102	Wall or Ceiling Mounted	POE	Advanced Energy Monitoring Control	Connects to Silvaire Controls. Gateway is not required.



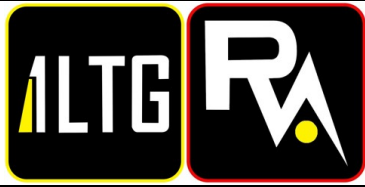

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-EXT-RG-WH-CMB-RC

Line Item#: 16  
[Go to Bill of Materials](#)

Type: EX/EM

Powered by 4submittal.com

**EnVisionLED**<sup>TM</sup>  
[WWW.ENVISIONLEDLIGHTING.COM](http://WWW.ENVISIONLEDLIGHTING.COM)

## Emergency Exit Sign With Bug Eyes



### Emergency Exit Signs



#### Detail Specifications:

- Finish: White Finish
- IP Rating: IP20, Dry Location
- Wattage: 3.5W
- Lumens: 140
- Operating Temperature: 32°F to 104°F
- Lens: Red or Green
- Remoted Capable
- Compatible with: LED-EM-RC-1, LED-EM-RC-2
- Average life (L70) of 50,000 hours

#### Applications:

- Exit Doors
- Corridor Intersections
- Exit Stairways
- Exit Ramps

#### Product Information:

- Built-in test switch and charge indicator
- Injection-molded thermoplastic housing, PC cover
- Backup Time: >90 minutes
- Recharge time: 24 hours
- Single Face
- 6" height letters with 3/4" stroke, viewable from 100ft away

#### Driver Options:

- Dual Voltage 120/277V
- PF >0.9, 50/60Hz

#### Mounting & Installations:

- Wall and ceiling mounted
- Universal J-box mounting pattern

#### Certifications:

- UL Listed for USA and CA (UL94V-0 Flame Rating)
- Meets UL924, NDPA 101
- Approved for CA T24
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

#### REMOTE HEAD OPTIONS

LED-EM-RC-1

LED-EM-RC-2

Series

**LED-EM-EXT-RG-WH-CMB-RC**


Red/Green Color Selectable

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 08.25

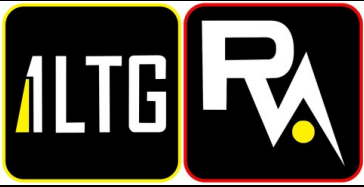

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-EXT-RG-WH-CMB-RC

Line Item#: 16  
[Go to Bill of Materials](#)


Type: EX/EM

Powered by 4submit.com


**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## Emergency Exit Sign With Bug Eyes

### FEATURES

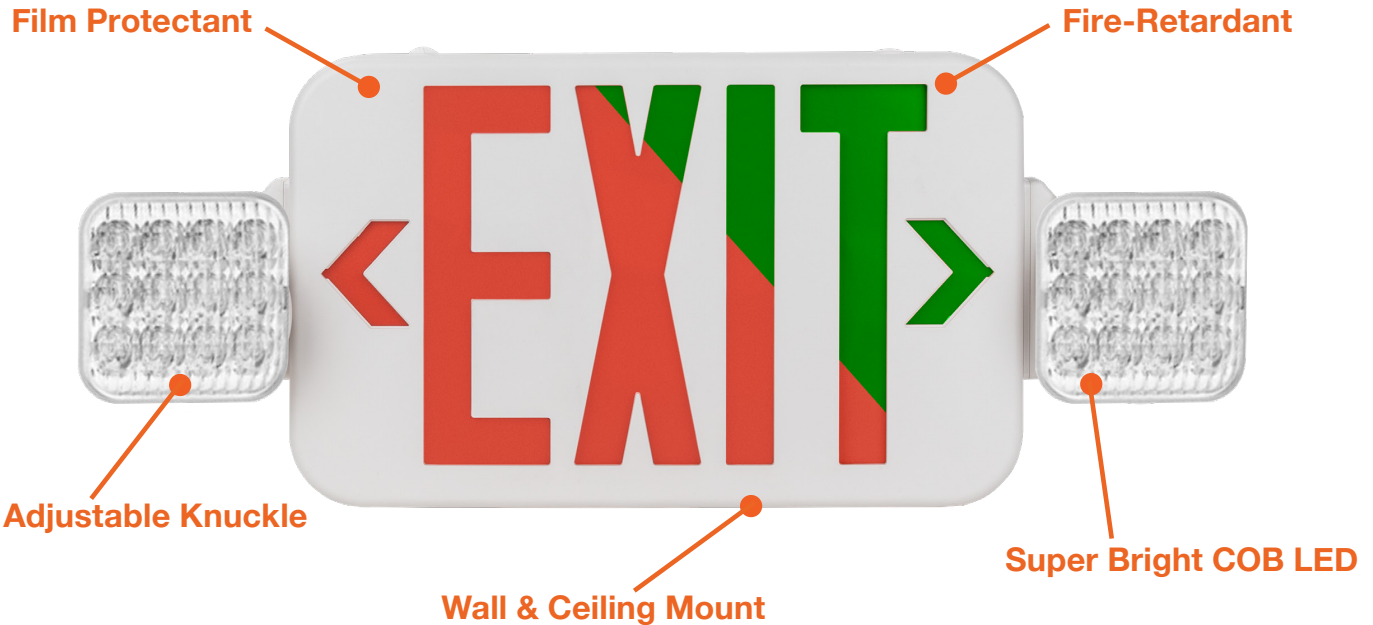


### DIMENSIONS

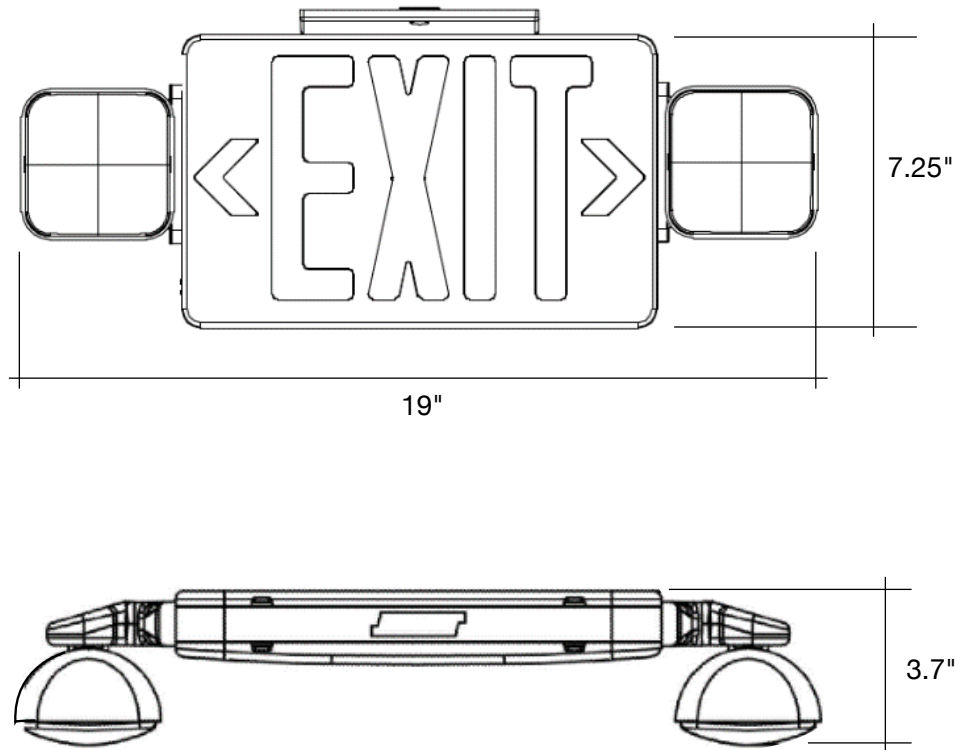

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

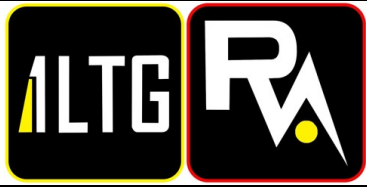

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-DH-HO

Line Item#: 17  
[Go to Bill of Materials](#)

Type: EM

Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Emergency Bug Eyes Square Models



Emergency



### Detail Specifications:

- Finish: White
- IP Rating: Dry Location
- Lumen Options
  - Standard: 3W 140LM
  - High Output: 6W 650LM
- Operating Temperature: -40° - 104° F
- Average life (L70) of 50,000 hours

### Applications:

- Exit Doors
- Corridor Intersections
- Exit Stairways
- Exit ramps

### Product Information:

- Built-in test switch and charge indicator light
- Overcharge and over-discharge protection
- Injection-molded thermoplastic housing, PC cover
- Backup Time: >90 minutes
- Recharge time: 24 hours

### Driver Options:

- Dual Voltage 120/277V
- PF >0.9, 50/60Hz
- Nickel Cadmium Battery 3.6V
- This fixture is non-dimmable

### Mounting & Installation:

- Wall and ceiling mounted
- Universal J-box mounting pattern

### Certifications:

- UL Listed for USA and CA (UL94V-0 Flame Rating)
- Meets UL924, NDPA 101
- Approved for CA T24
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

#### Series

**LED-EM-DH**

3W • 140Lm

**LED-EM-DH-HO**


6W • 650Lm

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 01.24

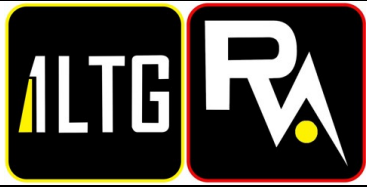

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-DH-HO

Line Item#: 17  
[Go to Bill of Materials](#)


Type: EM

Powered by 4submittal.com


**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Emergency Bug Eyes Square Models

### FEATURES

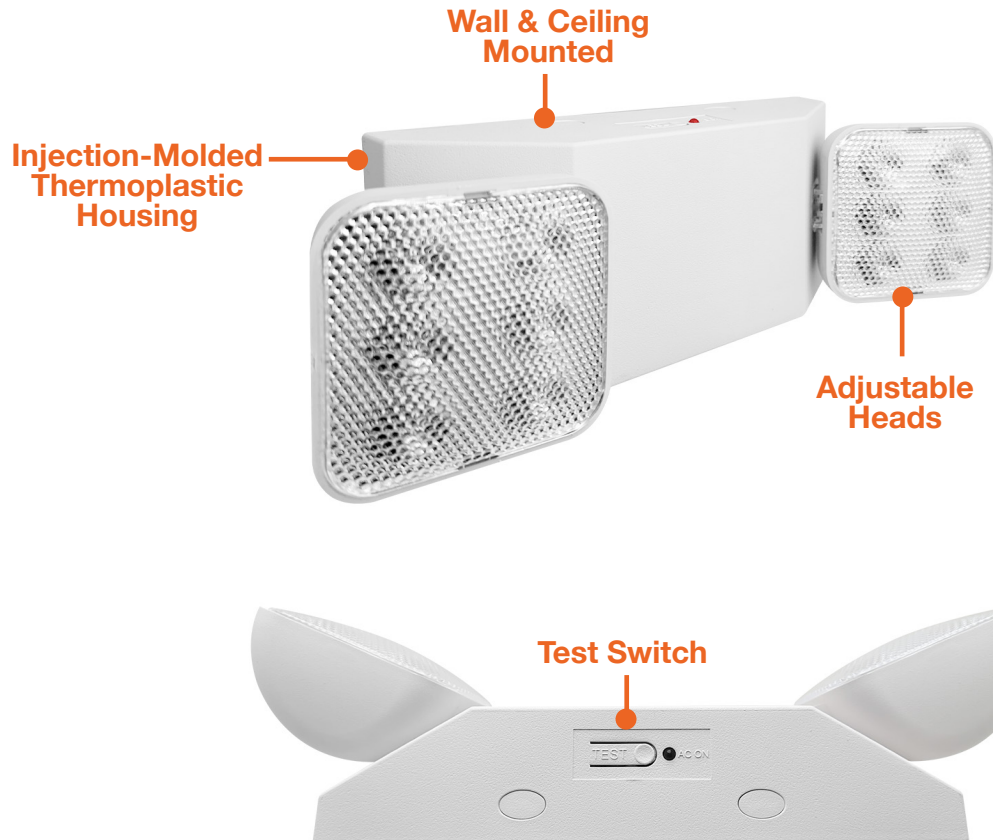


### DIMENSIONS

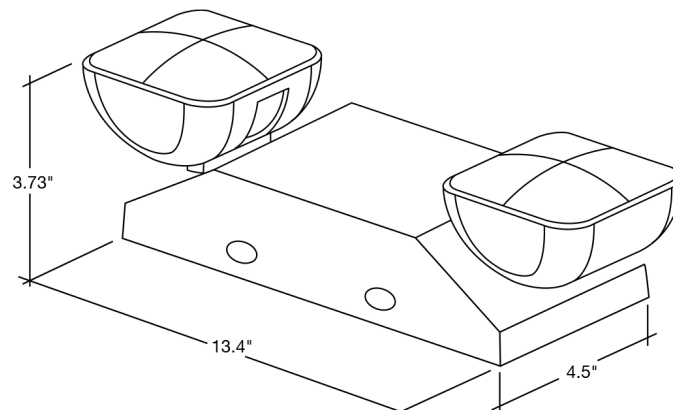

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

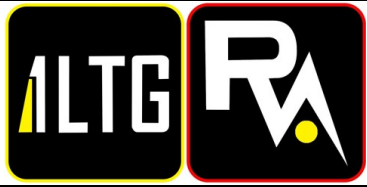

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 18  
[Go to Bill of Materials](#)

Type: SM1

Powered by 4submittal.com




LIGHTING | REINVENTED

plano **ARCH** PRO

## LDLL | Eclipse-II

Product Data Sheet

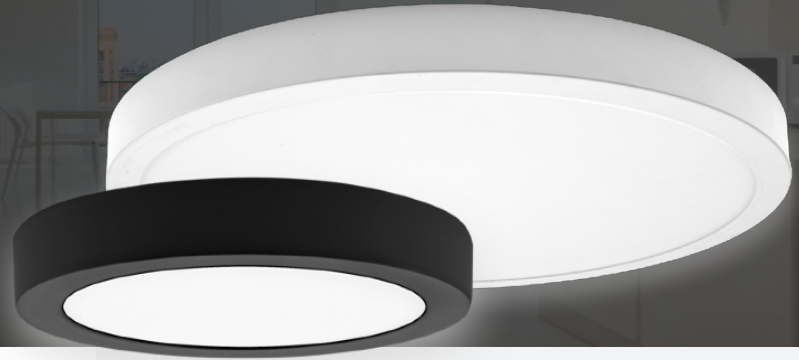

COMMERCIAL-GRADE

### LED Surface Mount Puck Downlight



CCTselect



TruColor Rendering

5" / 7" / 9" / 11" / 13"

#### Product Overview

**INTENDED USE** — The Eclipse-II Series is built for 5-way switchable CCT and is suitable for use in dry, damp, and wet locations, perfect for use in kitchens, hallways, stairways, bathrooms, closets, and just about anywhere you'd need it.

**CONSTRUCTION** — The die-cast aluminum housing is designed for durability and ruggedness.

**INSTALLATION** — Quick-mount aluminum backplate for easy installation.

**WARRANTY** — Featuring a no-compromise 5-year warranty, Energy Star and JA8-compliant, the Eclipse-II is a clean and modern solution for surface mounted driverless design.

ARCHIPELAGO luminaires and LED components undergo rigorous testing by an independent laboratory to meet IESNA LM-79 and LM-80 standards for light output and lumen maintenance. LED color temperature is warranted to shift no more than 180K over the standard warranty period. Correlated Color Temperature (CCT) follows the guidelines set forth in the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

#### Applications



Residential



Hallway



Patio



Entryway

#### Main Features

- Low-Profile Edge-Lit Surface Mount Design
- Durable Di-Cast Aluminum Trim w/ Frosted Lens
- For New Construction or Retrofit Applications
- Suitable for Use in Dry, Damp and Wet Locations
- Suitable for Use in Closets, In Accordance to NEC Guidelines
- Installs on Ceiling and Standard Junction Boxes
- Dimmable to 10% on Compatible TRIAC Dimmers
- 5-Year, 50,000 Hr Warranty
- CEC T24 JA8 Compliant
- NEC Compliant, Suitable for Use in Closet
- Energy Star Certified for 5", 7", 9"

#### Product Warranty\*

5-Year Warranty



50,000 Hrs



\* Standard warranty. Extended warranty available.

Archipelago Lighting, Inc.

| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

[Contact Us](#)







Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W


Line Item#: 18  
[Go to Bill of Materials](#)

Type: SM1

Powered by 4submittal.com



LDLL | Eclipse-II

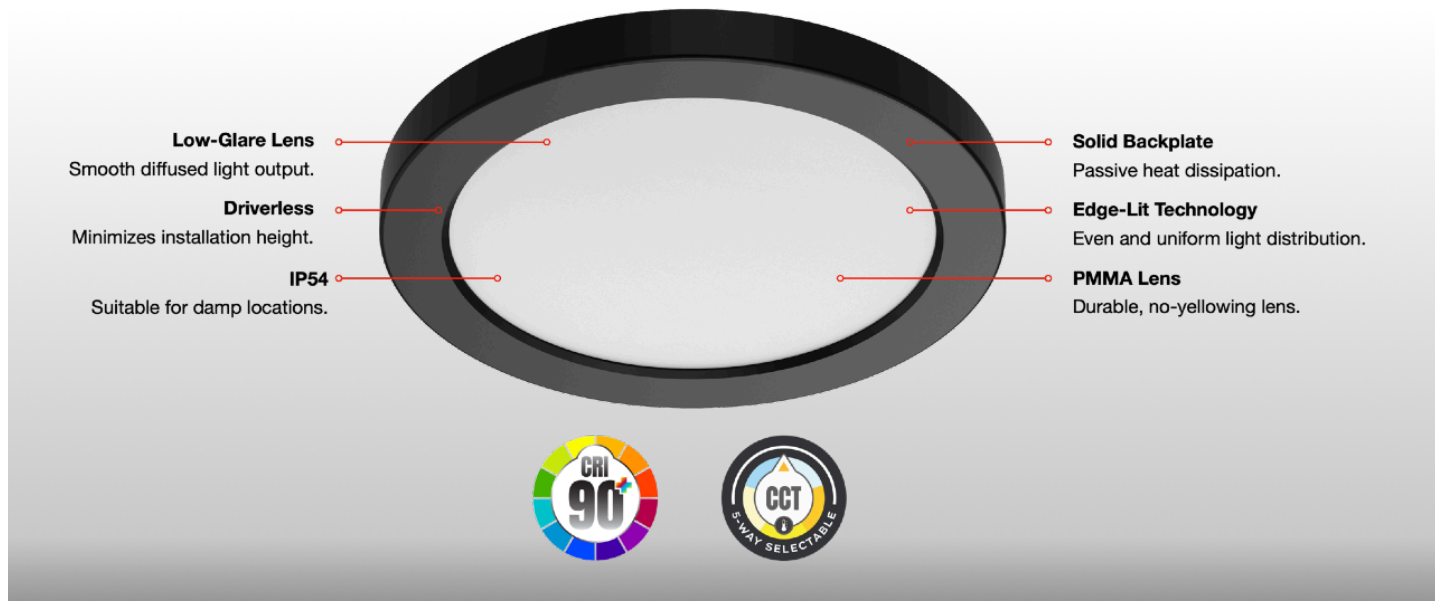

#### Ordering Guide<sup>1</sup>

Model Series	Size (in) / Wattage (W)	Series	CCTselect (K)	Finish Color
<b>LDLL</b> LED Surface Mount Puck Downlight	<b>0510</b> 5inch / 10W <b>0715</b> 7inch / 15W <b>0918</b> 9inch / 18W <b>1121</b> 11inch / 21W <b>1324</b> 13inch / 24W	- <b>E2</b> Eclipse-II	<b>S5</b> 5-CCTselect: 2700K 3000K 3500K 4000K 5000K	/ <b>B</b> Black <b>W</b> White
<b>CATALOG #:</b>				
<b>LDLL</b>		- <b>E2</b>	<b>S5</b>	/

#### Options Guide<sup>2</sup>

EM Driver <sup>3</sup>	Motion Sensor
<input type="checkbox"/> <b>EM15</b> 15W EM Driver <input type="checkbox"/> <b>CRCU</b> 15W EM Driver with Junction Box	<input type="checkbox"/> <b>MSP/W</b> PIR Bi-Level Sensor for 7" and 9" ONLY (White Finish)
<b>OPTIONAL ACCESSORIES #:</b>	

NOTE:

1. Only one selection may be applicable within the same category.
2. Multiple selections may be applicable within the same option category. See Compatible Accessories below for details.
3. EM drivers only work with 7, 9, 11 and 13in fixtures

Archipelago Lighting, Inc.


| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220






	Date: 1/12/2026	Description: LDLL0510-E2S5/W	Line Item#: 18
	Project: FINDLAY FLATS		<a href="#">Go to Bill of Materials</a>
			Type: SM1

Powered by 4submittal.com



LDLL | Eclipse-II

Sizing & Measurements

Model Series	Dimensions	Overall Diameter (in)	Depth (IN)
LDLL0510-E2		5.51	0.79
LDLL0715-E2		7.48	0.82
LDLL0918-E2		8.86	0.79
LDLL1121-E2		10.98	0.98
LDLL1124-E2		12.80	0.98

Recommended Dimmers

Make	Models			
Lutron	TG-600PR-WH S-600PR-WH CTCL-153PDH-WH	TGCL-153PH-LA SLV-600P-AL DV-600PR-WH	SCL-153PH-WH GT-600P DVCL-153P	MSCL-OP153M MACL-153M//MA-R PD-6WCL
Leviton	6672 IPL06	6674	DSL06	RNL06

Accessories (Standard)

Accessories (Optional)



<b>Mounting Bracket</b>	<b>Wire Nuts</b>	<b>Bolts</b>	<b>15W EM Driver</b>	<b>PIR Bi-Level Sensor</b>
Compatible to 2.75" or 3.50" Junction Box			EM15-HMB/170DC CRCU-EM/JBM	LDLL-E2/MSP/W

Archipelago Lighting, Inc.

| Headquarter: 4615 State Street, Montclair, CA 91763


| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220



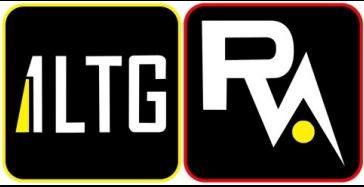

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 18  
[Go to Bill of Materials](#)


Type: SM1


Powered by 4submittal.com



LDLL | Eclipse-II

EM Driver / J-Box (Optional)

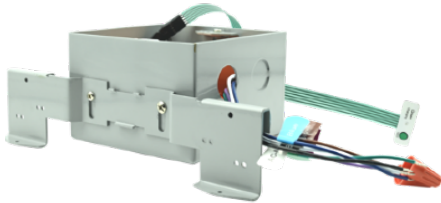

Technical Specification	CRCU-EM/JBM
Emergency Power	15W Max
Installation Method	Recessed
IP Rating	IP20
CEC T.24/JA8 Compliant	Yes
Color Finish	Grey
Physical Features	<ul style="list-style-type: none"><li>Directly connect to AC input</li><li>Fits 2.75" and 3.5" J-Box</li><li>Supports recessed in-ceiling mount</li></ul>
Self-Diagnostic Test Switch	<ol style="list-style-type: none"><li>Emergency conversion kit will go into emergency mode when test switch is pressed while main power is ON.</li><li>Will go into charging mode if test switch is not pressed.</li><li>In emergency mode, pressing the test switch for 3-seconds will inactivate emergency mode.</li></ol>
Indicator Status Light	<ol style="list-style-type: none"><li>Green ON: Charging mode / charging full</li><li>Green OFF: Mains power OFF / discharging mode</li></ol>
Dimension	<p>W4.29in x H2.96</p> 

Archipelago Lighting, Inc.


| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220

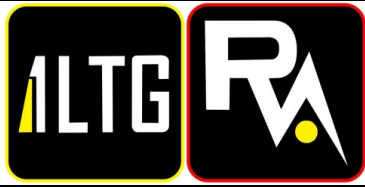

Date: 1/12/2026

Project:  
FINDLAY FLATSDescription:  
LED-CYE-UD-3-3P30-TRI-BL-PCLine Item#: 19  
[Go to Bill of Materials](#)

Type: WM1

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COMProject: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_

Area Lights



## M-Line: 3" Edge-Lit Cylinder Up/Down Light

3-CCT w/ Photocell



WATT	LUMENS
10	1,200
20	2,400
30	3,600

**Detail Specification:**

- Finish: Bronze, Black, White
- IP Rating: Wet Location IP65
- Beam Angle: 60°
- CCT: 30/40/50K Selectable
- Wattage: 30/20/10w
- Lumens: 3,600
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 122° F
- BUG: B2-U2-G2
- Lens: Clear glass with optics
- Average life (L70) of 50,000 hours

**Applications:**

- Dock and Loading
- Walkways & Pathways
- Parking Lots
- Hospitality, Multi-Family
- Outdoor Corridors
- General Outdoor Lighting
- Residential, Commercial and Industrial

**Product Information:**

- Sturdy die-cast aluminum housing finished with corrosion free powder coat
- Photocell included on each fixture. Easy disconnect.
- 1.5' STJW 18.3 AWG cable whip included
- Illuminates up and down and edge
- Select-n-Switch Technology: 3-CCT Selectable + 3-Power Selectable
- Instant-On to full brightness

**Driver Options:**

- UNV: 120-277V 0-10V Dimmable
- Built in 6Kv Surge Protector
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz

**Mounting & Installation:**

- Mounts to 3 or 4" J-box
- Covers a standard 4" recessed j-box

**Certifications:**


- UL Listed for USA and CA
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

**Series****LED-CYE-UD-3-3P30-TRI -**  
3" Up/Down Cylinder • 30/20/10W**Finish****BZ**  
Bronze  
**WH**  
White  
**BL**  
Black**Photocell****- PC**Photocell  
is included.  
Easy quick  
disconnect.  
(PC-3/4-3PIN-LV)

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 10.23

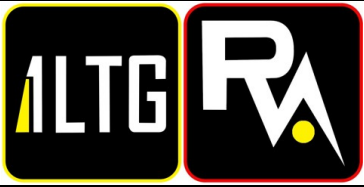

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-CYE-UD-3-3P30-TRI-BL-PC

Line Item#: 19  
[Go to Bill of Materials](#)

Type: WM1

Powered by 4submit.com


**EnVisionLED**<sup>TM</sup>  
WWW.ENVISIONLEDLIGHTING.COM

## M-Line: 3" Edge-Lit Cylinder Up/Down Light 3-CCT w/ Photocell

### FEATURES




### DIMENSIONS

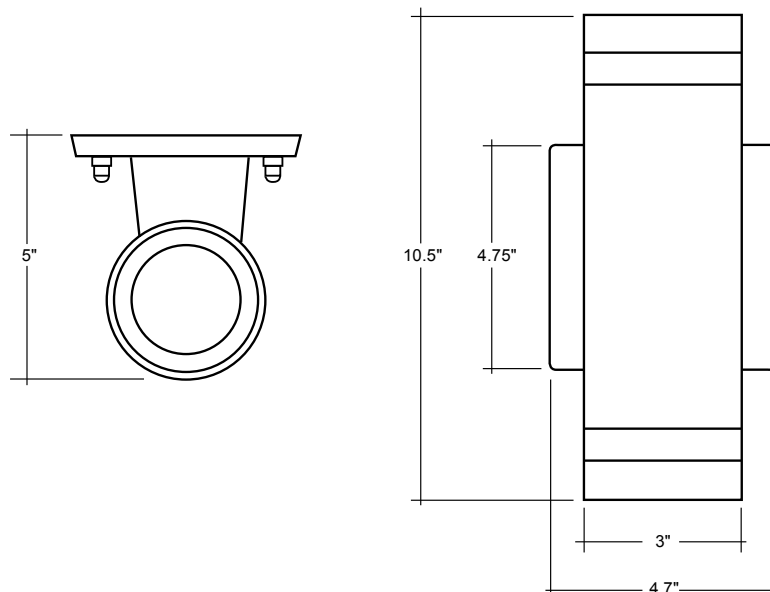

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

	<b>Date:</b> 1/12/2026	<b>Description:</b> SM160116BK	<b>Line Item#:</b> 20 <a href="#">Go to Bill of Materials</a>
	<b>Project:</b> FINDLAY FLATS		<b>Type:</b> WM5
			Powered by 4submital.com


Signlite | SM160116BK
 

Job Name:
 Job Type:
 Quantity:
 Comments:



PRODUCT DESCRIPTION

This classic design was originally used to illuminate signs but now is used as a nostalgic wall washer in residential and commercial applications. The polycarbonate shade is supported by an aluminum arm for maximum durability at a very affordable price.



\*height from center of outlet to the top of the fixture

MEASUREMENTS

DIMENSION	: 7.5" W x 13.75" H x 20.5" Ext
BACK PLATE	: 5" W x 5" H x 2.5" HCO
HANGING WEIGHT	: 1.17 lb
<b>LAMPING</b>	
INPUT VOLTAGE	: 120V
BULB	: 60W Incandescent E26 Medium , 60W Total
BULB INCLUDED	: (Not Included)
DIMMABLE	: Yes
LIGHTING_DIRECTION	: Down

FINISHES OPTION

☒ Black (BK)

MATERIAL

Polycarbonate, Aluminum

RATINGS

cETLus  
Wet Location



ADDITIONAL


INSTALL UP/DOWN: Down  
 OPERATING TEMPERATURE:  
 -20°C (-4°F), 40°C (104°F)

Always consult a qualified electrician before installing any lighting product.

STUDIO•M

Modifications or Customizations: Please email [contract@studiomlighting.com](mailto:contract@studiomlighting.com)  
 Sample Request: Please email [order@studiomlighting.com](mailto:order@studiomlighting.com) with subject line  
 "Sample Order\_ [Project Name] / [Specifier/Designer]"  
 All samples are subject to Studio M approval and must show proof of project and/or explanation.

Job Name:	Job Type:
Quantity:	Comments:

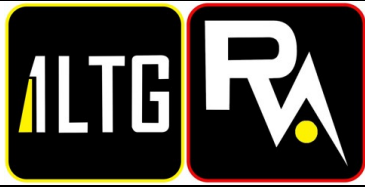

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-FLM-A19-8.5W-30K-D-JA8

Line Item#: 21  
[Go to Bill of Materials](#)


Type: WM5 LAMP

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## A-19 Bulb Filament Series

LED Bulbs

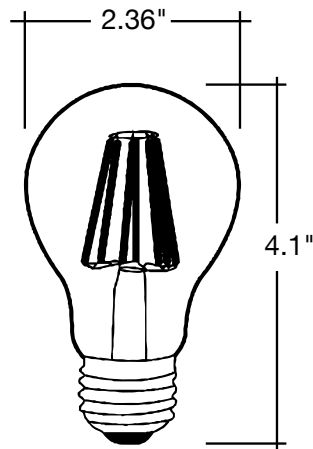

### Detail Specifications

- IP Rating: Damp Location
- Beam Angle: Omni-Directional 360°
- Chip: Filament, R9- 78, CRI >90
- Operating Temperature: -4° - 114° F
- Average life (L70) of 25,000 hours

### Applications:

- Decorative Lighting
- Interior Lighting
- Table & Floor Lamps
- Showcases
- Residential, Multi-Family, Commercial

### Product Information:

- Suitable for use in existing fixtures
- Instant-On to full brightness

### Driver Options:

- 120V
- Triac Dimmable
- PF >0.9, 50/60Hz

### Mounting & Installation:

- E26 Socket
- Direct A Lamp Replacement

### Certifications:

- UL Listed for USA and CA
- Energy Star
- Title 20 and JA8-2022 Approved (8.5W Model Only)
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

### Dimmer List:

Leviton	6674
Lutron	LGCL-153P
Lutron	DVCL-153P
Lutron	CTCL-153P
Lutron	MAELV-300

### Series

**LED-FLM-A19-8.5W-30K-D-JA8**

550 Lumens 60W Equivalent

**LED-FLM-A19-10W-27K**


1,000 Lumens 100W Equivalent

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 10.23

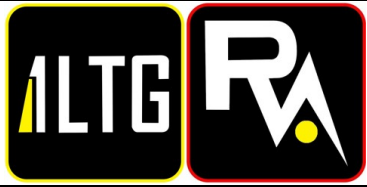

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-RC-1

Line Item#: 22  
[Go to Bill of Materials](#)

Type: RH1

Powered by 4submittal.com



Project: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_



## Single/Double Remote Head

### Product Information:

- Injection-Molded Thermoplastic ABS Housing
- 320 Lumens
- UL-940V-0 Flame Rating
- Wall and Ceiling Mounting
- Input Voltage: 3.6-24 VDC
- Super Bright SMD LED 2.4W
- IP Class: IP65
- Insulation: Class II
- Operating Temperature: 0°F ~ 104° F
- Remote Capable
- Compatible with but Not Limited to  
LED-EM-EXT-G-WH-CMB-RC  
or LED-EM-EXT-R-WH-CMB-R
- 5 Year Limited Warranty




**1 Product**  
LED-EM-RC Remote Head

**2 Head**  
Single 1  
Double 2

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)







Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-RC-1

Line Item#: 22  
[Go to Bill of Materials](#)

Type: RH1

Powered by 4submittal.com


**EnVisionLED™**

## Single/Double Remote Head

### FEATURES



### FEATURES

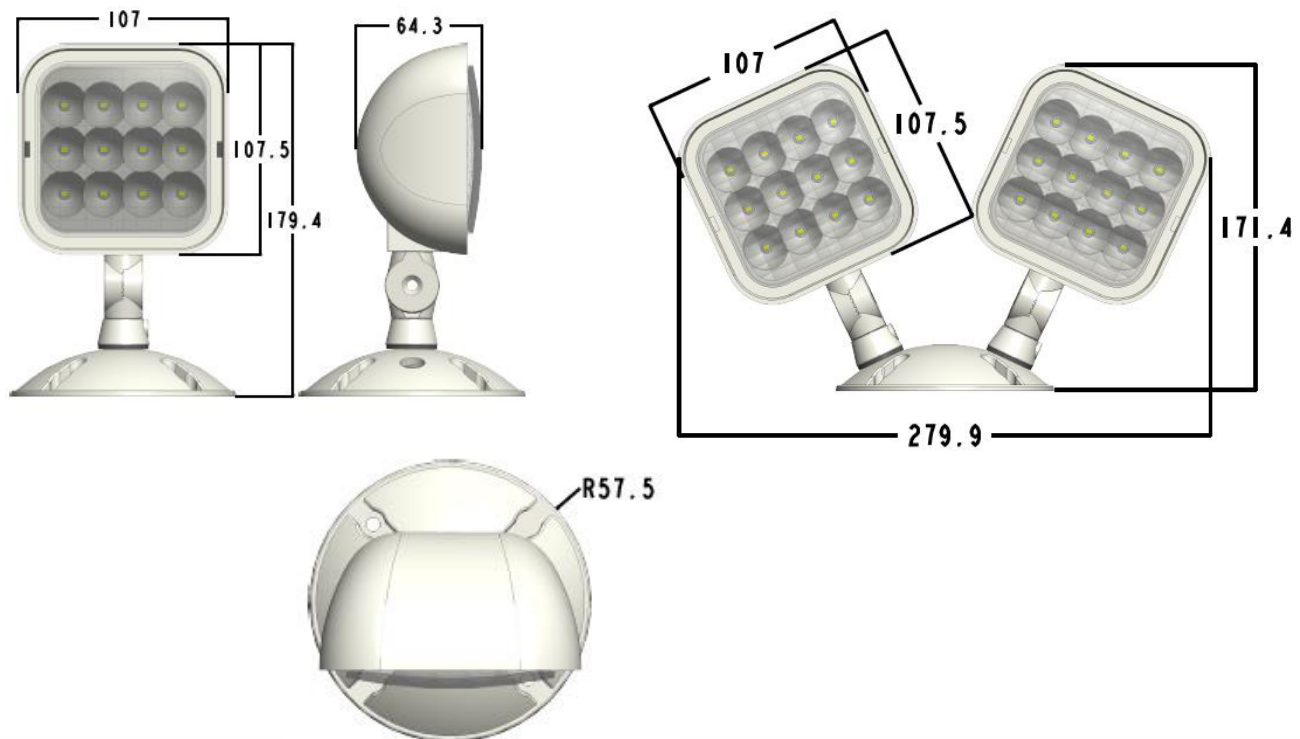

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)





Date: 1/12/2026

Project:  
FINDLAY FLATSDescription:  
LED-BPL-2X2-3M40-5CCTLine Item#: 23  
[Go to Bill of Materials](#)


Type: SM8

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## LED Panels: BackLit Line

### 5-CCT & 3-Power Selectable

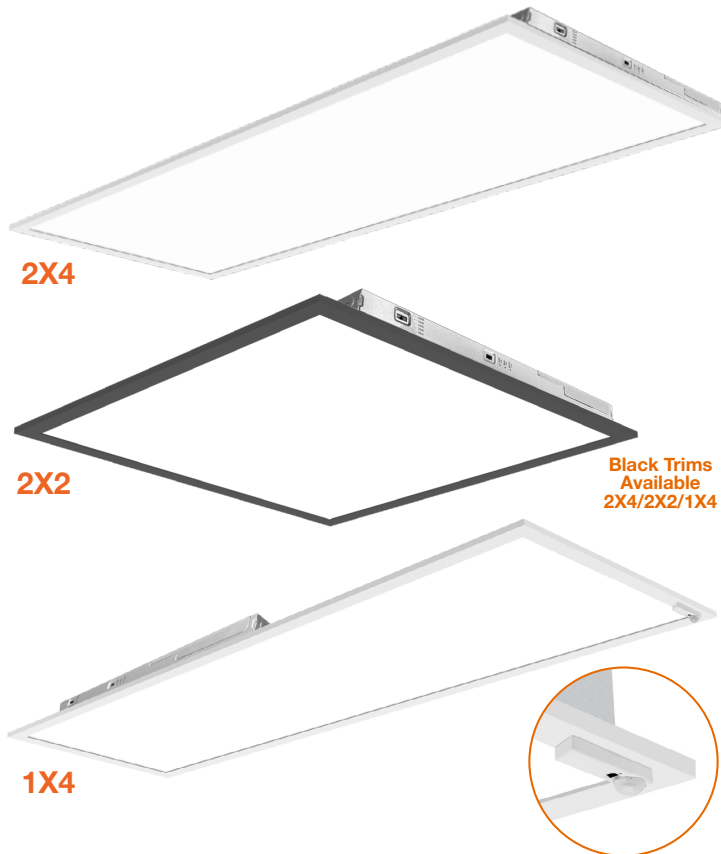Black Trims  
Available  
2X4/2X2/1X4Shown with  
Sensor Option

Regular Versions		HL Versions	
WATT	LUMENS	WATT	LUMENS
20	2,200	30	3,750
30	3,300	40	5,000
40	4,400	45	5,625
50	5,500	50	6,250
		55	6,875
		65	8,125



#### Detail Specifications:

- Finish: White, Custom finishes available
- IP Rating: Damp Location (IP44)
- 5CCT: 30/35/40/50/65K
- Beam Angle: 110°
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 114° F
- Lens: PS (polystyrene) frosted, non-yellowing, & shatter resistant
- Average life (L70) of 50,000 hours
- IC Rated

#### Applications:

- General Indoor Lighting
- Utility & Storage
- Garage Structures
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality
- Commercial and Industrial

#### Product Information:

- Metal housing finished with corrosion free power coat
- Even light distribution
- Lightweight for easier installation
- Select-n-Switch Technology: 5-CCT + 3-Power Selectable
- Control Options:
  - Standard Sensors
  - SILVAIR Bluetooth Mesh
  - ENVISIONLS Bluetooth
  - [Click Here](#) for More Information

#### Driver Options:

- UNV: 120-277V 0-10V Dimmable (Dim to Off)
- Optional 347-480V step down transformer available
- Standard EMB used:
  - 40W: 8W EMB ([LED-EMB-8W-HV-0-10V-2P](#))
  - 50W: 15W EMB ([LED-EMB-15W-HV-0-10V-2P](#))
- Higher wattage emb (up to 25W) available by request. Pricing will vary.
- THD: <15% (+/-5% tolerance), PF >0.9, 50/60Hz
- Isolated Driver
- Flicker Free

#### Mounting & Installations:

- Lay-in ceilings for 5/8" and 3/8" ceiling widths
- Built-in earthquake clips
- Optional 9' suspension kit available
- Optional surface mount, drywall kit available
- Use surface mount and suspension kit for an aesthetically pleasing design

#### Certifications:

- ETL Listed for USA and CA
- DLC Listed/ DLC Premium Listed (HL Versions)
  - View DLC ID Chart below
- NSF Rated
- Approved for CA T24
- 5 Year Limited Warranty

Series	Sensor	Emergency	Driver <sup>1</sup>	Whip
LED-BPL-2X2-3M40-5CCT	(blank)	(blank)	(blank)	(blank)
20/30/40W	No Sensor	No	120-277V	No Whip
LED-BPL-2X2-3M50-5CCT-HL	SR	Emergency	HV	-6FLX
30/40/50W	Sensor Ready	Emergency	347-480V	6' Flex
LED-BPL-2X4-3M50-5CCT	(See sensor options)	Backup	Stepdown	
30/40/50W				
LED-BPL-2X4-3M65-5CCT-HL				
45/55/65W				
LED-BPL-1X4-3M40-5CCT				
20/30/40W				

1. HV: High voltage is made to order.

#### Optional Accessories (Order Separately)

Sensors	Suspension Kits	Surface Mount Kits	Drywall Kits	Color Trims
<b>S-AUD-PIR-1</b>	<b>SK-10FT-Y-LC-CB</b>	<b>2X2-SM-3"</b>	<b>LED-PNL-2X2-FLNG</b>	<b>BPL-2X2-TRIM-BL</b>
PIR Bi-Level	10' Suspension Kit	3" Height		
Motion + Daylight	<b>SK-20FT-Y-LC-CB</b>	<b>2X4-SM-3"</b>	<b>LED-PNL-2X4-FLNG</b>	<b>2x2 Black Trim</b>
Sensor Remote	20' Suspension Kit	3" Height		
Required:	<b>CK-6FT-V</b>	<b>1X4-SM-3"</b>	<b>LED-PNL-1X4-FLNG</b>	<b>2x4 Black Trim</b>
(S-LINE-R)	6' Chain Hanging Kit	3" Height		<b>BPL-1X4-TRIM-BL</b>
<b>S-AUD-PIR-BT</b>				<b>1x4 Black Trim</b>
PIR ENVISIONLS				
Bluetooth Control				
<b>S-AUD-PIR-SL</b>				
PIR SILVAIR				
Bluetooth Mesh				

1. Custom height options available. Contact us.

Specs and model numbers are subject to change with or without notice. Customization of product is available.

**EnVision LED Lighting, Inc.**6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 12.24





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-BPL-2X2-3M40-5CCT

Line Item#: 23  
[Go to Bill of Materials](#)

Type: SM8


Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM


## LED Panels: BackLit Line

5-CCT & 3-Power Selectable

### FEATURES

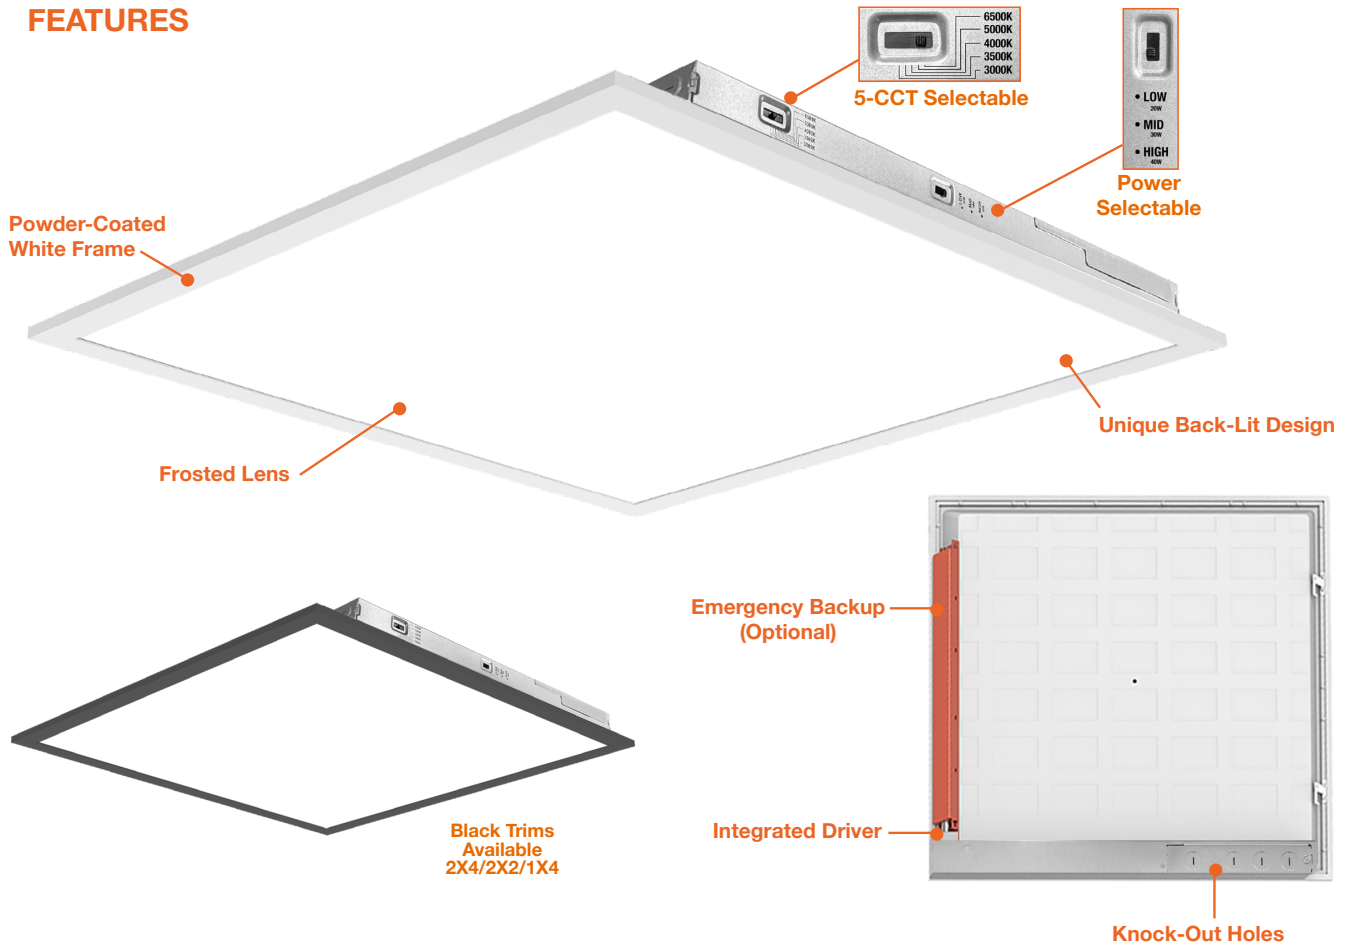

### DIMENSIONS

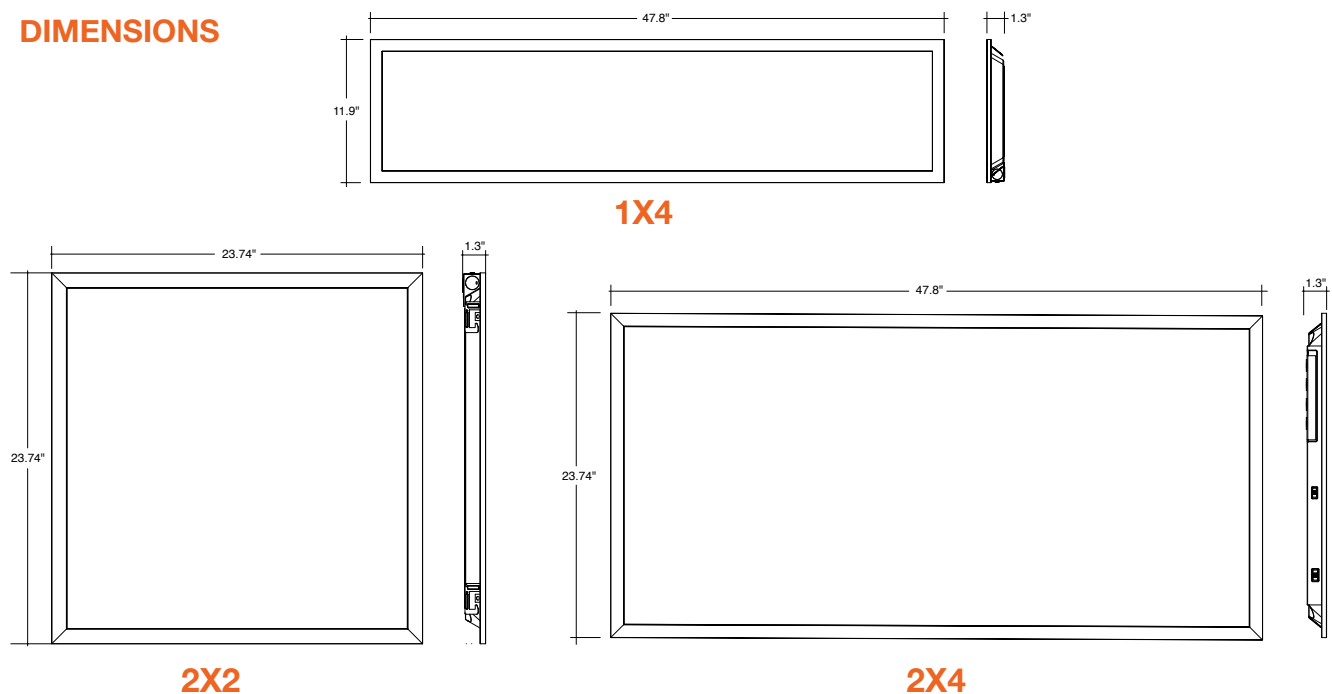



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-BPL-2X2-3M40-5CCT

Line Item#: 23  
[Go to Bill of Materials](#)

Type: SM8

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## LED Panels: BackLit Line 5-CCT & 3-Power Selectable

### ACCESSORIES




SK-10FT-Y-LC-CB  
SK-20FT-Y-LC-CB



CK-6FT-V




S-AUD-PIR-1  
S-AUD-PIR-BT  
S-AUD-PIR-SL

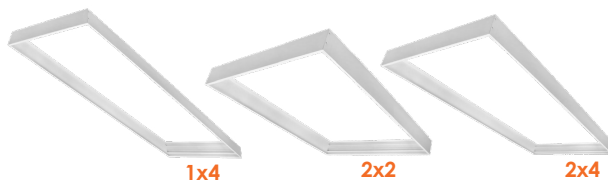

1x4

2x2


2x4

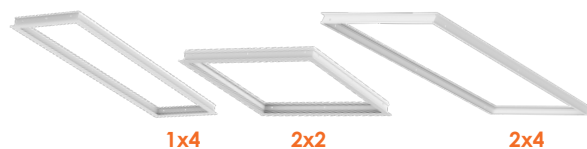

1x4

2x2

2x4



2x2



1x4



2x4

Model	Voltage	Watts	Lumens	Color	CRI
LED-BPL-2X2-3M40-5CCT	120/277V	20/30/40w	2600/3900/4400	30/35/40/50/65k	>80
LED-BPL-2X2-3M50-5CCT-HL	120/277V	30/40/50w	3900/4400/5500	30/35/40/50/65k	>80
LED-BPL-2X4-3M50-5CCT	120/277V	30/40/50w	3900/4400/5500	30/35/40/50/65k	>80
LED-BPL-2X4-3M65-5CCT-HL	120/277V	45/55/65w	5625/6875/8125	30/35/40/50/65k	>80
LED-BPL-1X4-3M40-5CCT	120/277V	20/30/40w	2600/3900/4400	30/35/40/50/65k	>80

### SUSPENSION KITS

Accessory	Description
SK-10FT-Y-LC-CB	10' Suspension Kit
SK-20FT-Y-LC-CB	20' Suspension Kit
CK-6FT-V	6' Chain Hanging Kit
LED-PNL-2X4-SK	3.5' Suspension Kit, works for all sizes

### SENSORS

Accessory Model	Description
S-AUD-PIR-1	PIR Bi-Level Motion + Daylight Sensor Remote Required: (S-LINE-R)
S-AUD-PIR-BT	PIR ENVISIONLS Bluetooth Control
S-AUD-PIR-SL	PIR SILVAIR Bluetooth Mesh

### SURFACE MOUNT KITS

Accessory	Description
2X2-SM-3"	2X2 Surface Mount Kit 3" Height for all Panels and Troffers
2X4-SM-3"	2X4 Surface Mount Kit 3" Height for all Panels and Troffers
1x4-SM-3"	1X4 Surface Mount Kit 3" Height for all Panels and Troffers

### DRYWALL KITS

Accessory	Description
LED-PNL-2X2-FLNG	Flange (Drywall) Kit for Panels for all 2X2 Fixtures
LED-PNL-2X4-FLNG	Flange (Drywall) Kit for Panels for all 2X4 Fixtures
LED-PNL-1X4-FLNG	Flange (Drywall) Kit for Panels for all 1X4 Fixtures

### TRIMS


Accessory	Description
BPL-2X2-TRIM-BL	2x2 LED Panel: Backlit-Line Black Trim
BPL-1X4-TRIM-BL	1x4 LED Panel: Backlit-Line Black Trim
BPL-2X4-TRIM-BL	2x4 LED Panel: Backlit-Line Black Trim

Luminaires for Ambient Lighting of - DLC Product ID:

LED-BPL-2x2-3M40-5CCT	S-IMBE52 (Standard)
LED-BPL-2x4-3M50-5CC	S-U0267J (Standard)
LED-BPL-1x4-3M40-5CCT	S-DR8V2E (Standard)
LED-BPL-2x2-3M50-5CCT-HL	S-V26054 (Standard)
LED-BPL-2x4-3M65-5CCT-HL	S-WNV8KG (Premium)

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

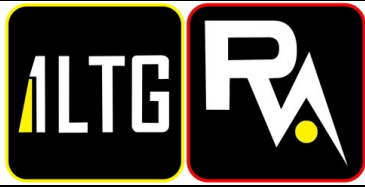

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-BPL-2X2-3M40-5CCT









Line Item#: 23  
[Go to Bill of Materials](#)

Type: SM8


Powered by 4submittal.com

## EnVisionLED™ Control Options

EnVision LED offers 3 control systems compatible with our LED Fixtures for projects of all sizes and budgets.

	Basic Controls	EnVisionLS 	EnVisionLED™ x SILVAIR 
<b>Description</b>	Standard Plug In Sensors	Basic Bluetooth Wireless Control	Advanced Bluetooth Wireless Control
<b>Recommended Quantity</b> (but not limited to)	N/A	>40-50 Nodes	>50 Nodes
<b>Maximum Zone Quantity</b>	N/A	100	3,000
<b>Commissioning Tool</b>	Remote Only	  ENVISIONLS App 	  SILVAIR App 
<b>Commissioning Process</b>	Individually Set via Remote	Wireless Must be done on site	Wireless- Initial linking must be done on site. Commissioning can be done via desktop remotely.
<b>Floor Plan Upload</b>	N/A	N/A	Yes Add a floor plan and mark luminaires & zones via desktop
<b>Gateway</b>	N/A	N/A	Required only for energy monitoring, advanced scheduling, automated demand response.
<b>Individual Luminaire Control</b>	Yes	Yes	Yes
<b>Luminaire Grouping Zoning</b>	N/A	Yes	Yes
<b>High End Power Low End Power</b>	Yes but limited (View Remote)	Yes	Yes
<b>Cost</b>	\$	\$\$	\$\$\$
<b>DLC NLC Listed</b>	N/A	Yes	Yes
<b>Energy Monitoring &amp; Data Reporting</b>	N/A	N/A	Monitor energy usage per individual zone & retrofit cost savings calculation + detailed reporting



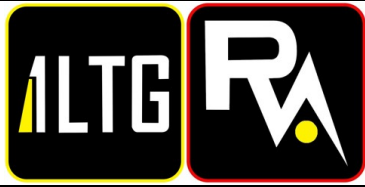

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-BPL-2X2-3M40-5CCT

Line Item#: 23  
[Go to Bill of Materials](#)

Type: SM8

Powered by 4submittal.com





## Compatible Products:

EnVision offers a variety of nodes, sensors, & gateways that are controlled via remote, ENVISIONLS Bluetooth Mesh & SILVAIR Bluetooth Mesh on all of our 0-10V dimmable fixtures.






### Individual Fixture Controls: PIR Sensor, Bi-Level Dimming, Daylight


Basic Note: -1 • ENVISIONLS Models Note: -BT • SILVAIR Models Note: -SL


	MODEL #	DESIGN	RECOMMENDED FIXTURE	FEATURES
	S-TWC-PIR-1 S-TWC-PIR-BT S-TWC-PIR-SL	Twist-C Control Sensor	Sensor Ready Fixtures: Area Lights, Canopies, Flood Lights, High Bays	All models are equipped with PIR occupancy sensing, high & low end bi-level dimming, & daylight sensing.
	S-TWC-90 + S-TWC-PIR-1 S-TWC-90 + S-TWC-PIR-BT S-TWC-90 + S-TWC-PIR-SL	Twist-C Control Sensor + 90 Degree Arm	Cylinders, Strips, Wall Packs	
	S-AUD-PIR-1 S-AUD-PIR-BT S-AUD-PIR-SL	2.5m Audio Jack	Panels & Troffers	
	S-SN-PIR-1 S-SN-PIR-BT S-SN-PIR-SL	Snap In Sensor	Troffers & Wraps	

### Group Controls ENVISIONLS Models Note : -BT • SILVAIR Models Note: -SL

	MODEL #	DESIGN	VOLTAGE	FEATURES	RECOMMENDED FEATURES
	S-CM-PIR-LV-BT S-CM-PIR-LV-SL	Ceiling Mounted PIR Sensor	12-24V	PIR Sensor, Bi-Level Dimming, Daylight, 360° detection, 12' Max Mounting Height	Connects to 0-10V dimmable fixtures
	S-WM-PIR-CUNV-BT S-WM-PIR-CUNV-SL	Wall Mounted PIR Occupancy Sensor, Bi-Level Dimming, Daylight	120-277V	On/Off PIR occupancy sensor, 180° detection, 30' detection @ 4' Mounting Height	Connects to LED fixtures
	S-WS-120V-USB-SL		120V	Dimming Wall Socket, Two Sockets	Floor Lamps, Other Lamps

### Gateway (Silvaire Only) 4.5–5.5 V DC, 2A Power over Ethernet 36–57 V DC

	MODEL #	DESIGN	VOLTAGE	FEATURES	RECOMMENDED FEATURES
	SGW-102	Wall or Ceiling Mounted	POE	Advanced Energy Monitoring Control	Connects to Silvaire Controls. Gateway is not required.

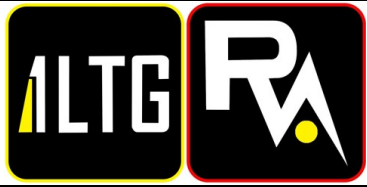

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 24  
[Go to Bill of Materials](#)

Type: SM3

Powered by 4submittal.com




LIGHTING | REINVENTED

plano **ARCH** PRO

## LDLL | Eclipse-II

Product Data Sheet

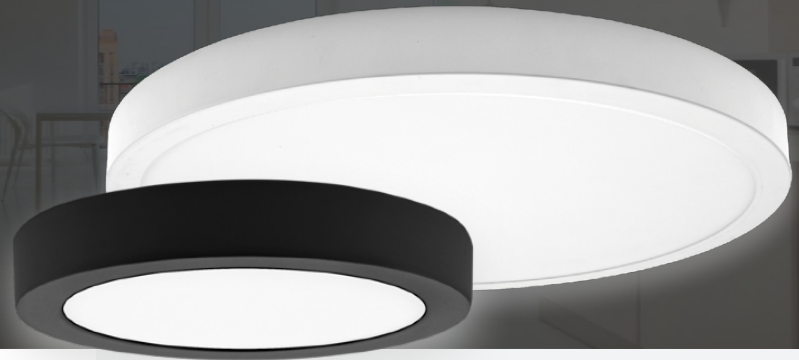

COMMERCIAL-GRADE

### LED Surface Mount Puck Downlight



CCTselect



TruColor Rendering

5" / 7" / 9" / 11" / 13"

#### Product Overview

**INTENDED USE** — The Eclipse-II Series is built for 5-way switchable CCT and is suitable for use in dry, damp, and wet locations, perfect for use in kitchens, hallways, stairways, bathrooms, closets, and just about anywhere you'd need it.

**CONSTRUCTION** — The die-cast aluminum housing is designed for durability and ruggedness.

**INSTALLATION** — Quick-mount aluminum backplate for easy installation.

**WARRANTY** — Featuring a no-compromise 5-year warranty, Energy Star and JA8-compliant, the Eclipse-II is a clean and modern solution for surface mounted driverless design.

ARCHIPELAGO luminaires and LED components undergo rigorous testing by an independent laboratory to meet IESNA LM-79 and LM-80 standards for light output and lumen maintenance. LED color temperature is warranted to shift no more than 180K over the standard warranty period. Correlated Color Temperature (CCT) follows the guidelines set forth in the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

#### Applications



Residential



Hallway



Patio



Entryway

#### Main Features

- Low-Profile Edge-Lit Surface Mount Design
- Durable Di-Cast Aluminum Trim w/ Frosted Lens
- For New Construction or Retrofit Applications
- Suitable for Use in Dry, Damp and Wet Locations
- Suitable for Use in Closets, In Accordance to NEC Guidelines
- Installs on Ceiling and Standard Junction Boxes
- Dimmable to 10% on Compatible TRIAC Dimmers
- 5-Year, 50,000 Hr Warranty
- CEC T24 JA8 Compliant
- NEC Compliant, Suitable for Use in Closet
- Energy Star Certified for 5", 7", 9"

#### Product Warranty\*

5-Year Warranty



50,000 Hrs



\* Standard warranty. Extended warranty available.

Archipelago Lighting, Inc.

| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

[Contact Us](#)







Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W


Line Item#: 24  
[Go to Bill of Materials](#)

Type: SM3

Powered by 4submittal.com



LDLL | Eclipse-II

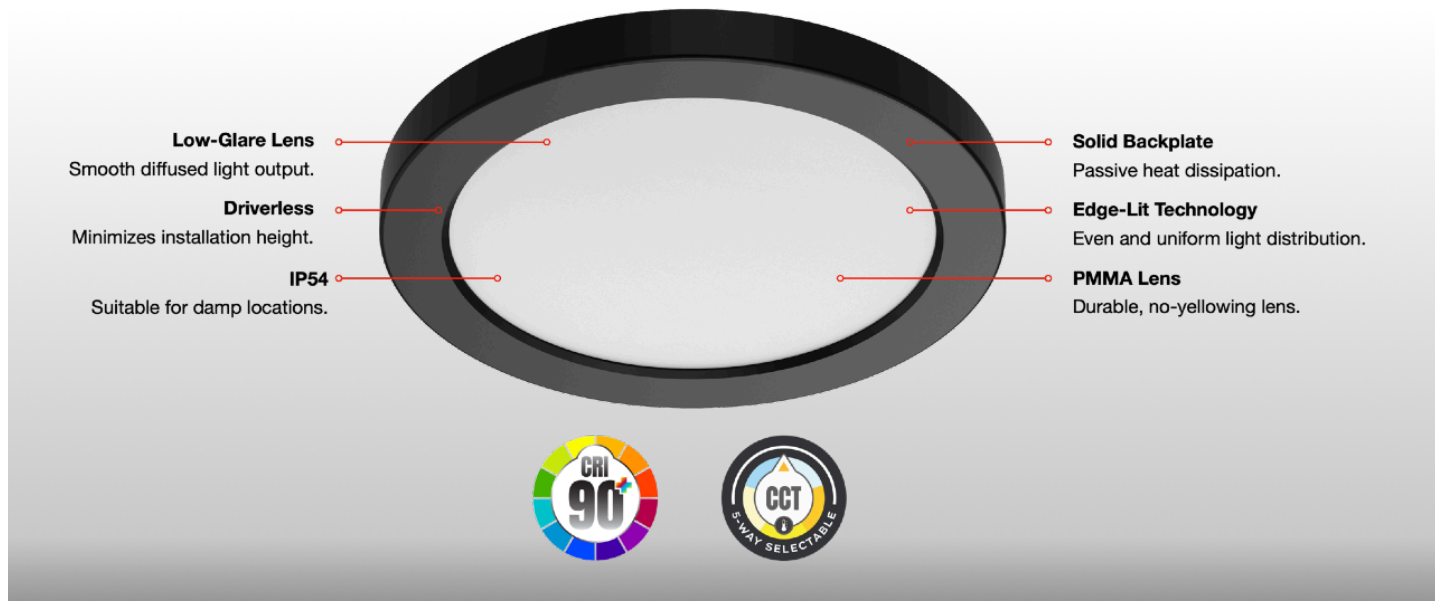

#### Ordering Guide<sup>1</sup>

Model Series	Size (in) / Wattage (W)	Series	CCTselect (K)	Finish Color
<b>LDLL</b> LED Surface Mount Puck Downlight	<b>0510</b> 5inch / 10W <b>0715</b> 7inch / 15W <b>0918</b> 9inch / 18W <b>1121</b> 11inch / 21W <b>1324</b> 13inch / 24W	- <b>E2</b> Eclipse-II	<b>S5</b> 5-CCTselect: 2700K 3000K 3500K 4000K 5000K	/ <b>B</b> Black <b>W</b> White
<b>CATALOG #:</b>				
<b>LDLL</b>		- <b>E2</b>	<b>S5</b>	/

#### Options Guide<sup>2</sup>

EM Driver <sup>3</sup>	Motion Sensor
<input type="checkbox"/> <b>EM15</b> 15W EM Driver <input type="checkbox"/> <b>CRCU</b> 15W EM Driver with Junction Box	<input type="checkbox"/> <b>MSP/W</b> PIR Bi-Level Sensor for 7" and 9" ONLY (White Finish)
<b>OPTIONAL ACCESSORIES #:</b>	

NOTE:

- Only one selection may be applicable within the same category.
- Multiple selections may be applicable within the same option category. See Compatible Accessories below for details.
- EM drivers only work with 7, 9, 11 and 13in fixtures

Archipelago Lighting, Inc.

| Headquarter: 4615 State Street, Montclair, CA 91763


| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220








	Date: 1/12/2026	Description: LDLL0510-E2S5/W	Line Item#: 24
	Project: FINDLAY FLATS		<a href="#">Go to Bill of Materials</a>
			Type: SM3
Powered by 4submittal.com			



LDLL | Eclipse-II

Sizing & Measurements


Model Series	Dimensions	Overall Diameter (in)	Depth (IN)
LDLL0510-E2		5.51	0.79
LDLL0715-E2		7.48	0.82
LDLL0918-E2		8.86	0.79
LDLL1121-E2		10.98	0.98
LDLL1124-E2		12.80	0.98

Recommended Dimmers

Make	Models			
Lutron	TG-600PR-WH S-600PR-WH CTCL-153PDH-WH	TGCL-153PH-LA SLV-600P-AL DV-600PR-WH	SCL-153PH-WH GT-600P DVCL-153P	MSCL-OP153M MACL-153M//MA-R PD-6WCL
Leviton	6672 IPL06	6674	DSL06	RNL06

Accessories (Standard)

Accessories (Optional)



<b>Mounting Bracket</b>	<b>Wire Nuts</b>	<b>Bolts</b>	<b>15W EM Driver</b>	<b>PIR Bi-Level Sensor</b>
Compatible to 2.75" or 3.50" Junction Box			EM15-HMB/170DC CRCU-EM/JBM	LDLL-E2/MSP/W

Archipelago Lighting, Inc.

| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 24  
[Go to Bill of Materials](#)


Type: SM3

Powered by 4submittal.com



LDLL | Eclipse-II

EM Driver / J-Box (Optional)

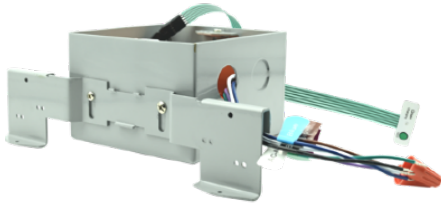

Technical Specification	CRCU-EM/JBM
Emergency Power	15W Max
Installation Method	Recessed
IP Rating	IP20
CEC T.24/JA8 Compliant	Yes
Color Finish	Grey
Physical Features	<ul style="list-style-type: none"><li>Directly connect to AC input</li><li>Fits 2.75" and 3.5" J-Box</li><li>Supports recessed in-ceiling mount</li></ul>
Self-Diagnostic Test Switch	<ol style="list-style-type: none"><li>Emergency conversion kit will go into emergency mode when test switch is pressed while main power is ON.</li><li>Will go into charging mode if test switch is not pressed.</li><li>In emergency mode, pressing the test switch for 3-seconds will inactivate emergency mode.</li></ol>
Indicator Status Light	<ol style="list-style-type: none"><li>Green ON: Charging mode / charging full</li><li>Green OFF: Mains power OFF / discharging mode</li></ol>
Dimension	<p>W4.29in x H2.96</p>

Archipelago Lighting, Inc.


| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220

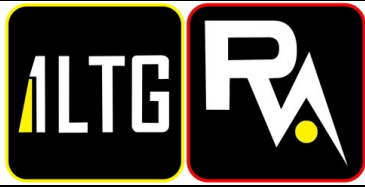

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-VT-ADJ-24-21W-5CCT-BN

Line Item#: 25  
[Go to Bill of Materials](#)

Type: V1

Powered by 4submittal.com


**EnVisionLED**<sup>TM</sup>  
WWW.ENVISIONLEDLIGHTING.COM

## Vanity Fixtures

### Square Adjustable Swivel



-BL

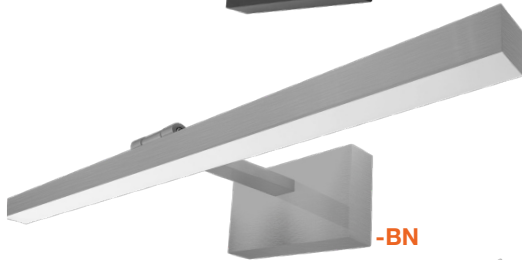

-BN



-CH



FRONT VIEW



90° Rotatable Angle

Vanity Fixture



#### Detail Specifications:

- Power: 21W
- Lumens: 2,700
- Finishes: Black, Brushed Nickel, Chrome
- IP Rating: IP54 Damp Location
- Beam Angle: 100°
- Chip: SMD 2835, R9 >50, CRI >90
- Operating Temperature: -40° - 114° F
- Lens: Frosted Acrylic, non-yellowing
- Average life (L70) of 50,000 hours

#### Applications:

- Bathrooms & Lavatories
- Hallways & Corridors
- Artwork, Museums
- Residential & Multifamily
- Education, Healthcare, Retail, Hospitality

#### Product Information:

- Available in 23.6" length
- Adjustable Angle: Lens swivels up and down
- Wide j-box for easier installation in retrofit and new construction applications
- Select-n-Switch Technology: 5-CCT Selectable

#### Driver Options:

- Triac & ELV dimmable down to 5%
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz
- Built in 2.5Kv Surge Protector
- Flicker Free

#### Mounting & Installations:

- 30/40 Junction Box
- Surface mount bracket included

#### Certifications:

- ETL Listed for USA and CA
- CA Title 24 JA8-2022 CEC Listed
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

#### Series

LED-VT-ADJ-24-21W-5CCT-BL

Black

LED-VT-ADJ-24-21W-5CCT-BN

Brushed Nickel

LED-VT-ADJ-24-21W-5CCT-CH


Chrome

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 04.25

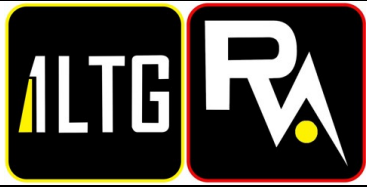

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-VT-ADJ-24-21W-5CCT-BN

Line Item#: 25  
[Go to Bill of Materials](#)

Type: V1

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM


## Vanity Fixtures

### Square Adjustable Swivel

#### FEATURES




90° Rotatable Angle



5-CCT Selectable

#### MEASUREMENTS

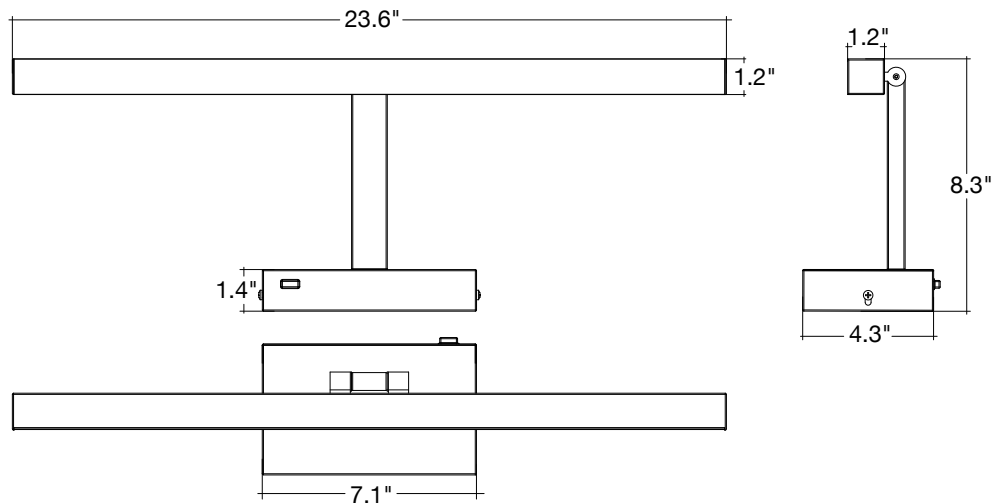

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
TS3-8FT-SM-WH

Line Item#: 26  
Go to Bill of Materials


Type: TL1

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## Linear Track & Accessories

### 3-Wire Single Circuit



	LENGTH	WIDTH	HEIGHT
TS3-2FT-SM 2' Nominal	24"	1 3/8"	1 1/16"
TS3-4FT-SM 4' Nominal	48"	1 3/8"	1 1/16"
TS3-8FT-SM 8' Nominal	96"	1 3/8"	1 1/16"



#### Item

##### TS3-2FT-SM-WH

White

##### TS3-2FT-SM-BL

Black

##### TS3-4FT-SM-WH

White

##### TS3-4FT-SM-BL

Black

##### TS3-8FT-SM-WH

White

##### TS3-8FT-SM-BL

Black

#### Accessories

##### TS3-SM-LIVE-WH

Live End: Required to start a run

##### TS3-SM-LIVE-BL

Live End: Required to start a run

##### TS3-SM-END-WH

End Cap: Required to end a run

##### TS3-SM-END-BL

End Cap: Required to end a run

##### TS3-SM-MJ-WH

Mini Joiner: Low profile joiner

for two straight track sections

##### TS3-SM-MJ-BL

Mini Joiner: Low profile joiner

for two straight track sections

##### TS3-SM-SC-WH

Straight Connector: Connect two track sections end to end with a center feed option

##### TS3-SM-SC-BL

Straight Connector: Connect two track sections end to end with a center feed option

##### TS3-SM-L-WH

L-Connector: Connect two track sections at a right angle

##### TS3-SM-L-BL

L-Connector: Connect two track sections at a right angle

Project: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_

#### Track Lights



#### Detail Specifications:

- Finish: White, Black
- Dry Location Rated
- 3-Wire
- Single Circuit
- Voltage: 120V

#### Applications:

- General Track Lighting
- Residential & Multifamily
- Art Galleries, Museums
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality

#### Product Information:

- End cap included with each track
- Extruded aluminum housing
- Solid copper conductor
- Interchangeable beam angles
- Multiple accessories available

#### Mounting & Installations:

- Compatible with H-Type single circuit track system
- Surface Mount Use

#### Certifications:


- ETL Listed for USA and CA

Specs and model numbers are subject to change with or without notice. Customization of product is available.

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | www.envisionledlighting.com

Rev. 10.23

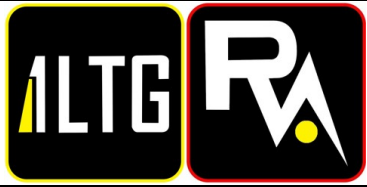

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
TS3-8FT-SM-WH

Line Item#: 26  
[Go to Bill of Materials](#)

Type: TL1

Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Linear Track & Accessories

### 3-Wire Single Circuit

#### TRACK ACCESSORIES



**TS3-SM-LIVE-WH**  
**TS3-SM-LIVE-BL**

Live End: Required to start a run



**TS3-SM-END-WH**  
**TS3-SM-END-BL**

End Cap: Required to end a run



**TS3-SM-MJ-WH**  
**TS3-SM-MJ-BL**

Mini Joiner: Low profile joiner for two straight track sections



**TS3-SM-SC-WH**  
**TS3-SM-SC-BL**

Straight Connector: Connect two track sections end to end with a center



**TS3-SM-L-WH**  
**TS3-SM-L-BL**

L-Connector: Connect two track sections at a right angle



**TS3-SM-T-WH**  
**TS3-SM-T-BL**

T-Connector: Connect two track sections at a T angle



**TS3-SM-X-WH**  
**TS3-SM-X-BL**

X-Connector: Connect two track sections at an cross angle




**TS3-SM-FLX-WH**  
**TS3-SM-FLX-BL**

Flexible Connector: Connect two track sections at any angle up to 90°



**TS3-SM-FC-WH**  
**TS3-SM-FC-BL**

Floating Canopy: Track can be connected to existing outlet box along the track.

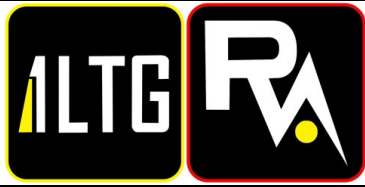

Date: 1/12/2026

Project:  
FINDLAY FLATSDescription:  
LED-ATH-10W-5CCT-30D-WHLine Item#: 27  
[Go to Bill of Materials](#)Type: TRACK  
HEAD

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## ARCY-Line: Track Heads

### COB 5-CCT Selectable



#### Track Lights



#### Detail Specifications:

- Finish: White, Black
- Damp Location Rated
- Chip: High Lumen COB, R9 >50, CRI >90
- 2 Step MacAdam Ellipses
- Operating Temperature: -40° - 114° F
- Lens: PMMA Clear Lens
- Average life (L70) of 50,000 hours

#### Applications:

- General Track Lighting
- Residential & Multifamily
- Art Galleries, Museums
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality

#### Product Information:

- Metal housing and trim for better heat dissipation
- 350° Horizontal Rotation, 90° Vertical Rotation
- Interchangeable beam angles
- For use with H-Type track or surface mount installation
- Select-n-Switch Technology: 5-CCT
- Instant-On to full brightness

#### Driver Options:

- Voltage: 120V
- Triac Dimmable Down to 5%
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz
- Built in 2.5Kv Surge Protector
- Flicker Free

#### Mounting & Installation:

- Compatible with H-Type single circuit track system
- Surface mount accessory option available for 3/40 J-Box

#### Certifications:

- ETL Listed for USA and CA
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017
- IC Rated and ASTM-E283 Air-Tight
- Complies with UL 263, ASTM E119, CAN ULC S101

Series	Beam Angles	Finish	Mounting
LED-ATH-10W-5CCT 10W • 1,000lm	30D <sup>1</sup> 30°	WH White	(Blank) H-Type Track
LED-ATH-20W-5CCT 20W • 2,000lm	36D <sup>1</sup> 36°	BLK Black	SM Surface Mount
LED-ATH-30W-5CCT 30W • 3,000lm	24D 24° 60D 60°		
<sup>1</sup> . • 30D standard on 10W. • 36D standard on 20W & 30W. • 24D & 60D available for all sizes			

#### Optional Accessories (Order Separately)

Optic Lens	Surface Mount	Emergency Backup <sup>1</sup> (field install)
ATH-10W-24D 24° Beam Angle ATH-10W-60D 60° Beam Angle ATH-20W-24D 24° Beam Angle ATH-20W-60D 60° Beam Angle ATH-30W-24D 24° Beam Angle ATH-30W-60D 60° Beam Angle	ATH-SM Surface Mount for 30/40 Jbox	LED-EMB-15W-HV-0/10V-2P Up to 14W fixtures LED-EMB-25W-HV-0/10V-2P Up to 24W fixtures
		<sup>1</sup> . Field installable. Lasts 90 minutes.

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-ATH-10W-5CCT-30D-WH

Line Item#: 27  
[Go to Bill of Materials](#)

Type: TRACK  
HEAD





Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## ARCY-Line: Track Heads


### COB 5-CCT Selectable

#### FEATURES

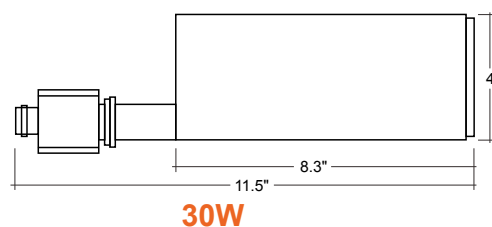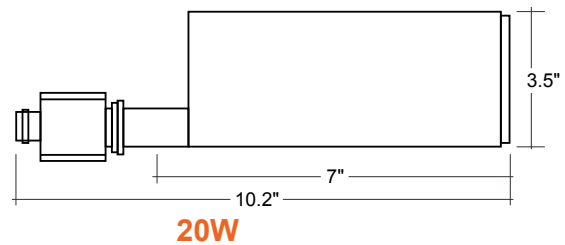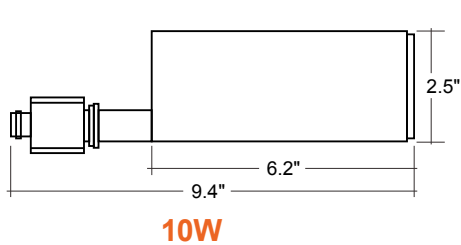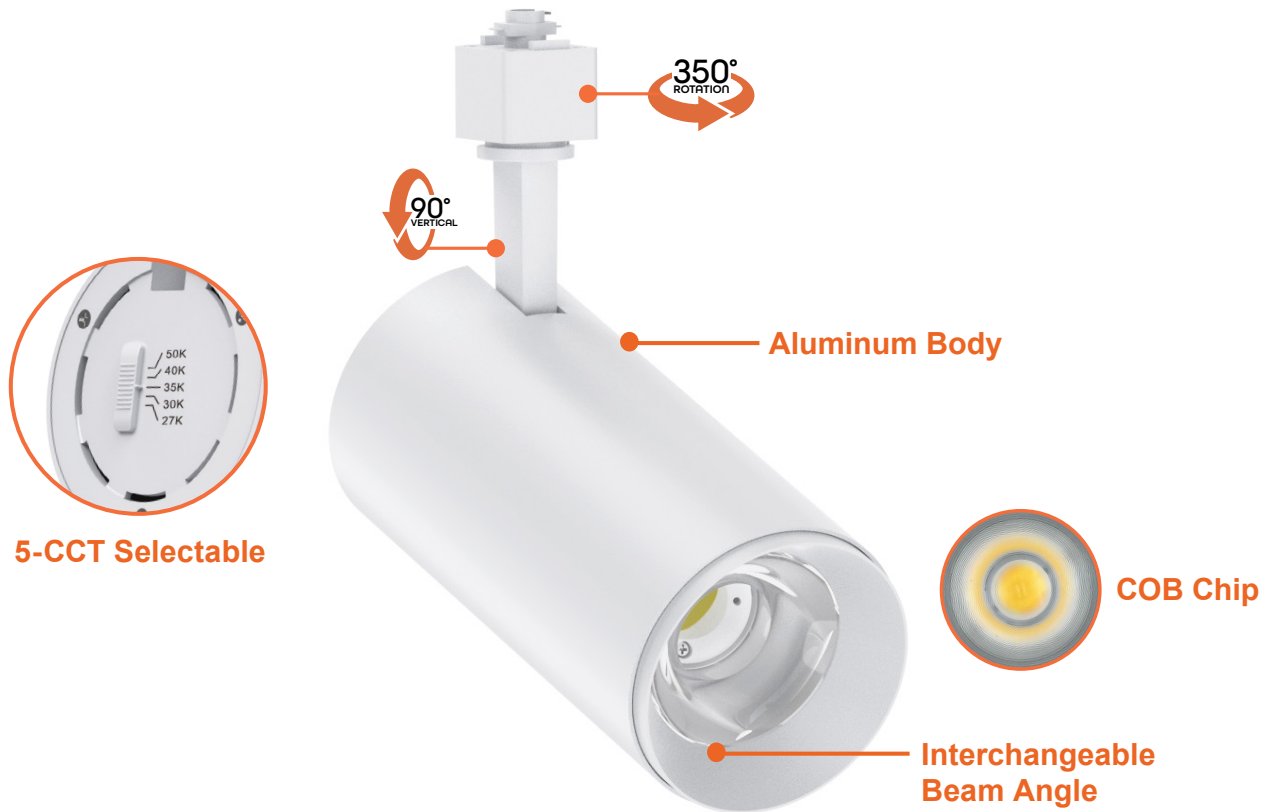

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

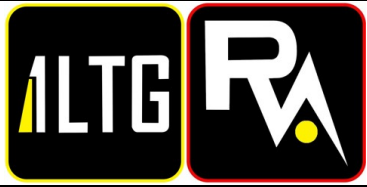

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-ATH-10W-5CCT-30D-WH

Line Item#: 27  
[Go to Bill of Materials](#)

Type: TRACK  
HEAD


Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## ARCY-Line: Track Heads

### COB 5-CCT Selectable

#### ACCESSORIES

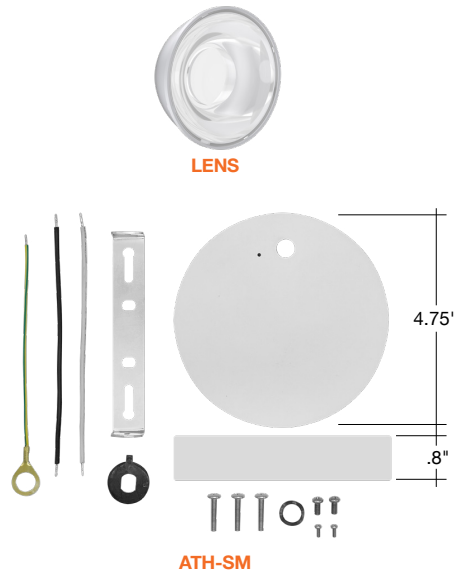

LENS

ATH-SM

#### QUICK SHIP MODELS

Model	Voltage	Watts	Lumens	Color	CRI
LED-ATH-10W-5CCT-30D-WH	120V	10w	1000	27/30/35/40/50K	>90
LED-ATH-10W-5CCT-30D-BLK	120V	10w	1000	27/30/35/40/50K	>90
LED-ATH-20W-5CCT-36D-WH	120V	20w	2000	27/30/35/40/50K	>90
LED-ATH-20W-5CCT-36D-BLK	120V	20w	2000	27/30/35/40/50K	>90
LED-ATH-30W-5CCT-36D-WH	120V	30w	3000	27/30/35/40/50K	>90
LED-ATH-30W-5CCT-36D-BLK	120V	30w	3000	27/30/35/40/50K	>90

#### OPTIC LENS

Model	Description
ATH-10W-24D	Track Heads: ACRY-Line 24D Optic
ATH-10W-60D	Track Heads: ACRY-Line 60D Optic
ATH-20W-24D	Track Heads: ACRY-Line 24D Optic
ATH-20W-60D	Track Heads: ACRY-Line 60D Optic
ATH-30W-24D	Track Heads: ACRY-Line 24D Optic
ATH-30W-60D	Track Heads: ACRY-Line 60D Optic

#### SURFACE MOUNT

Accessory	Description
ATH-SM	Surface Mount for 30/40 Jbox

#### BATTERY BACK-UP

Accessory	Description
LED-EMB-15W-HV-0/10V-2P	Up to 14W fixtures
LED-EMB-25W-HV-0/10V-2P	Up to 24W fixtures


#### TESTED COMPATIBLE DIMMERS

Other dimmers may be compatible but have not been tested.  
Please contact us for more information.

Lutron	Leviton	Toshiba	Panasonic
DVCL-153P	6674	WDG9001	WN575149
SCL-153P			
LGCL-153P			
MACL-153M			
MSCL-OP153M			
S-600P			
AYCL-153			
DV-600P			

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

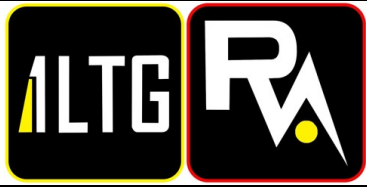

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
SM56885FTSN

Line Item#: 29  
[Go to Bill of Materials](#)

Type: SM13

Powered by 4submittal.com


Essentials - 588x | SM56885FTSN

Job Name: Job Type: Quantity: Comments:



#### PRODUCT DESCRIPTION

Maxim Lighting's commitment to both the residential lighting and the home building industries will assure you a product line focused on your lighting needs. With Maxim Lighting you will find quality product that is well designed, well priced and readily available.



#### MEASUREMENTS

DIMENSION : 9" L x 9" W x 5" H  
HANGING WEIGHT : 2.18 lb

#### LAMPING

INPUT VOLTAGE : 120V  
BULB : 60W Incandescent E26 Medium , 120W Total  
BULB INCLUDED : (Not Included)  
DIMMABLE : Yes

#### FINISHES OPTION

Oil Rubbed Bronze (OI)  
 Satin Nickel (SN)

#### GLASS

Frosted FT

#### MATERIAL

Glass, Steel

#### RATINGS

cETLus  
Damp Location



#### ADDITIONAL

OPERATING TEMPERATURE:  
-20°C (-4°F), 40°C (104°F)

Always consult a qualified electrician before installing any lighting product.

# STUDIO•M

Modifications or Customizations: Please email [contract@studiomlighting.com](mailto:contract@studiomlighting.com)

Sample Request: Please email [order@studiomlighting.com](mailto:order@studiomlighting.com) with subject line

"Sample Order, [Project Name] / [Specifier/Designer]"

All samples are subject to Studio M approval and must show proof of project and/or explanation.

Job Name:	Job Type:
Quantity:	Comments:

StudioMlighting.com - 1.626.956.4209



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-A19-9W-5CCT

Line Item#: 30  
[Go to Bill of Materials](#)

Type: SM13 LAMP

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

Project: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_

LED Bulbs



## A Bulb SERIES: 5-CCT LED BULBS



A-19, A-21



A-19



A-21



### Detail Specifications

- IP Rating: Damp Location
- Beam Angle: 220°
- 5-CCT: 27/30/35/40/50K
- Chip: SMD 2835, R9 >50, CRI >90
- Operating Temperature: -4° - 114° F
- Average life (L70) of 25,000 hours

### Applications:

- Decorative Lighting
- Interior Lighting
- Table & Floor Lamps
- Showcases
- Residential, Multi-Family, Commercial

### Product Information:

- Suitable for use in existing fixtures
- Instant-On to full brightness

### Driver Options:

- 120V
- Triac Dimmable
- PF >0.9, 50/60Hz

### Mounting & Installation:

- E26 Socket
- Direct A Lamp Replacement

### Packaging:

- All bulbs come in individual color boxes, but are sold in inner carton qty packs only

Carton Qty.	A-19	A-21
Inner Carton	10	10
Master Carton	100	100

### Certifications:

- ETL Listed for USA and CA
- Energy Star
- Title 20 and JA8-2022 Approved
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

### Dimmer List:

Leviton	6674
Lutron	LGCL-153P
Lutron	DVCL-153P
Lutron	CTCL-153P
Lutron	MAELV-300

Series

**LED-A19-9W-5CCT**

600 Lumens 60W Equivalent

**LED-A21-15W-5CCT**


1,600 Lumens 100W Equivalent

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 10.23

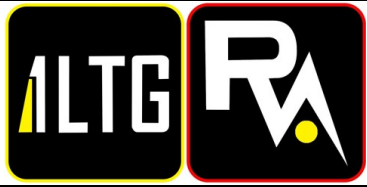

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 31  
[Go to Bill of Materials](#)

Type: SM2

Powered by 4submittal.com




LIGHTING | REINVENTED

plano **ARCH** PRO

## LDLL | Eclipse-II

Product Data Sheet

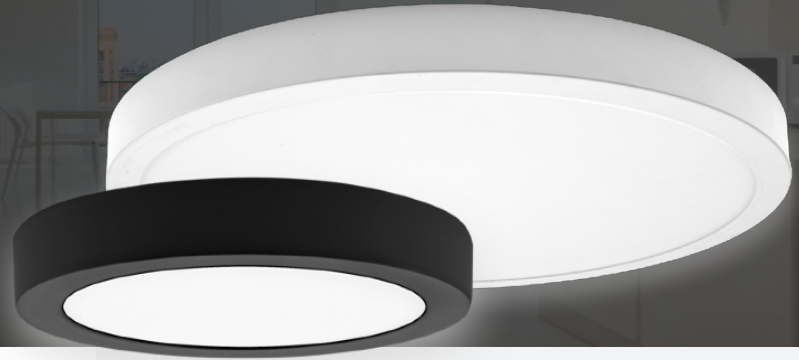

COMMERCIAL-GRADE

### LED Surface Mount Puck Downlight



CCTselect



TruColor Rendering

5" / 7" / 9" / 11" / 13"

#### Product Overview

**INTENDED USE** — The Eclipse-II Series is built for 5-way switchable CCT and is suitable for use in dry, damp, and wet locations, perfect for use in kitchens, hallways, stairways, bathrooms, closets, and just about anywhere you'd need it.

**CONSTRUCTION** — The die-cast aluminum housing is designed for durability and ruggedness.

**INSTALLATION** — Quick-mount aluminum backplate for easy installation.

**WARRANTY** — Featuring a no-compromise 5-year warranty, Energy Star and JA8-compliant, the Eclipse-II is a clean and modern solution for surface mounted driverless design.

ARCHIPELAGO luminaires and LED components undergo rigorous testing by an independent laboratory to meet IESNA LM-79 and LM-80 standards for light output and lumen maintenance. LED color temperature is warranted to shift no more than 180K over the standard warranty period. Correlated Color Temperature (CCT) follows the guidelines set forth in the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

#### Applications



Residential



Hallway



Patio



Entryway

#### Main Features

- Low-Profile Edge-Lit Surface Mount Design
- Durable Di-Cast Aluminum Trim w/ Frosted Lens
- For New Construction or Retrofit Applications
- Suitable for Use in Dry, Damp and Wet Locations
- Suitable for Use in Closets, In Accordance to NEC Guidelines
- Installs on Ceiling and Standard Junction Boxes
- Dimmable to 10% on Compatible TRIAC Dimmers
- 5-Year, 50,000 Hr Warranty
- CEC T24 JA8 Compliant
- NEC Compliant, Suitable for Use in Closet
- Energy Star Certified for 5", 7", 9"

#### Product Warranty\*

5-Year Warranty



50,000 Hrs



\* Standard warranty. Extended warranty available.

Archipelago Lighting, Inc.

| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

[Contact Us](#)



LDLL | Eclipse-II



Project Details

Project Name:

Fixture Schedule:

Project Number:

Notes:

Highlights

Features		Description
5-CCTselect		CCT selectable: 5-way dip-switch
Sensor Ready		Optional plug-n-play motion sensor available on 7" and 9"
TruColor High CRI		Title 24 Compliant. JA8 LED 90CRI+
Limited Warranty		5-Year Warranty

Key Specifications

- Input Voltage: 120V
- Dimming: TRIAC
- Efficacy: ≤103lm/W
- IP: Suitable for Wet Location
- Housing: Die-Cast Aluminum
- Power Factor (PF): >0.9 Non-Flicker
- Operating Temperature: -4°F - 113°F
- Total Harmonic Distortion (THD): <20%
- Beam Angle (°): 120°

Certifications



Model Specifications

Model	Size (in)	Wattage (W)	Lumen (lm)	Efficacy (lm/W)	5-CCTselect (K) <sup>1</sup>	Voltage (V)	CRI
LDLL0510	5"	10W	671lm 675lm 698lm 712lm 689lm	67lm/W 68lm/W 70lm/W 71lm/W 69lm/W	2700K 3000K 3500K 4000K 5000K	120V	90CRI+
LDLL0715	7"	15W	1,187lm 1,205lm 1,211lm 1,257lm 1,241lm	79lm/W 80lm/W 81lm/W 84lm/W 83lm/W	2700K 3000K 3500K 4000K 5000K		
LDLL0918	9"	18W	1,409lm 1,415lm 1,436lm 1,460lm 1,442lm	78lm/W 79lm/W 80lm/W 81lm/W 80lm/W	2700K 3000K 3500K 4000K 5000K		
LDLL1121	11"	21W	2,022lm 2,035lm 2,054lm 2,165lm 2,159lm	96lm/W 97lm/W 98lm/W 103lm/W 103lm/W	2700K 3000K 3500K 4000K 5000K		
LDLL1324	13"	24W	2,393lm 2,407lm 2,450lm 2,455lm 2,446lm	100lm/W 100lm/W 102lm/W 102lm/W 102lm/W	2700K 3000K 3500K 4000K 5000K		

1. Default settings on CCTselect is highest CCT available.

Archipelago Lighting, Inc.

| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 31  
[Go to Bill of Materials](#)

Type: SM2

Powered by 4submittal.com



LDLL | Eclipse-II

**Low-Glare Lens**  
Smooth diffused light output.

**Driverless**  
Minimizes installation height.

**IP54**  
Suitable for damp locations.

**Solid Backplate**  
Passive heat dissipation.

**Edge-Lit Technology**  
Even and uniform light distribution.

**PMMA Lens**  
Durable, no-yellowing lens.



#### Ordering Guide<sup>1</sup>

Model Series	Size (in) / Wattage (W)		Series	CCTselect (K)	Finish Color
<b>LDLL</b> LED Surface Mount Puck Downlight	<b>0510</b> 5inch / 10W <b>0715</b> 7inch / 15W <b>0918</b> 9inch / 18W <b>1121</b> 11inch / 21W <b>1324</b> 13inch / 24W	-	<b>E2</b> Eclipse-II	<b>S5</b> 5-CCTselect: 2700K 3000K 3500K 4000K 5000K	/ <b>B</b> Black <b>W</b> White
<b>CATALOG #:</b>					
<b>LDLL</b>		-	<b>E2</b>	<b>S5</b>	/

#### Options Guide<sup>2</sup>

EM Driver <sup>3</sup>	Motion Sensor
<input type="checkbox"/> <b>EM15</b> 15W EM Driver <input type="checkbox"/> <b>CRCU</b> 15W EM Driver with Junction Box	<input type="checkbox"/> <b>MSP/W</b> PIR Bi-Level Sensor for 7" and 9" ONLY (White Finish)
<b>OPTIONAL ACCESSORIES #:</b>	
	/

**NOTE:**

- Only one selection may be applicable within the same category.
- Multiple selections may be applicable within the same option category. See Compatible Accessories below for details.
- EM drivers only work with 7, 9, 11 and 13in fixtures

#### Archipelago Lighting, Inc.

| **Headquarter:** 4615 State Street, Montclair, CA 91763


| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

#### Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220








	Date: 1/12/2026	Description: LDLL0510-E2S5/W	Line Item#: 31
	Project: FINDLAY FLATS		<a href="#">Go to Bill of Materials</a>
			Type: SM2
Powered by 4submittal.com			



LDLL | Eclipse-II

Sizing & Measurements


Model Series	Dimensions	Overall Diameter (in)	Depth (IN)
LDLL0510-E2		5.51	0.79
LDLL0715-E2		7.48	0.82
LDLL0918-E2		8.86	0.79
LDLL1121-E2		10.98	0.98
LDLL1124-E2		12.80	0.98

Recommended Dimmers

Make	Models			
Lutron	TG-600PR-WH S-600PR-WH CTCL-153PDH-WH	TGCL-153PH-LA SLV-600P-AL DV-600PR-WH	SCL-153PH-WH GT-600P DVCL-153P	MSCL-OP153M MACL-153M//MA-R PD-6WCL
Leviton	6672 IPL06	6674	DSL06	RNL06

Accessories (Standard)

Accessories (Optional)



<b>Mounting Bracket</b>	<b>Wire Nuts</b>	<b>Bolts</b>	<b>15W EM Driver</b>	<b>PIR Bi-Level Sensor</b>
Compatible to 2.75" or 3.50" Junction Box			EM15-HMB/170DC CRCU-EM/JBM	LDLL-E2/MSP/W

Archipelago Lighting, Inc.

| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 31  
[Go to Bill of Materials](#)


Type: SM2


Powered by 4submittal.com



LDLL | Eclipse-II

EM Driver / J-Box (Optional)

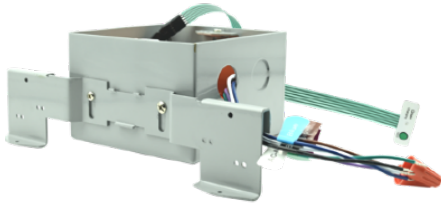

Technical Specification	CRCU-EM/JBM
Emergency Power	15W Max
Installation Method	Recessed
IP Rating	IP20
CEC T.24/JA8 Compliant	Yes
Color Finish	Grey
Physical Features	<ul style="list-style-type: none"><li>Directly connect to AC input</li><li>Fits 2.75" and 3.5" J-Box</li><li>Supports recessed in-ceiling mount</li></ul>
Self-Diagnostic Test Switch	<ol style="list-style-type: none"><li>Emergency conversion kit will go into emergency mode when test switch is pressed while main power is ON.</li><li>Will go into charging mode if test switch is not pressed.</li><li>In emergency mode, pressing the test switch for 3-seconds will inactivate emergency mode.</li></ol>
Indicator Status Light	<ol style="list-style-type: none"><li>Green ON: Charging mode / charging full</li><li>Green OFF: Mains power OFF / discharging mode</li></ol>
Dimension	<p>W4.29in x H2.96</p> 

Archipelago Lighting, Inc.

| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
MAKO-LED-ACEM-DB-IH

Line Item#: 32  
[Go to Bill of Materials](#)

Type: EMW1

Powered by 4submittal.com



## MAKO-LED Series

LED GENERAL & EMERGENCY LIGHTING



PROJECT:

FIXTURE TYPE:

LOCATION:

CONTACT/PHONE:

### PRODUCT DESCRIPTION

An indoor/outdoor architecturally styled high performance LED Luminaire available with 'normally-on' operation powered by line voltage, emergency operation powered by a Nickel-Cadmium battery source or a combination of both. Low profile, die-cast aluminum housing available in four powder coat finishes: dark bronze, white, nickel and black. Units come standard with a single 11W high-performance LED featuring 1080 lumens in AC mode and 260 lumens in emergency backup mode, 5000K CCT and a CRI of 70. Features a UV-stable mirror-bright reflector and prismatic polycarbonate refractor for ideal light output

### PRODUCT SPECIFICATIONS

#### CONSTRUCTION

Die cast aluminum housing • Scratch resistant Polyester powder coat finish • UV stabilized polycarbonate lens with prismatic pattern designed for path of egress distribution • Molded mirror finish reflector • Snap-fit housing and mounting plate are held together by four stainless steel clips • Universal mounting pattern molded into the back plate • Threaded top access for surface conduit installation • Silicone rubber seal with hollow center, shape adaptive design protects the electrical components • Junction box neoprene seal is attached to the back plate for a weather proof installation • Dark Bronze, Black, White or Nickel textured finish.

#### ELECTRICAL

Dual voltage 120/277VAC 60Hz input • Solid state charging and switching • Battery low voltage disconnect • AC power indicator and test switch at the bottom of the unit • Self Diagnostics standard on battery units.

#### LAMPS

Supplied with two CREE LED lamps for redundancy • 11 Watts total • 1080 Lumens 5000K color temperature • Features a UV stable mirror-bright reflector and prismatic polycarbonate refractor for ideal light output.

#### BATTERY

Maintenance-free NiCad battery will operate fixture for a minimum of 90 minutes in the event of a power outage.

#### CODE COMPLIANCE

UL924 • Listed for wet location applications (0°C-50°C) • Optional "IH" cold weather package for (-20°C-50°C) • IP65 Rated • NFPA 101 Life Safety Code compliant • NEC and OSHA compliant.


#### WARRANTY

5-year warranty. Product specifications subject to change without notice.

### INSTALLATION

#### MOUNTING

Suitable for indoor or outdoor wall mounting on junction box, or with surface conduit using the supplied 1/2" threaded top access • Mounting plate has molded universal mounting pattern for simple mounting over junction box.

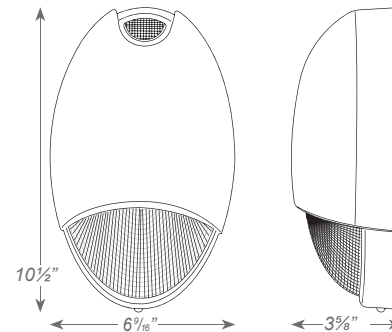

#### ACEM Model (NiCad Battery Backup)

**Integral photocell:** Unit operates as a dusk to dawn luminaire and in the event of a power failure as an emergency light.

**Remote Switched:** The integral photocell can be defeated to allow remote switching for normal operation. In the event of a power failure unit operates as an emergency light.

**Normally Off:** Both the photocell and switch options can be defeated for use as a standard emergency light that only operates in battery backup mode in the event of power loss.

#### AC Model (No Battery Backup)

**Integral photocell:** Enables operation as a dusk to dawn general lighting luminaire.


**AC Only :** The integral photocell can be defeated to allow remote switching as a general lighting luminaire.



# MAKO

### ORDERING INFORMATION

model	operation mode	housing color	options
MAKO-LED	ACEM = General & Emergency Lighting	DB = Dark Bronze	IH = Internal Battery Heater
	AC = General Lighting Only	WH = White	
		BK = Black	
Ordering Example: MAKO-LED-ACEM-DB		NK = Nickel	

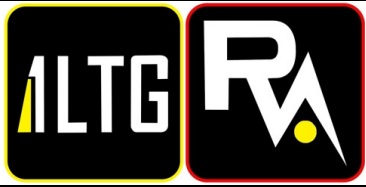

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
MAKO-LED-ACEM-DB-IH

Line Item#: 32  
[Go to Bill of Materials](#)

Type: EMW1

Powered by 4submittal.com



## MAKO-LED Series

LED GENERAL & EMERGENCY LIGHTING



PROJECT:


FIXTURE TYPE:

LOCATION:


CONTACT/PHONE:

### PHOTOMETRICS

3ft Path Spacing

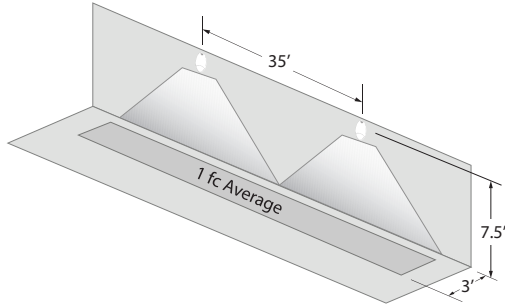

6ft Path Spacing

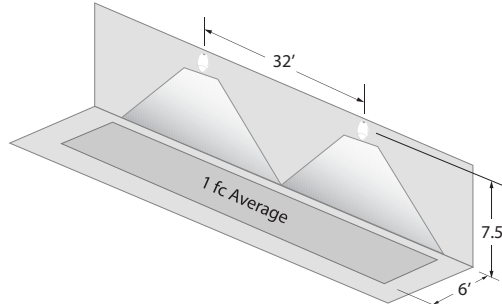

### BATTERY DATA

- NiCad battery warranted for one full year
- Recharges in 48 hours or less

Type	Battery Voltage	Shelf Life <sup>1</sup>	Expected Life <sup>1</sup>	Ambient Temperature Range <sup>2</sup>
NiCad	4.8V	10 years	5-8 years	32°F to 122°F (0° to 50°C)
NiCad with heater (IH option)	4.8V	10 years	5-8 years	-4°F to 122°F (-20° to 50°C)

<sup>1</sup> At 77°F


### Included Self Diagnostic

Diagnostic Indicator / Test Switch	Ready	In Test	Battery Circuit Fault	Battery Capacity Failure	Charger Failure	Transformer Fault	Lamp Failure
	●	●	●	●	●	●	●

#### Manual Testing

- Press button once - 1 minute test
- Press button twice - 5 minute test
- Press button 3 times - 30 minute test
- Press button 4 times - 90 minute test

Full self-test, self-diagnostic system is standard in every unit, performs a monthly, test as well as continuously monitoring all functions to ensure reliability, a manual test may be initiated at any time

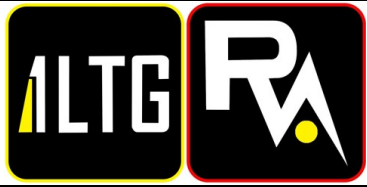

Date: 1/12/2026

Project:  
FINDLAY FLATS


Description:  
CFR525J1-N10-WP-1-FM

Line Item#: 34  
[Go to Bill of Materials](#)

Type: F2

Powered by 4submittal.com

**CARRO**  
SMART FANS | LIGHTING

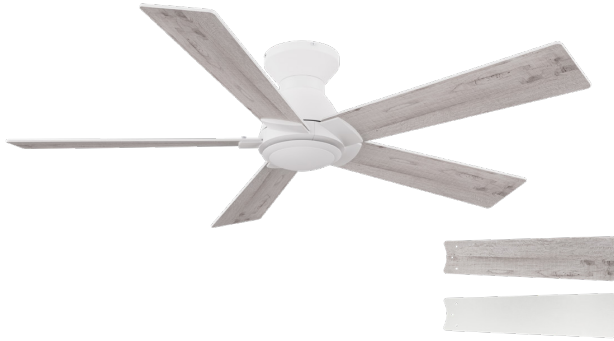

#### DC Motor

- 10-Speed | Reversible
- Motor | 148 X 15mm
- RPM: High 205 Low 65
- 4630 CFM | 26 W | Efficiency = 174 CFM / Watt

#### Blade

- 5-Blade | 52" Sweep
- Material: Highly-Compressed Plywood
- 11° Pitch

#### Light Kit

- No Light
- Metal Plate

#### Control

- Remote (Standard)
- Wall Control (Optional\*)
- Pull Chain (Optional\*)

#### Location

- Indoor / Outdoor (Damp Rated)

#### Certification

- ETL Listed

#### Warranty

- Fan Motor: Three-Year Limited Warranty
- Fan Blade: Three-Year Limited Warranty
- Other: Three-Year Limited Warranty

#### Measurements

- Dimensions (in.):  
10.8 H (to lowest point) x 7 W (housing) x 7.2 H (top of blade)
- Product Weight (lbs.): 11.2 N.W. | 15 G.W.
- Box (in.): 23 L X 11 W X 10 H

#### Shipping

- Container Loading:  
20GP 680 pcs | 40GP 1400 pcs | 40HQ 1640 pcs

#### SKU #

CFR525J1-N10-WP-1-FM

#### Motor/Blade Finish

White | White & Whitewashed  
Reversible Plywood Blades

## LURGAN

5-Blade | 52 " | Flushmount | Remote Control  
DC MOTOR 120V  
NO LIGHT



Intertek


Fan Motor

Fan Blade

Other

#### Dimensions

10.8"	7"	7.2"
Height (lowest point)	Width (housing)	Height (top of blade)

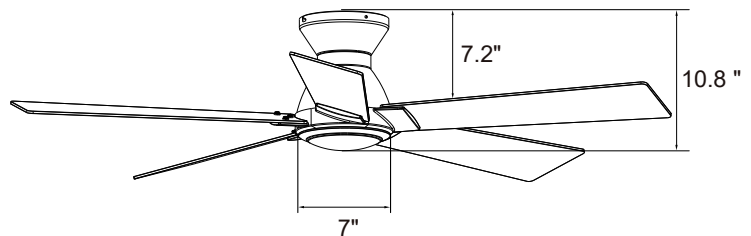

#### Fan Control Features and Options


- Simple and intuitive design with standard layout.
- Multi-functional fan speed control with fan forward/reverse, and fan on/off.
- Remote (Standard)
- Hardwired Wall Control (Optional\*)
  - Single Live Wire No Neutral Needed
  - Push Button or Knob design available
- Pull Chain (Optional\*)

\* Optional controls at an additional cost

Remote



Push Button




Knob



Pull Chain



\* Data subject to change without notice.

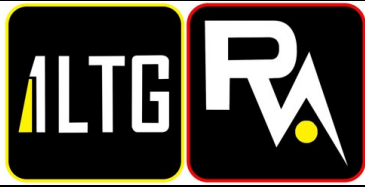

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-DH-HO

Line Item#: 35  
[Go to Bill of Materials](#)

Type: EM

Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Emergency Bug Eyes Square Models



Emergency



### Detail Specifications:

- Finish: White
- IP Rating: Dry Location
- Lumen Options
  - Standard: 3W 140LM
  - High Output: 6W 650LM
- Operating Temperature: -40° - 104° F
- Average life (L70) of 50,000 hours

### Applications:

- Exit Doors
- Corridor Intersections
- Exit Stairways
- Exit ramps

### Product Information:

- Built-in test switch and charge indicator light
- Overcharge and over-discharge protection
- Injection-molded thermoplastic housing, PC cover
- Backup Time: >90 minutes
- Recharge time: 24 hours

### Driver Options:

- Dual Voltage 120/277V
- PF >0.9, 50/60Hz
- Nickel Cadmium Battery 3.6V
- This fixture is non-dimmable

### Mounting & Installation:

- Wall and ceiling mounted
- Universal J-box mounting pattern

### Certifications:

- UL Listed for USA and CA (UL94V-0 Flame Rating)
- Meets UL924, NDPA 101
- Approved for CA T24
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

#### Series

**LED-EM-DH**

3W • 140Lm

**LED-EM-DH-HO**


6W • 650Lm

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 01.24

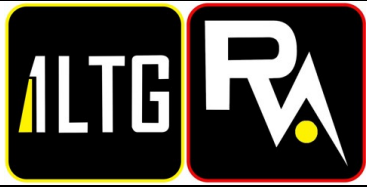

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-DH-HO

Line Item#: 35  
[Go to Bill of Materials](#)


Type: EM

Powered by 4submittal.com


**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Emergency Bug Eyes Square Models

### FEATURES

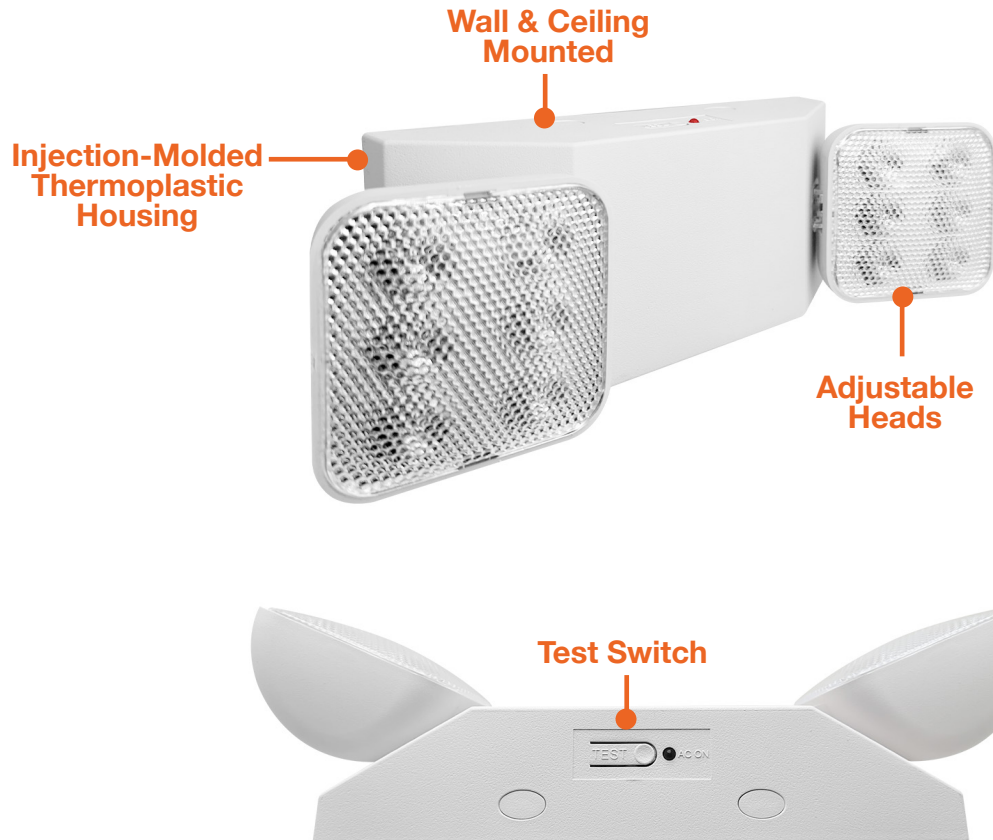

### DIMENSIONS

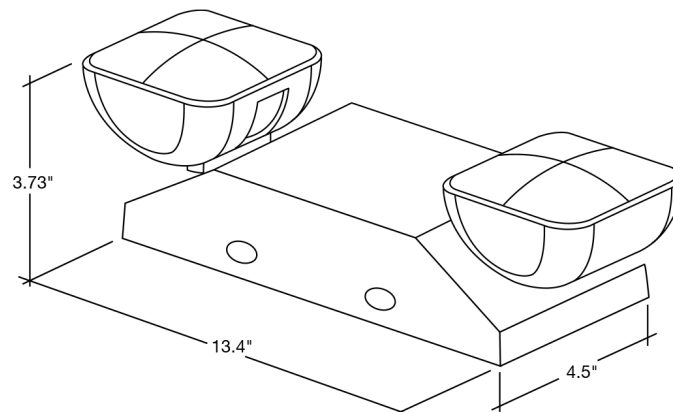

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-EXT-RG-WH-CMB-RC

Line Item#: 36  
[Go to Bill of Materials](#)

Type: EX/EM

Powered by 4submittal.com

**EnVisionLED**<sup>TM</sup>  
[WWW.ENVISIONLEDLIGHTING.COM](http://WWW.ENVISIONLEDLIGHTING.COM)

## Emergency Exit Sign With Bug Eyes



### Emergency Exit Signs



Project: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_

#### Detail Specifications:

- Finish: White Finish
- IP Rating: IP20, Dry Location
- Wattage: 3.5W
- Lumens: 140
- Operating Temperature: 32°F to 104°F
- Lens: Red or Green
- Remoted Capable
- Compatible with: LED-EM-RC-1, LED-EM-RC-2
- Average life (L70) of 50,000 hours

#### Applications:

- Exit Doors
- Corridor Intersections
- Exit Stairways
- Exit Ramps

#### Product Information:

- Built-in test switch and charge indicator
- Injection-molded thermoplastic housing, PC cover
- Backup Time: >90 minutes
- Recharge time: 24 hours
- Single Face
- 6" height letters with 3/4" stroke, viewable from 100ft away

#### Driver Options:

- Dual Voltage 120/277V
- PF >0.9, 50/60Hz

#### Mounting & Installations:

- Wall and ceiling mounted
- Universal J-box mounting pattern

#### Certifications:

- UL Listed for USA and CA (UL94V-0 Flame Rating)
- Meets UL924, NDPA 101
- Approved for CA T24
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

#### REMOTE HEAD OPTIONS

LED-EM-RC-1

LED-EM-RC-2

Series

**LED-EM-EXT-RG-WH-CMB-RC**


Red/Green Color Selectable

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 08.25

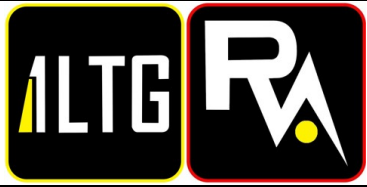

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-EXT-RG-WH-CMB-RC

Line Item#: 36  
[Go to Bill of Materials](#)

Type: EX/EM

Powered by 4submit.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## Emergency Exit Sign With Bug Eyes

### FEATURES

Film Protectant

Fire-Retardant




Adjustable Knuckle

Super Bright COB LED

Wall & Ceiling Mount


### DIMENSIONS

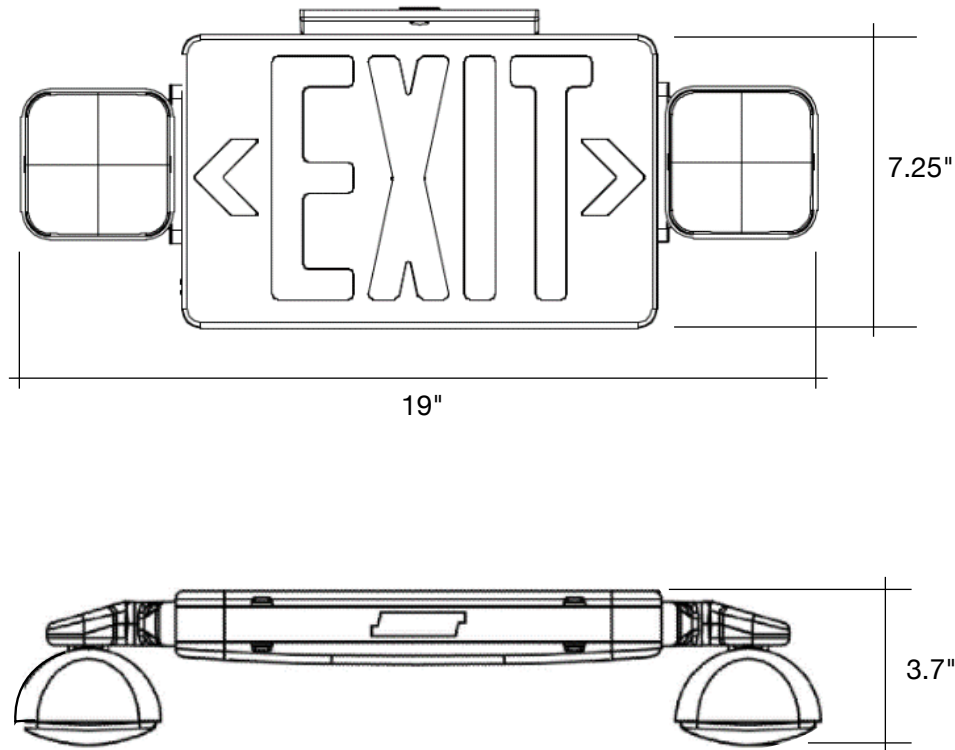

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

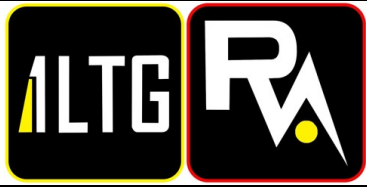

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-RC-1

Line Item#: 37  
[Go to Bill of Materials](#)

Type: RH1

Powered by 4submittal.com



Project: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_



## Single/Double Remote Head

### Product Information:

- Injection-Molded Thermoplastic ABS Housing
- 320 Lumens
- UL-940V-0 Flame Rating
- Wall and Ceiling Mounting
- Input Voltage: 3.6-24 VDC
- Super Bright SMD LED 2.4W
- IP Class: IP65
- Insulation: Class II
- Operating Temperature: 0°F ~ 104° F
- Remote Capable
- Compatible with but Not Limited to  
LED-EM-EXT-G-WH-CMB-RC  
or LED-EM-EXT-R-WH-CMB-R
- 5 Year Limited Warranty



Product Head  
LED-EM-RC-1


**1 Product**  
LED-EM-RC Remote Head


**2 Head**  
Single 1  
Double 2

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)



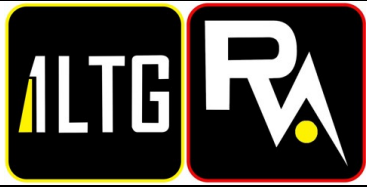

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-RC-1

Line Item#: 37  
[Go to Bill of Materials](#)

Type: RH1

Powered by 4submittal.com




## Single/Double Remote Head

### FEATURES



### FEATURES

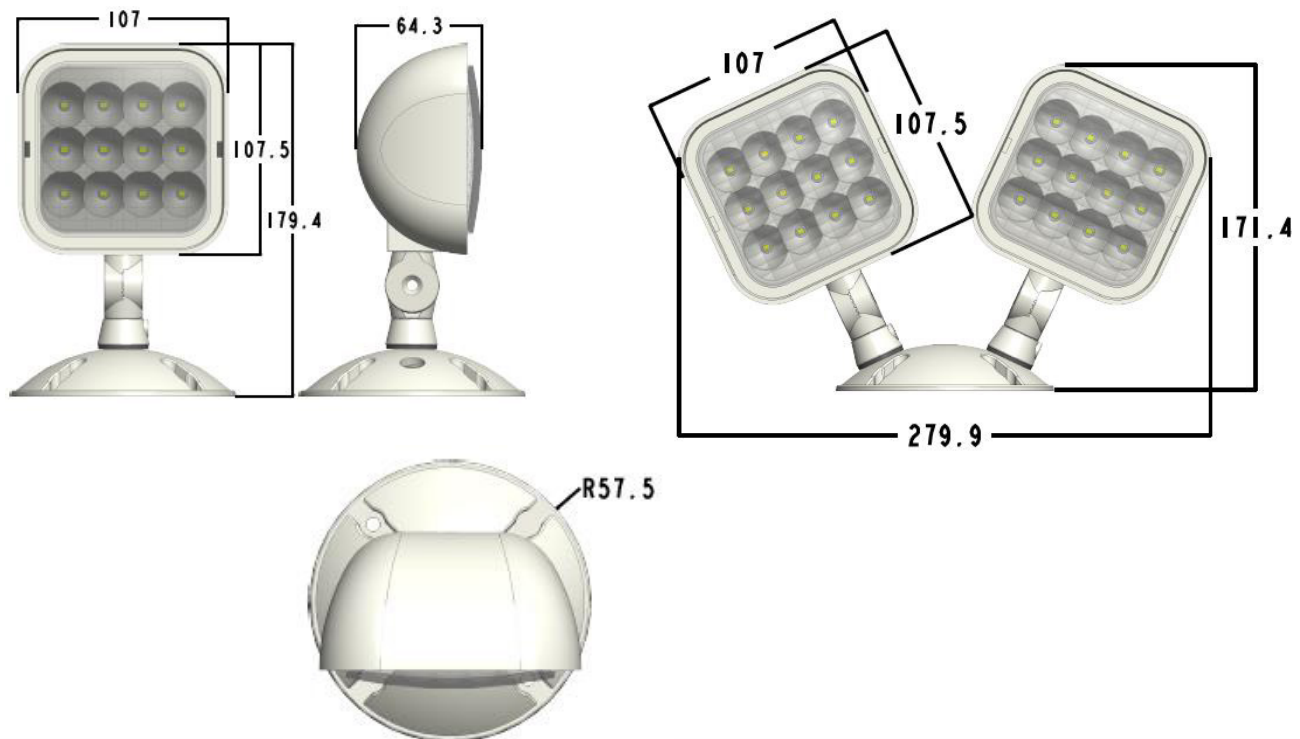

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)







Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 38  
[Go to Bill of Materials](#)

Type: SM1

Powered by 4submittal.com




LIGHTING | REINVENTED

plano **ARCH** PRO

## LDLL | Eclipse-II

Product Data Sheet

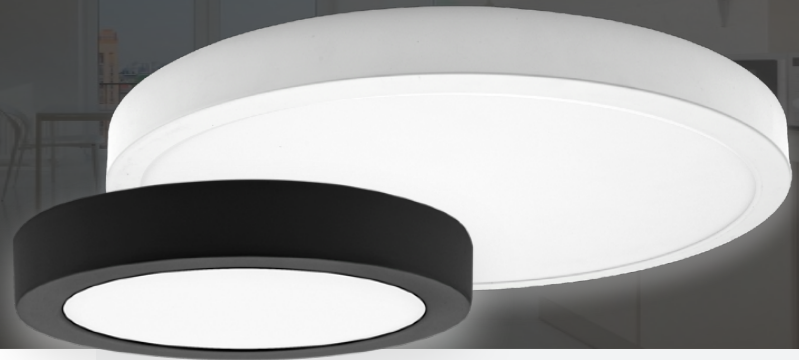

COMMERCIAL-GRADE

### LED Surface Mount Puck Downlight



CCTselect



TruColor Rendering

5" / 7" / 9" / 11" / 13"

#### Product Overview

**INTENDED USE** — The Eclipse-II Series is built for 5-way switchable CCT and is suitable for use in dry, damp, and wet locations, perfect for use in kitchens, hallways, stairways, bathrooms, closets, and just about anywhere you'd need it.

**CONSTRUCTION** — The die-cast aluminum housing is designed for durability and ruggedness.

**INSTALLATION** — Quick-mount aluminum backplate for easy installation.

**WARRANTY** — Featuring a no-compromise 5-year warranty, Energy Star and JA8-compliant, the Eclipse-II is a clean and modern solution for surface mounted driverless design.

ARCHIPELAGO luminaires and LED components undergo rigorous testing by an independent laboratory to meet IESNA LM-79 and LM-80 standards for light output and lumen maintenance. LED color temperature is warrantied to shift no more than 180K over the standard warranty period. Correlated Color Temperature (CCT) follows the guidelines set forth in the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

#### Applications



Residential



Hallway



Patio



Entryway

#### Main Features

- Low-Profile Edge-Lit Surface Mount Design
- Durable Di-Cast Aluminum Trim w/ Frosted Lens
- For New Construction or Retrofit Applications
- Suitable for Use in Dry, Damp and Wet Locations
- Suitable for Use in Closets, In Accordance to NEC Guidelines
- Installs on Ceiling and Standard Junction Boxes
- Dimmable to 10% on Compatible TRIAC Dimmers
- 5-Year, 50,000 Hr Warranty
- CEC T24 JA8 Compliant
- NEC Compliant, Suitable for Use in Closet
- Energy Star Certified for 5", 7", 9"

#### Product Warranty\*

5-Year Warranty



50,000 Hrs



\* Standard warranty. Extended warranty available.


Archipelago Lighting, Inc.

| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

[Contact Us](#)



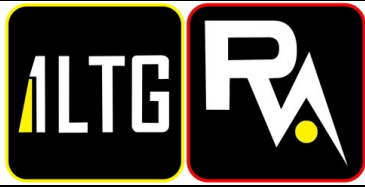

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W


Line Item#: 38  
[Go to Bill of Materials](#)

Type: SM1

Powered by 4submittal.com



LDLL | Eclipse-II

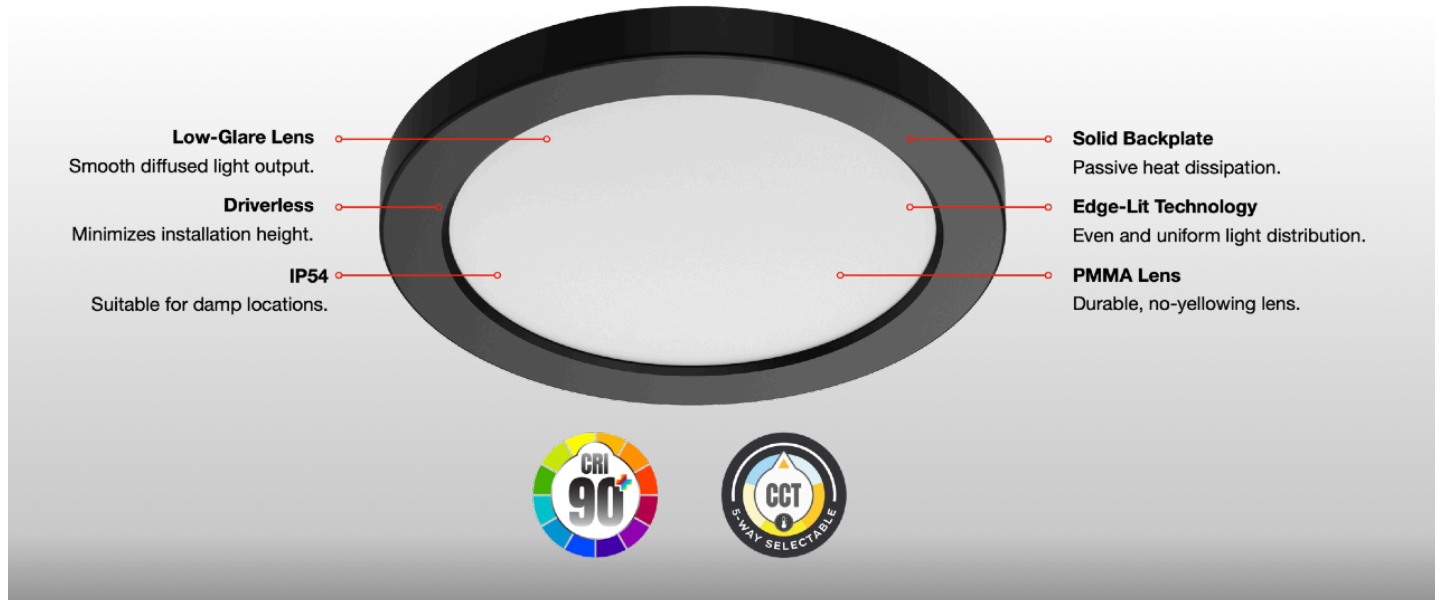

#### Ordering Guide<sup>1</sup>

Model Series	Size (in) / Wattage (W)	Series	CCTselect (K)	Finish Color
<b>LDLL</b> LED Surface Mount Puck Downlight	<b>0510</b> 5inch / 10W <b>0715</b> 7inch / 15W <b>0918</b> 9inch / 18W <b>1121</b> 11inch / 21W <b>1324</b> 13inch / 24W	- <b>E2</b> Eclipse-II	<b>S5</b> 5-CCTselect: 2700K 3000K 3500K 4000K 5000K	/ <b>B</b> Black <b>W</b> White
<b>CATALOG #:</b>				
<b>LDLL</b>		- <b>E2</b>	<b>S5</b>	/

#### Options Guide<sup>2</sup>

EM Driver <sup>3</sup>	Motion Sensor
<input type="checkbox"/> <b>EM15</b> 15W EM Driver <input type="checkbox"/> <b>CRCU</b> 15W EM Driver with Junction Box	<input type="checkbox"/> <b>MSP/W</b> PIR Bi-Level Sensor for 7" and 9" ONLY (White Finish)
<b>OPTIONAL ACCESSORIES #:</b>	

**NOTE:**

- Only one selection may be applicable within the same category.
- Multiple selections may be applicable within the same option category. See Compatible Accessories below for details.
- EM drivers only work with 7, 9, 11 and 13in fixtures

#### Archipelago Lighting, Inc.

| **Headquarter:** 4615 State Street, Montclair, CA 91763


| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

#### Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220








	Date: 1/12/2026	Description: LDLL0510-E2S5/W	Line Item#: 38
	Project: FINDLAY FLATS		<a href="#">Go to Bill of Materials</a>
			Type: SM1
Powered by 4submittal.com			



LDLL | Eclipse-II

Sizing & Measurements


Model Series	Dimensions	Overall Diameter (in)	Depth (IN)
LDLL0510-E2		5.51	0.79
LDLL0715-E2		7.48	0.82
LDLL0918-E2		8.86	0.79
LDLL1121-E2		10.98	0.98
LDLL1124-E2		12.80	0.98

Recommended Dimmers

Make	Models			
Lutron	TG-600PR-WH S-600PR-WH CTCL-153PDH-WH	TGCL-153PH-LA SLV-600P-AL DV-600PR-WH	SCL-153PH-WH GT-600P DVCL-153P	MSCL-OP153M MACL-153M//MA-R PD-6WCL
Leviton	6672 IPL06	6674	DSL06	RNL06

Accessories (Standard)

Accessories (Optional)



<b>Mounting Bracket</b>	<b>Wire Nuts</b>	<b>Bolts</b>	<b>15W EM Driver</b>	<b>PIR Bi-Level Sensor</b>
Compatible to 2.75" or 3.50" Junction Box			EM15-HMB/170DC CRCU-EM/JBM	LDLL-E2/MSP/W

Archipelago Lighting, Inc.

| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 38  
[Go to Bill of Materials](#)


Type: SM1


Powered by 4submittal.com



LDLL | Eclipse-II

EM Driver / J-Box (Optional)

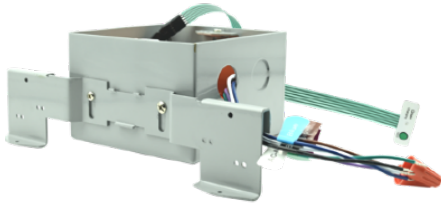

Technical Specification	CRCU-EM/JBM
Emergency Power	15W Max
Installation Method	Recessed
IP Rating	IP20
CEC T.24/JA8 Compliant	Yes
Color Finish	Grey
Physical Features	<ul style="list-style-type: none"><li>Directly connect to AC input</li><li>Fits 2.75" and 3.5" J-Box</li><li>Supports recessed in-ceiling mount</li></ul>
Self-Diagnostic Test Switch	<ol style="list-style-type: none"><li>Emergency conversion kit will go into emergency mode when test switch is pressed while main power is ON.</li><li>Will go into charging mode if test switch is not pressed.</li><li>In emergency mode, pressing the test switch for 3-seconds will inactivate emergency mode.</li></ol>
Indicator Status Light	<ol style="list-style-type: none"><li>Green ON: Charging mode / charging full</li><li>Green OFF: Mains power OFF / discharging mode</li></ol>
Dimension	W4.29in x H2.96 

Archipelago Lighting, Inc.


| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220

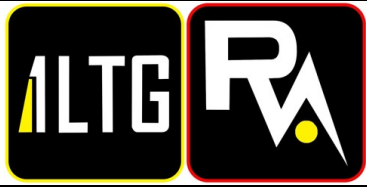

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 39  
[Go to Bill of Materials](#)

Type: SM2

Powered by 4submittal.com




LIGHTING | REINVENTED

plano **ARCH** PRO

## LDLL | Eclipse-II

Product Data Sheet

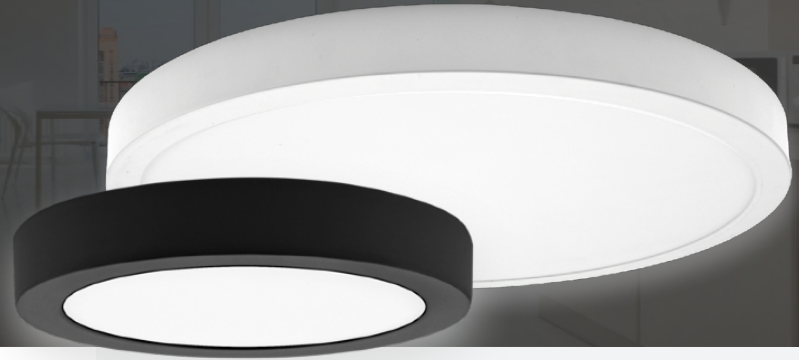

COMMERCIAL-GRADE

### LED Surface Mount Puck Downlight



CCTselect



TruColor Rendering

5" / 7" / 9" / 11" / 13"

#### Product Overview

**INTENDED USE** — The Eclipse-II Series is built for 5-way switchable CCT and is suitable for use in dry, damp, and wet locations, perfect for use in kitchens, hallways, stairways, bathrooms, closets, and just about anywhere you'd need it.

**CONSTRUCTION** — The die-cast aluminum housing is designed for durability and ruggedness.

**INSTALLATION** — Quick-mount aluminum backplate for easy installation.

**WARRANTY** — Featuring a no-compromise 5-year warranty, Energy Star and JA8-compliant, the Eclipse-II is a clean and modern solution for surface mounted driverless design.

ARCHIPELAGO luminaires and LED components undergo rigorous testing by an independent laboratory to meet IESNA LM-79 and LM-80 standards for light output and lumen maintenance. LED color temperature is warranted to shift no more than 180K over the standard warranty period. Correlated Color Temperature (CCT) follows the guidelines set forth in the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

#### Applications



Residential



Hallway



Patio



Entryway

#### Main Features

- Low-Profile Edge-Lit Surface Mount Design
- Durable Di-Cast Aluminum Trim w/ Frosted Lens
- For New Construction or Retrofit Applications
- Suitable for Use in Dry, Damp and Wet Locations
- Suitable for Use in Closets, In Accordance to NEC Guidelines
- Installs on Ceiling and Standard Junction Boxes
- Dimmable to 10% on Compatible TRIAC Dimmers
- 5-Year, 50,000 Hr Warranty
- CEC T24 JA8 Compliant
- NEC Compliant, Suitable for Use in Closet
- Energy Star Certified for 5", 7", 9"

#### Product Warranty\*

5-Year Warranty



50,000 Hrs



\* Standard warranty. Extended warranty available.


Archipelago Lighting, Inc.

| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

[Contact Us](#)



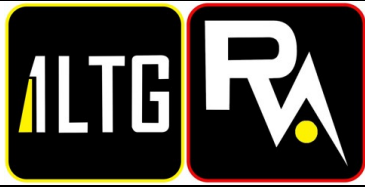

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 39  
[Go to Bill of Materials](#)

Type: SM2

Powered by 4submittal.com



LDLL | Eclipse-II

**Low-Glare Lens**  
Smooth diffused light output.

**Driverless**  
Minimizes installation height.

**IP54**  
Suitable for damp locations.

**Solid Backplate**  
Passive heat dissipation.

**Edge-Lit Technology**  
Even and uniform light distribution.

**PMMA Lens**  
Durable, no-yellowing lens.



#### Ordering Guide<sup>1</sup>

Model Series	Size (in) / Wattage (W)		Series	CCTselect (K)	Finish Color
<b>LDLL</b> LED Surface Mount Puck Downlight	<b>0510</b> 5inch / 10W <b>0715</b> 7inch / 15W <b>0918</b> 9inch / 18W <b>1121</b> 11inch / 21W <b>1324</b> 13inch / 24W	-	<b>E2</b> Eclipse-II	<b>S5</b> 5-CCTselect: 2700K 3000K 3500K 4000K 5000K	/ <b>B</b> Black <b>W</b> White
<b>CATALOG #:</b>					
<b>LDLL</b>		-	<b>E2</b>	<b>S5</b>	/

#### Options Guide<sup>2</sup>

EM Driver <sup>3</sup>	Motion Sensor
<input type="checkbox"/> <b>EM15</b> 15W EM Driver <input type="checkbox"/> <b>CRCU</b> 15W EM Driver with Junction Box	<input type="checkbox"/> <b>MSP/W</b> PIR Bi-Level Sensor for 7" and 9" ONLY (White Finish)
<b>OPTIONAL ACCESSORIES #:</b>	
	/

**NOTE:**

- Only one selection may be applicable within the same category.
- Multiple selections may be applicable within the same option category. See Compatible Accessories below for details.
- EM drivers only work with 7, 9, 11 and 13in fixtures

#### Archipelago Lighting, Inc.


| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

#### Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)






+1 (866) 912-3220

	Date: 1/12/2026	Description: LDLL0510-E2S5/W	Line Item#: 39
	Project: FINDLAY FLATS		<a href="#">Go to Bill of Materials</a>
			Type: SM2
Powered by 4submittal.com			



LDLL | Eclipse-II

Sizing & Measurements


Model Series	Dimensions	Overall Diameter (in)	Depth (IN)
LDLL0510-E2		5.51	0.79
LDLL0715-E2		7.48	0.82
LDLL0918-E2		8.86	0.79
LDLL1121-E2		10.98	0.98
LDLL1124-E2		12.80	0.98

Recommended Dimmers

Make	Models			
Lutron	TG-600PR-WH S-600PR-WH CTCL-153PDH-WH	TGCL-153PH-LA SLV-600P-AL DV-600PR-WH	SCL-153PH-WH GT-600P DVCL-153P	MSCL-OP153M MACL-153M//MA-R PD-6WCL
Leviton	6672 IPL06	6674	DSL06	RNL06

Accessories (Standard)

Accessories (Optional)



<b>Mounting Bracket</b>	<b>Wire Nuts</b>	<b>Bolts</b>	<b>15W EM Driver</b>	<b>PIR Bi-Level Sensor</b>
Compatible to 2.75" or 3.50" Junction Box			EM15-HMB/170DC CRCU-EM/JBM	LDLL-E2/MSP/W

Archipelago Lighting, Inc.

| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 39  
[Go to Bill of Materials](#)


Type: SM2


Powered by 4submittal.com



LDLL | Eclipse-II

#### EM Driver / J-Box (Optional)

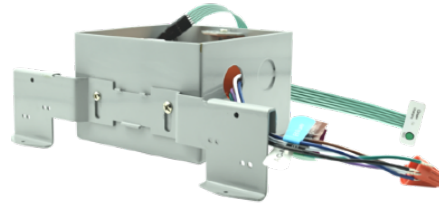

Technical Specification	CRCU-EM/JBM
Emergency Power	15W Max
Installation Method	Recessed
IP Rating	IP20
CEC T.24/JA8 Compliant	Yes
Color Finish	Grey
Physical Features	<ul style="list-style-type: none"><li>Directly connect to AC input</li><li>Fits 2.75" and 3.5" J-Box</li><li>Supports recessed in-ceiling mount</li></ul>
Self-Diagnostic Test Switch	<ol style="list-style-type: none"><li>Emergency conversion kit will go into emergency mode when test switch is pressed while main power is ON.</li><li>Will go into charging mode if test switch is not pressed.</li><li>In emergency mode, pressing the test switch for 3-seconds will inactivate emergency mode.</li></ol>
Indicator Status Light	<ol style="list-style-type: none"><li>Green ON: Charging mode / charging full</li><li>Green OFF: Mains power OFF / discharging mode</li></ol>
Dimension	W4.29in x H2.96 

#### Archipelago Lighting, Inc.

| Headquarter: 4615 State Street, Montclair, CA 91763


| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

#### Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220



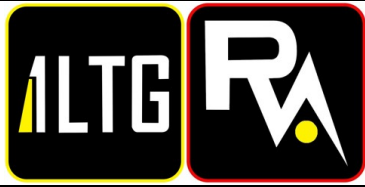

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 40  
[Go to Bill of Materials](#)

Type: SM3

Powered by 4submittal.com




LIGHTING | REINVENTED

plano **ARCH** PRO

## LDLL | Eclipse-II

Product Data Sheet

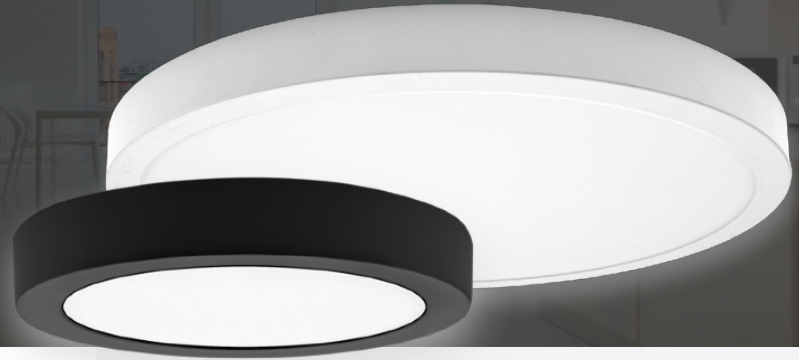

COMMERCIAL-GRADE

### LED Surface Mount Puck Downlight



CCTselect



TruColor Rendering

5" / 7" / 9" / 11" / 13"

#### Product Overview

**INTENDED USE** — The Eclipse-II Series is built for 5-way switchable CCT and is suitable for use in dry, damp, and wet locations, perfect for use in kitchens, hallways, stairways, bathrooms, closets, and just about anywhere you'd need it.

**CONSTRUCTION** — The die-cast aluminum housing is designed for durability and ruggedness.

**INSTALLATION** — Quick-mount aluminum backplate for easy installation.

**WARRANTY** — Featuring a no-compromise 5-year warranty, Energy Star and JA8-compliant, the Eclipse-II is a clean and modern solution for surface mounted driverless design.

ARCHIPELAGO luminaires and LED components undergo rigorous testing by an independent laboratory to meet IESNA LM-79 and LM-80 standards for light output and lumen maintenance. LED color temperature is warranted to shift no more than 180K over the standard warranty period. Correlated Color Temperature (CCT) follows the guidelines set forth in the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

#### Applications



Residential



Hallway



Patio



Entryway

#### Main Features

- Low-Profile Edge-Lit Surface Mount Design
- Durable Di-Cast Aluminum Trim w/ Frosted Lens
- For New Construction or Retrofit Applications
- Suitable for Use in Dry, Damp and Wet Locations
- Suitable for Use in Closets, In Accordance to NEC Guidelines
- Installs on Ceiling and Standard Junction Boxes
- Dimmable to 10% on Compatible TRIAC Dimmers
- 5-Year, 50,000 Hr Warranty
- CEC T24 JA8 Compliant
- NEC Compliant, Suitable for Use in Closet
- Energy Star Certified for 5", 7", 9"

#### Product Warranty\*

5-Year Warranty



50,000 Hrs



\* Standard warranty. Extended warranty available.

Archipelago Lighting, Inc.


| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

[Contact Us](#)



LDLL | Eclipse-II



Project Details





Project Name:

Fixture Schedule:

Project Number:

Notes:

Highlights

Features		Description
5-CCTselect		CCT selectable: 5-way dip-switch
Sensor Ready		Optional plug-n-play motion sensor available on 7" and 9"
TruColor High CRI		Title 24 Compliant. JA8 LED 90CRI+
Limited Warranty		5-Year Warranty

Key Specifications

- Input Voltage: 120V
- Dimming: TRIAC
- Efficacy: ≤103lm/W
- IP: Suitable for Wet Location
- Housing: Die-Cast Aluminum
- Power Factor (PF): >0.9 Non-Flicker
- Operating Temperature: -4°F - 113°F
- Total Harmonic Distortion (THD): <20%
- Beam Angle (°): 120°

Certifications



Model Specifications

Model	Size (in)	Wattage (W)	Lumen (lm)	Efficacy (lm/W)	5-CCTselect (K) <sup>1</sup>	Voltage (V)	CRI
LDLL0510	5"	10W	671lm	67lm/W	2700K	120V	90CRI+
			675lm	68lm/W	3000K		
			698lm	70lm/W	3500K		
			712lm	71lm/W	4000K		
			689lm	69lm/W	5000K		
LDLL0715	7"	15W	1,187lm	79lm/W	2700K		
			1,205lm	80lm/W	3000K		
			1,211lm	81lm/W	3500K		
			1,257lm	84lm/W	4000K		
			1,241lm	83lm/W	5000K		
LDLL0918	9"	18W	1,409lm	78lm/W	2700K		
			1,415lm	79lm/W	3000K		
			1,436lm	80lm/W	3500K		
			1,460lm	81lm/W	4000K		
			1,442lm	80lm/W	5000K		
LDLL1121	11"	21W	2,022lm	96lm/W	2700K		
			2,035lm	97lm/W	3000K		
			2,054lm	98lm/W	3500K		
			2,165lm	103lm/W	4000K		
			2,159lm	103lm/W	5000K		
LDLL1324	13"	24W	2,393lm	100lm/W	2700K		
			2,407lm	100lm/W	3000K		
			2,450lm	102lm/W	3500K		
			2,455lm	102lm/W	4000K		
			2,446lm	102lm/W	5000K		

1. Default settings on CCTselect is highest CCT available.

Archipelago Lighting, Inc.

| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W


Line Item#: 40  
[Go to Bill of Materials](#)

Type: SM3

Powered by 4submittal.com



LDLL | Eclipse-II

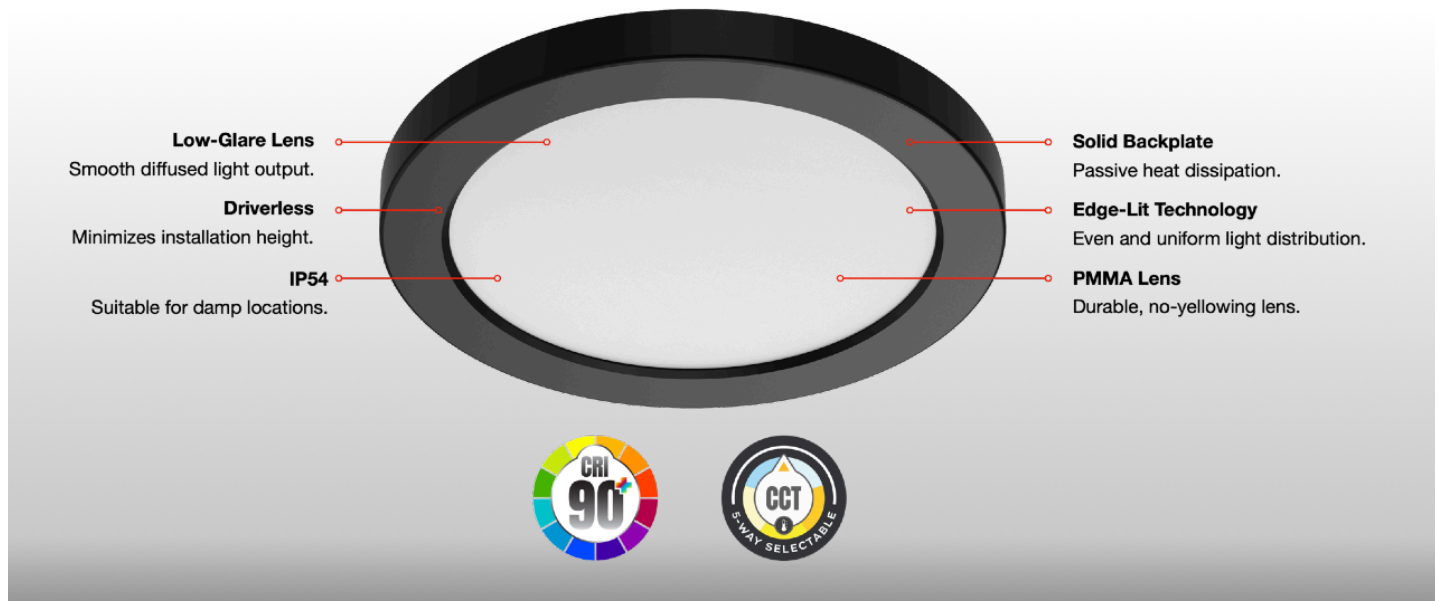

#### Ordering Guide<sup>1</sup>

Model Series	Size (in) / Wattage (W)	Series	CCTselect (K)	Finish Color
<b>LDLL</b> LED Surface Mount Puck Downlight	<b>0510</b> 5inch / 10W <b>0715</b> 7inch / 15W <b>0918</b> 9inch / 18W <b>1121</b> 11inch / 21W <b>1324</b> 13inch / 24W	- <b>E2</b> Eclipse-II	<b>S5</b> 5-CCTselect: 2700K 3000K 3500K 4000K 5000K	/ <b>B</b> Black <b>W</b> White
<b>CATALOG #:</b>				
<b>LDLL</b>		- <b>E2</b>	<b>S5</b>	/

#### Options Guide<sup>2</sup>

EM Driver <sup>3</sup>	Motion Sensor
<input type="checkbox"/> <b>EM15</b> 15W EM Driver <input type="checkbox"/> <b>CRCU</b> 15W EM Driver with Junction Box	<input type="checkbox"/> <b>MSP/W</b> PIR Bi-Level Sensor for 7" and 9" ONLY (White Finish)
<b>OPTIONAL ACCESSORIES #:</b>	

NOTE:

- Only one selection may be applicable within the same category.
- Multiple selections may be applicable within the same option category. See Compatible Accessories below for details.
- EM drivers only work with 7, 9, 11 and 13in fixtures

Archipelago Lighting, Inc.


| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)






+1 (866) 912-3220

	Date: 1/12/2026	<b>Description:</b> LDLL0510-E2S5/W	Line Item#: 40
	Project: FINDLAY FLATS		<a href="#">Go to Bill of Materials</a>
			Type: SM3
Powered by 4submittal.com			



LDLL | Eclipse-II

Sizing & Measurements


Model Series	Dimensions	Overall Diameter (in)	Depth (IN)
LDLL0510-E2		5.51	0.79
LDLL0715-E2		7.48	0.82
LDLL0918-E2		8.86	0.79
LDLL1121-E2		10.98	0.98
LDLL1124-E2		12.80	0.98

Recommended Dimmers

Make	Models			
Lutron	TG-600PR-WH S-600PR-WH CTCL-153PDH-WH	TGCL-153PH-LA SLV-600P-AL DV-600PR-WH	SCL-153PH-WH GT-600P DVCL-153P	MSCL-OP153M MACL-153M//MA-R PD-6WCL
Leviton	6672 IPL06	6674	DSL06	RNL06

Accessories (Standard)

Accessories (Optional)



<b>Mounting Bracket</b>	<b>Wire Nuts</b>	<b>Bolts</b>	<b>15W EM Driver</b>	<b>PIR Bi-Level Sensor</b>
Compatible to 2.75" or 3.50" Junction Box			EM15-HMB/170DC CRCU-EM/JBM	LDLL-E2/MSP/W

Archipelago Lighting, Inc.

| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 40  
[Go to Bill of Materials](#)


Type: SM3


Powered by 4submittal.com



LDLL | Eclipse-II

EM Driver / J-Box (Optional)

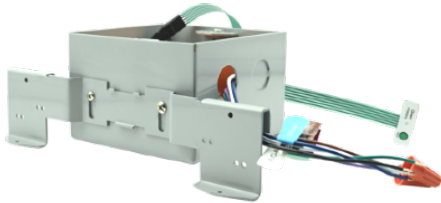

Technical Specification	CRCU-EM/JBM
Emergency Power	15W Max
Installation Method	Recessed
IP Rating	IP20
CEC T.24/JA8 Compliant	Yes
Color Finish	Grey
Physical Features	<ul style="list-style-type: none"><li>Directly connect to AC input</li><li>Fits 2.75" and 3.5" J-Box</li><li>Supports recessed in-ceiling mount</li></ul>
Self-Diagnostic Test Switch	<ol style="list-style-type: none"><li>Emergency conversion kit will go into emergency mode when test switch is pressed while main power is ON.</li><li>Will go into charging mode if test switch is not pressed.</li><li>In emergency mode, pressing the test switch for 3-seconds will inactivate emergency mode.</li></ol>
Indicator Status Light	<ol style="list-style-type: none"><li>Green ON: Charging mode / charging full</li><li>Green OFF: Mains power OFF / discharging mode</li></ol>
Dimension	<p>W4.29in x H2.96</p> 

Archipelago Lighting, Inc.

| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220



Date: 1/12/2026

Project:  
FINDLAY FLATSDescription:  
LED-BPL-2X2-3M40-5CCTLine Item#: 41  
[Go to Bill of Materials](#)


Type: SM8

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## LED Panels: BackLit Line

### 5-CCT & 3-Power Selectable

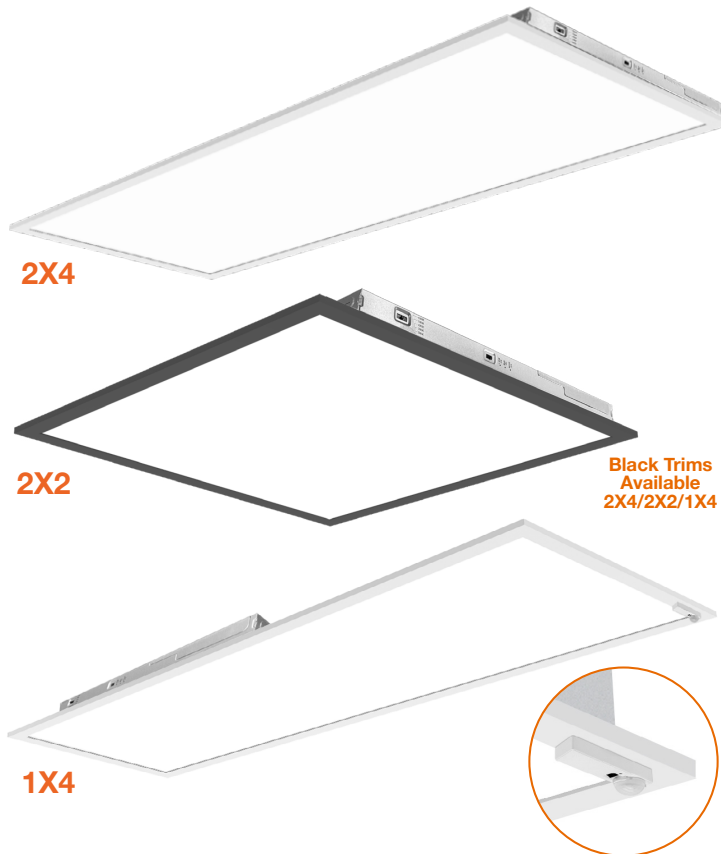Black Trims  
Available  
2X4/2X2/1X4Shown with  
Sensor Option**Regular Versions**

WATT	LUMENS
20	2,200
30	3,300
40	4,400
50	5,500

**HL Versions**

WATT	LUMENS
30	3,750
40	5,000
45	5,625
50	6,250
55	6,875
65	8,125

**Detail Specifications:**

- Finish: White, Custom finishes available
- IP Rating: Damp Location (IP44)
- 5CCT: 30/35/40/50/65K
- Beam Angle: 110°
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 114° F
- Lens: PS (polystyrene) frosted, non-yellowing, & shatter resistant
- Average life (L70) of 50,000 hours
- IC Rated

**Applications:**

- General Indoor Lighting
- Utility & Storage
- Garage Structures
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality
- Commercial and Industrial

**Product Information:**

- Metal housing finished with corrosion free power coat
- Even light distribution
- Lightweight for easier installation
- Select-n-Switch Technology: 5-CCT + 3-Power Selectable
- Control Options:
  - Standard Sensors
  - SILVAIR Bluetooth Mesh
  - ENVISIONLS Bluetooth
  - [Click Here](#) for More Information

**Driver Options:**

- UNV: 120-277V 0-10V Dimmable (Dim to Off)
- Optional 347-480V step down transformer available
- Standard EMB used:
  - 40W: 8W EMB ([LED-EMB-8W-HV-0-10V-2P](#))
  - 50W: 15W EMB ([LED-EMB-15W-HV-0-10V-2P](#))
- Higher wattage emb (up to 25W) available by request. Pricing will vary.
- THD: <15% (+/-5% tolerance), PF >0.9, 50/60Hz
- Isolated Driver
- Flicker Free

**Mounting & Installations:**

- Lay-in ceilings for 5/8" and 3/8" ceiling widths
- Built-in earthquake clips
- Optional 9' suspension kit available
- Optional surface mount, drywall kit available
- Use surface mount and suspension kit for an aesthetically pleasing design

**Certifications:**

- ETL Listed for USA and CA
- DLC Listed/ DLC Premium Listed (HL Versions)
  - View DLC ID Chart below
- NSF Rated
- Approved for CA T24
- 5 Year Limited Warranty

Series	Sensor	Emergency	Driver <sup>1</sup>	Whip
LED-BPL-2X2-3M40-5CCT	(blank)	(blank)	(blank)	(blank)
20/30/40W	No Sensor	No	120-277V	No Whip
LED-BPL-2X2-3M50-5CCT-HL	SR	Emergency	HV	-6FLX
30/40/50W	Sensor Ready	Emergency	347-480V	6' Flex
LED-BPL-2X4-3M50-5CCT	(See sensor options)	Backup	Stepdown	
30/40/50W				
LED-BPL-2X4-3M65-5CCT-HL				
45/55/65W				
LED-BPL-1X4-3M40-5CCT				
20/30/40W				

1. HV: High voltage is made to order.

**Optional Accessories (Order Separately)**

Sensors	Suspension Kits	Surface Mount Kits	Drywall Kits	Color Trims
<b>S-AUD-PIR-1</b> PIR Bi-Level Motion + Daylight Sensor Remote Required: (S-LINE-R)	<b>SK-10FT-Y-LC-CB</b> 10' Suspension Kit	<b>2X2-SM-3"</b> 3" Height	<b>LED-PNL-2X2-FLNG</b> 2x2 Black Trim	<b>BPL-2X2-TRIM-BL</b> 2x2 Black Trim
<b>S-AUD-PIR-BT</b> PIR ENVISIONLS Bluetooth Control	<b>SK-20FT-Y-LC-CB</b> 20' Suspension Kit	<b>2X4-SM-3"</b> 3" Height	<b>LED-PNL-1X4-FLNG</b> 1x4 Black Trim	<b>BPL-2X4-TRIM-BL</b> 2x4 Black Trim
<b>S-AUD-PIR-SL</b> PIR SILVAIR Bluetooth Mesh	<b>CK-6FT-V</b> 6' Chain Hanging Kit	<b>1X4-SM-3"</b> 3" Height		<b>BPL-1X4-TRIM-BL</b> 1x4 Black Trim

1. Custom height options available. Contact us.

Specs and model numbers are subject to change with or without notice. Customization of product is available.

**EnVision LED Lighting, Inc.**6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 12.24



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-BPL-2X2-3M40-5CCT

Line Item#: 41  
[Go to Bill of Materials](#)

Type: SM8


Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM


## LED Panels: BackLit Line

5-CCT & 3-Power Selectable

### FEATURES

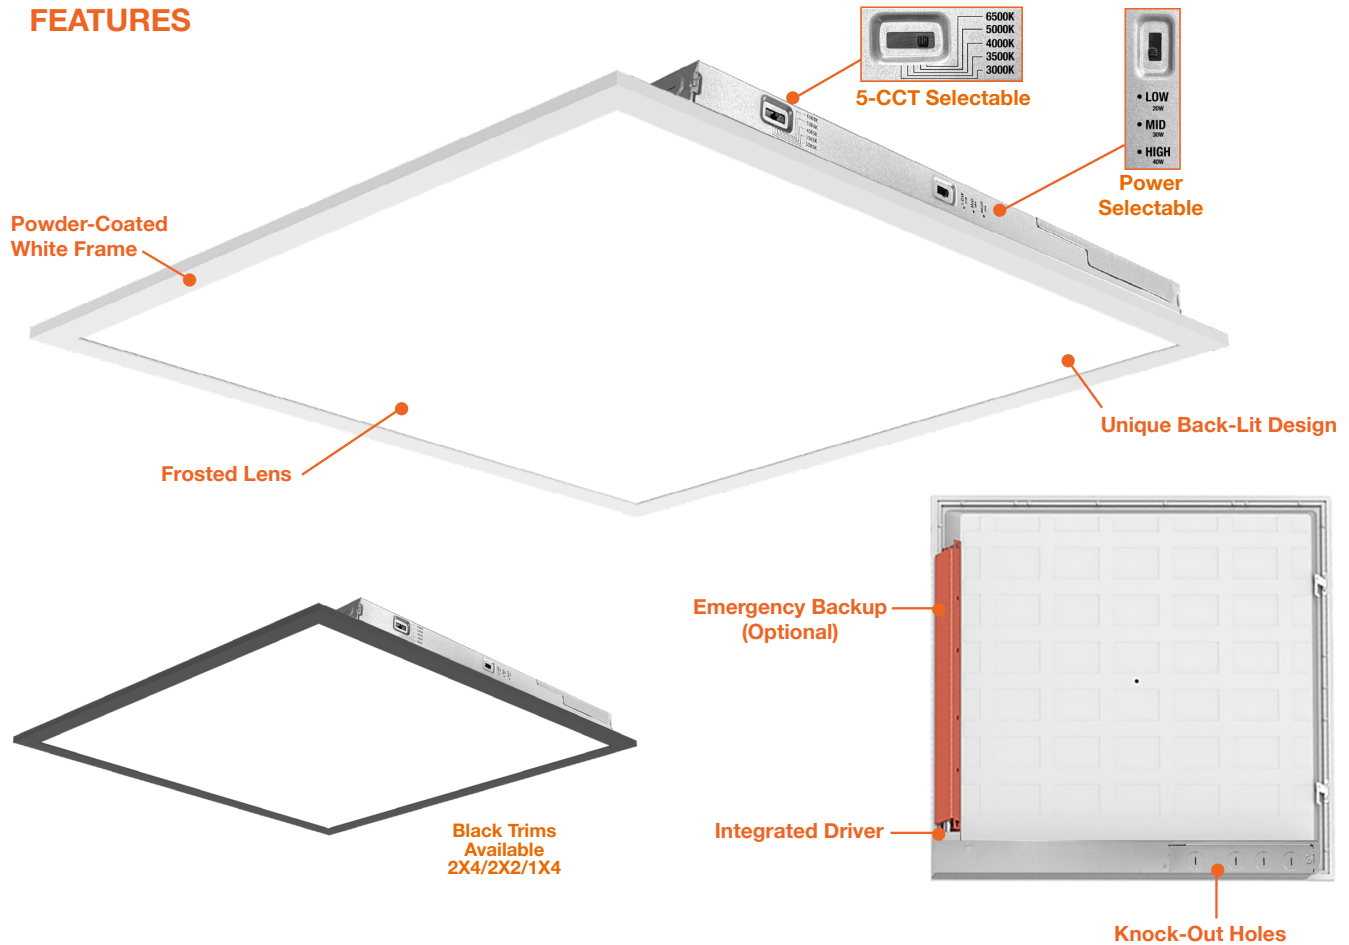

### DIMENSIONS

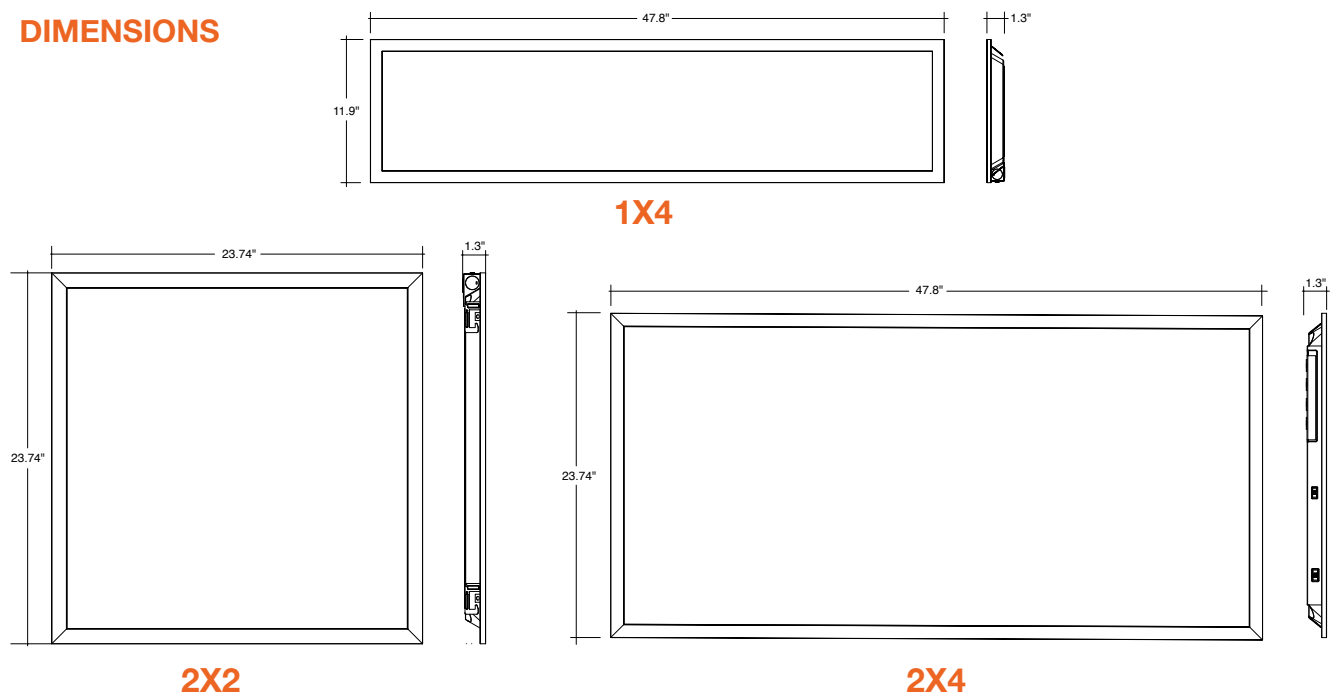





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-BPL-2X2-3M40-5CCT

Line Item#: 41  
[Go to Bill of Materials](#)

Type: SM8

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## LED Panels: BackLit Line 5-CCT & 3-Power Selectable

### ACCESSORIES






SK-10FT-Y-LC-CB  
SK-20FT-Y-LC-CB



CK-6FT-V



S-AUD-PIR-1  
S-AUD-PIR-BT  
S-AUD-PIR-SL

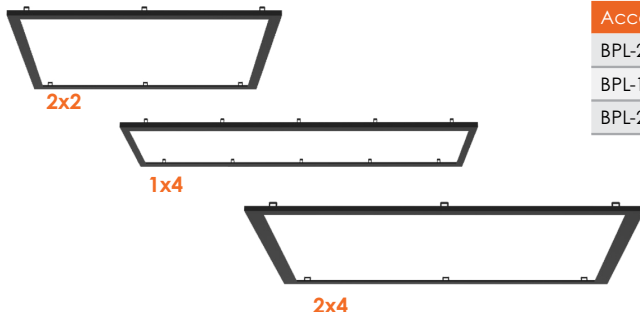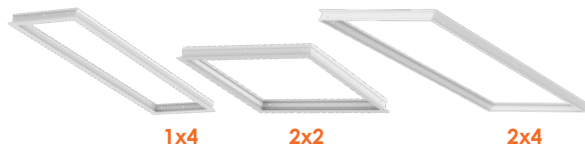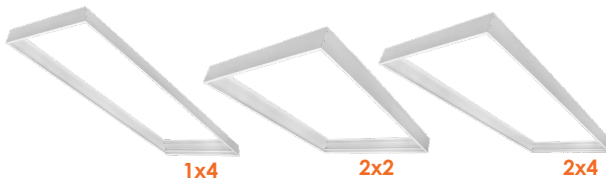

Model	Voltage	Watts	Lumens	Color	CRI
LED-BPL-2X2-3M40-5CCT	120/277V	20/30/40w	2600/3900/4400	30/35/40/50/65k	>80
LED-BPL-2X2-3M50-5CCT-HL	120/277V	30/40/50w	3900/4400/5500	30/35/40/50/65k	>80
LED-BPL-2X4-3M50-5CCT	120/277V	30/40/50w	3900/4400/5500	30/35/40/50/65k	>80
LED-BPL-2X4-3M65-5CCT-HL	120/277V	45/55/65w	5625/6875/8125	30/35/40/50/65k	>80
LED-BPL-1X4-3M40-5CCT	120/277V	20/30/40w	2600/3900/4400	30/35/40/50/65k	>80

### SUSPENSION KITS

Accessory	Description
SK-10FT-Y-LC-CB	10' Suspension Kit
SK-20FT-Y-LC-CB	20' Suspension Kit
CK-6FT-V	6' Chain Hanging Kit
LED-PNL-2X4-SK	3.5' Suspension Kit, works for all sizes

### SENSORS

Accessory Model	Description
S-AUD-PIR-1	PIR Bi-Level Motion + Daylight Sensor Remote Required: (S-LINE-R)
S-AUD-PIR-BT	PIR ENVISIONLS Bluetooth Control
S-AUD-PIR-SL	PIR SILVAIR Bluetooth Mesh

### SURFACE MOUNT KITS

Accessory	Description
2X2-SM-3"	2X2 Surface Mount Kit 3" Height for all Panels and Troffers
2X4-SM-3"	2X4 Surface Mount Kit 3" Height for all Panels and Troffers
1x4-SM-3"	1X4 Surface Mount Kit 3" Height for all Panels and Troffers

### DRYWALL KITS

Accessory	Description
LED-PNL-2X2-FLNG	Flange (Drywall) Kit for Panels for all 2X2 Fixtures
LED-PNL-2X4-FLNG	Flange (Drywall) Kit for Panels for all 2X4 Fixtures
LED-PNL-1X4-FLNG	Flange (Drywall) Kit for Panels for all 1X4 Fixtures

### TRIMS


Accessory	Description
BPL-2X2-TRIM-BL	2x2 LED Panel: Backlit-Line Black Trim
BPL-1X4-TRIM-BL	1x4 LED Panel: Backlit-Line Black Trim
BPL-2X4-TRIM-BL	2x4 LED Panel: Backlit-Line Black Trim

Luminaires for Ambient Lighting of - DLC Product ID:

LED-BPL-2x2-3M40-5CCT	S-IMBE52 (Standard)
LED-BPL-2x4-3M50-5CC	S-U0267J (Standard)
LED-BPL-1x4-3M40-5CCT	S-DR8V2E (Standard)
LED-BPL-2x2-3M50-5CCT-HL	S-V26054 (Standard)
LED-BPL-2x4-3M65-5CCT-HL	S-WNV8KG (Premium)

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

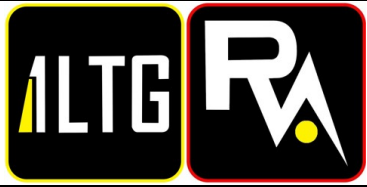

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-BPL-2X2-3M40-5CCT









Line Item#: 41  
[Go to Bill of Materials](#)

Type: SM8


Powered by 4submittal.com

## EnVisionLED™ Control Options

EnVision LED offers 3 control systems compatible with our LED Fixtures for projects of all sizes and budgets.

	Basic Controls	EnVisionLS 	EnVisionLED™ x SILVAIR 
<b>Description</b>	Standard Plug In Sensors	Basic Bluetooth Wireless Control	Advanced Bluetooth Wireless Control
<b>Recommended Quantity</b> (but not limited to)	N/A	>40-50 Nodes	>50 Nodes
<b>Maximum Zone Quantity</b>	N/A	100	3,000
<b>Commissioning Tool</b>	Remote Only	  ENVISIONLS App 	  SILVAIR App 
<b>Commissioning Process</b>	Individually Set via Remote	Wireless Must be done on site	Wireless- Initial linking must be done on site. Commissioning can be done via desktop remotely.
<b>Floor Plan Upload</b>	N/A	N/A	Yes Add a floor plan and mark luminaires & zones via desktop
<b>Gateway</b>	N/A	N/A	Required only for energy monitoring, advanced scheduling, automated demand response.
<b>Individual Luminaire Control</b>	Yes	Yes	Yes
<b>Luminaire Grouping Zoning</b>	N/A	Yes	Yes
<b>High End Power Low End Power</b>	Yes but limited (View Remote)	Yes	Yes
<b>Cost</b>	\$	\$\$	\$\$\$
<b>DLC NLC Listed</b>	N/A	Yes	Yes
<b>Energy Monitoring &amp; Data Reporting</b>	N/A	N/A	Monitor energy usage per individual zone & retrofit cost savings calculation + detailed reporting



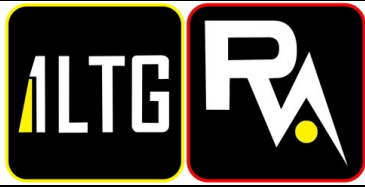

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-BPL-2X2-3M40-5CCT

Line Item#: 41  
[Go to Bill of Materials](#)

Type: SM8

Powered by 4submittal.com





## Compatible Products:

EnVision offers a variety of nodes, sensors, & gateways that are controlled via remote, ENVISIONLS Bluetooth Mesh & SILVAIR Bluetooth Mesh on all of our 0-10V dimmable fixtures.






### Individual Fixture Controls: PIR Sensor, Bi-Level Dimming, Daylight


Basic Note: -1 • ENVISIONLS Models Note: -BT • SILVAIR Models Note: -SL

	MODEL #	DESIGN	RECOMMENDED FIXTURE	FEATURES
	S-TWC-PIR-1 S-TWC-PIR-BT S-TWC-PIR-SL	Twist-C Control Sensor	Sensor Ready Fixtures: Area Lights, Canopies, Flood Lights, High Bays	All models are equipped with PIR occupancy sensing, high & low end bi-level dimming, & daylight sensing.
	S-TWC-90 + S-TWC-PIR-1 S-TWC-90 + S-TWC-PIR-BT S-TWC-90 + S-TWC-PIR-SL	Twist-C Control Sensor + 90 Degree Arm	Cylinders, Strips, Wall Packs	
	S-AUD-PIR-1 S-AUD-PIR-BT S-AUD-PIR-SL	2.5m Audio Jack	Panels & Troffers	
	S-SN-PIR-1 S-SN-PIR-BT S-SN-PIR-SL	Snap In Sensor	Troffers & Wraps	

### Group Controls ENVISIONLS Models Note : -BT • SILVAIR Models Note: -SL

	MODEL #	DESIGN	VOLTAGE	FEATURES	RECOMMENDED FEATURES
	S-CM-PIR-LV-BT S-CM-PIR-LV-SL	Ceiling Mounted PIR Sensor	12-24V	PIR Sensor, Bi-Level Dimming, Daylight, 360° detection, 12' Max Mounting Height	Connects to 0-10V dimmable fixtures
	S-WM-PIR-CUNV-BT S-WM-PIR-CUNV-SL	Wall Mounted PIR Occupancy Sensor, Bi-Level Dimming, Daylight	120-277V	On/Off PIR occupancy sensor, 180° detection, 30' detection @ 4' Mounting Height	Connects to LED fixtures
	S-WS-120V-USB-SL		120V	Dimming Wall Socket, Two Sockets	Floor Lamps, Other Lamps

### Gateway (Silvaire Only) 4.5–5.5 V DC, 2A Power over Ethernet 36–57 V DC

	MODEL #	DESIGN	VOLTAGE	FEATURES	RECOMMENDED FEATURES
	SGW-102	Wall or Ceiling Mounted	POE	Advanced Energy Monitoring Control	Connects to Silvaire Controls. Gateway is not required.



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
SM56885FTSN

Line Item#: 42  
[Go to Bill of Materials](#)

Type: SM13

Powered by 4submittal.com


Essentials - 588x | SM56885FTSN

Job Name: Job Type: Quantity: Comments:



#### PRODUCT DESCRIPTION

Maxim Lighting's commitment to both the residential lighting and the home building industries will assure you a product line focused on your lighting needs. With Maxim Lighting you will find quality product that is well designed, well priced and readily available.



#### MEASUREMENTS

DIMENSION : 9" L x 9" W x 5" H  
HANGING WEIGHT : 2.18 lb

#### LAMPING

INPUT VOLTAGE : 120V  
BULB : 60W Incandescent E26 Medium , 120W Total  
BULB INCLUDED : (Not Included)  
DIMMABLE : Yes

#### FINISHES OPTION

Oil Rubbed Bronze (OI)  
 Satin Nickel (SN)

#### GLASS

Frosted FT

#### MATERIAL

Glass, Steel

#### RATINGS

cETLus  
Damp Location



#### ADDITIONAL

OPERATING TEMPERATURE:  
-20°C (-4°F), 40°C (104°F)

Always consult a qualified electrician before installing any lighting product.

# STUDIO•M

Modifications or Customizations: Please email [contract@studiomlighting.com](mailto:contract@studiomlighting.com)

Sample Request: Please email [order@studiomlighting.com](mailto:order@studiomlighting.com) with subject line

"Sample Order, [Project Name] / [Specifier/Designer]"

All samples are subject to Studio M approval and must show proof of project and/or explanation.

Job Name:	Job Type:
Quantity:	Comments:

StudioMlighting.com - 1.626.956.4209



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-A19-9W-5CCT

Line Item#: 43  
[Go to Bill of Materials](#)

Type: SM13 LAMP

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

Project: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_

LED Bulbs



## A Bulb SERIES: 5-CCT LED BULBS



### A-19, A-21



A-19



A-21



#### Detail Specifications

- IP Rating: Damp Location
- Beam Angle: 220°
- 5-CCT: 27/30/35/40/50K
- Chip: SMD 2835, R9 >50, CRI >90
- Operating Temperature: -4° - 114° F
- Average life (L70) of 25,000 hours

#### Applications:

- Decorative Lighting
- Interior Lighting
- Table & Floor Lamps
- Showcases
- Residential, Multi-Family, Commercial

#### Product Information:

- Suitable for use in existing fixtures
- Instant-On to full brightness

#### Driver Options:

- 120V
- Triac Dimmable
- PF >0.9, 50/60Hz

#### Mounting & Installation:

- E26 Socket
- Direct A Lamp Replacement

#### Packaging:

- All bulbs come in individual color boxes, but are sold in inner carton qty packs only

Carton Qty.	A-19	A-21
Inner Carton	10	10
Master Carton	100	100

#### Certifications:

- ETL Listed for USA and CA
- Energy Star
- Title 20 and JA8-2022 Approved
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

#### Dimmer List:

Leviton	6674
Lutron	LGCL-153P
Lutron	DVCL-153P
Lutron	CTCL-153P
Lutron	MAELV-300

#### Series

**LED-A19-9W-5CCT**

600 Lumens 60W Equivalent

**LED-A21-15W-5CCT**

1,600 Lumens 100W Equivalent

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 10.23



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
TS3-8FT-SM-WH

Line Item#: 44  
Go to Bill of Materials


Type: TL1

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## Linear Track & Accessories

### 3-Wire Single Circuit



	LENGTH	WIDTH	HEIGHT
TS3-2FT-SM 2' Nominal	24"	1 3/8"	1 1/16"
TS3-4FT-SM 4' Nominal	48"	1 3/8"	1 1/16"
TS3-8FT-SM 8' Nominal	96"	1 3/8"	1 1/16"



#### Item

##### TS3-2FT-SM-WH

White

##### TS3-2FT-SM-BL

Black

##### TS3-4FT-SM-WH

White

##### TS3-4FT-SM-BL

Black

##### TS3-8FT-SM-WH

White

##### TS3-8FT-SM-BL

Black

#### Accessories

##### TS3-SM-LIVE-WH

Live End: Required to start a run

##### TS3-SM-LIVE-BL

Live End: Required to start a run

##### TS3-SM-END-WH

End Cap: Required to end a run

##### TS3-SM-END-BL

End Cap: Required to end a run

##### TS3-SM-MJ-WH

Mini Joiner: Low profile joiner

for two straight track sections

##### TS3-SM-MJ-BL

Mini Joiner: Low profile joiner

for two straight track sections

##### TS3-SM-SC-WH

Straight Connector: Connect two track

sections end to end with a center

feed option

##### TS3-SM-SC-BL

Straight Connector: Connect two track

sections end to end with a center

feed option

##### TS3-SM-L-WH

L-Connector: Connect two track

sections at a right angle

##### TS3-SM-L-BL

L-Connector: Connect two track

sections at a right angle

Project: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_

#### Track Lights



#### Detail Specifications:

- Finish: White, Black
- Dry Location Rated
- 3-Wire
- Single Circuit
- Voltage: 120V

#### Applications:

- General Track Lighting
- Residential & Multifamily
- Art Galleries, Museums
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality

#### Product Information:

- End cap included with each track
- Extruded aluminum housing
- Solid copper conductor
- Interchangeable beam angles
- Multiple accessories available

#### Mounting & Installations:

- Compatible with H-Type single circuit track system
- Surface Mount Use

#### Certifications:

- ETL Listed for USA and CA

Specs and model numbers are subject to change with or without notice. Customization of product is available.

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | www.envisionledlighting.com

Rev. 10.23





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
TS3-8FT-SM-WH

Line Item#: 44  
[Go to Bill of Materials](#)

Type: TL1

Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Linear Track & Accessories


### 3-Wire Single Circuit

#### TRACK ACCESSORIES



**TS3-SM-LIVE-WH**  
**TS3-SM-LIVE-BL**

Live End: Required to start a run



**TS3-SM-END-WH**  
**TS3-SM-END-BL**

End Cap: Required to end a run



**TS3-SM-MJ-WH**  
**TS3-SM-MJ-BL**

Mini Joiner: Low profile joiner for two straight track sections



**TS3-SM-SC-WH**  
**TS3-SM-SC-BL**

Straight Connector: Connect two track sections end to end with a center



**TS3-SM-L-WH**  
**TS3-SM-L-BL**

L-Connector: Connect two track sections at a right angle




**TS3-SM-T-WH**  
**TS3-SM-T-BL**

T-Connector: Connect two track sections at a T angle



**TS3-SM-X-WH**  
**TS3-SM-X-BL**

X-Connector: Connect two track sections at an cross angle



**TS3-SM-FLX-WH**  
**TS3-SM-FLX-BL**

Flexible Connector: Connect two track sections at any angle up to 90°



**TS3-SM-FC-WH**  
**TS3-SM-FC-BL**

Floating Canopy: Track can be connected to existing outlet box along the track.





Date: 1/12/2026

Project:  
FINDLAY FLATSDescription:  
LED-ATH-10W-5CCT-30D-WHLine Item#: 45  
[Go to Bill of Materials](#)Type: TRACK  
HEAD

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## ARCY-Line: Track Heads

### COB 5-CCT Selectable



#### Track Lights



#### Detail Specifications:

- Finish: White, Black
- Damp Location Rated
- Chip: High Lumen COB, R9 >50, CRI >90
- 2 Step MacAdam Ellipses
- Operating Temperature: -40° - 114° F
- Lens: PMMA Clear Lens
- Average life (L70) of 50,000 hours

#### Applications:

- General Track Lighting
- Residential & Multifamily
- Art Galleries, Museums
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality

#### Product Information:

- Metal housing and trim for better heat dissipation
- 350° Horizontal Rotation, 90° Vertical Rotation
- Interchangeable beam angles
- For use with H-Type track or surface mount installation
- Select-n-Switch Technology: 5-CCT
- Instant-On to full brightness

#### Driver Options:

- Voltage: 120V
- Triac Dimmable Down to 5%
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz
- Built in 2.5Kv Surge Protector
- Flicker Free

#### Mounting & Installation:

- Compatible with H-Type single circuit track system
- Surface mount accessory option available for 3/40 J-Box

#### Certifications:

- ETL Listed for USA and CA
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017
- IC Rated and ASTM-E283 Air-Tight
- Complies with UL 263, ASTM E119, CAN ULC S101


Series	Beam Angles	Finish	Mounting
LED-ATH-10W-5CCT 10W • 1,000lm	30D <sup>1</sup> 30°	WH White	(Blank) H-Type Track
LED-ATH-20W-5CCT 20W • 2,000lm	36D <sup>1</sup> 36°	BLK Black	SM Surface Mount
LED-ATH-30W-5CCT 30W • 3,000lm	24D 24° 60D 60°		
<sup>1</sup> • 30D standard on 10W. • 36D standard on 20W & 30W. • 24D & 60D available for all sizes			

#### Optional Accessories (Order Separately)

Optic Lens	Surface Mount	Emergency Backup <sup>1</sup> (field install)
ATH-10W-24D 24° Beam Angle ATH-10W-60D 60° Beam Angle ATH-20W-24D 24° Beam Angle ATH-20W-60D 60° Beam Angle ATH-30W-24D 24° Beam Angle ATH-30W-60D 60° Beam Angle	ATH-SM Surface Mount for 30/40 Jbox	LED-EMB-15W-HV-0/10V-2P Up to 14W fixtures LED-EMB-25W-HV-0/10V-2P Up to 24W fixtures
		<sup>1</sup> Field installable. Lasts 90 minutes.

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

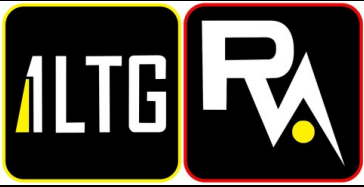

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-ATH-10W-5CCT-30D-WH

Line Item#: 45  
[Go to Bill of Materials](#)

Type: TRACK  
HEAD





Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## ARCY-Line: Track Heads


### COB 5-CCT Selectable

#### FEATURES

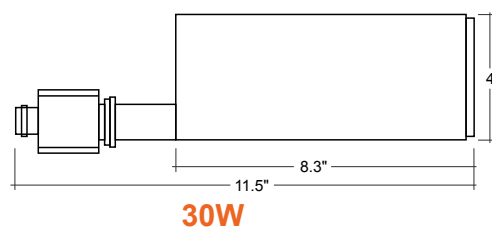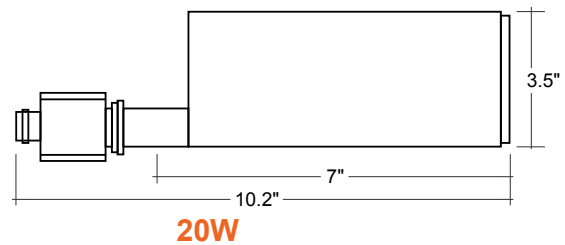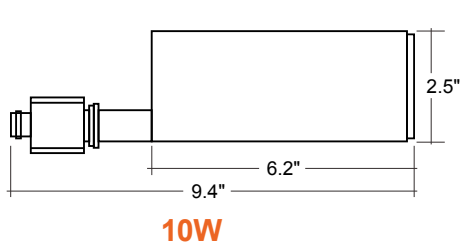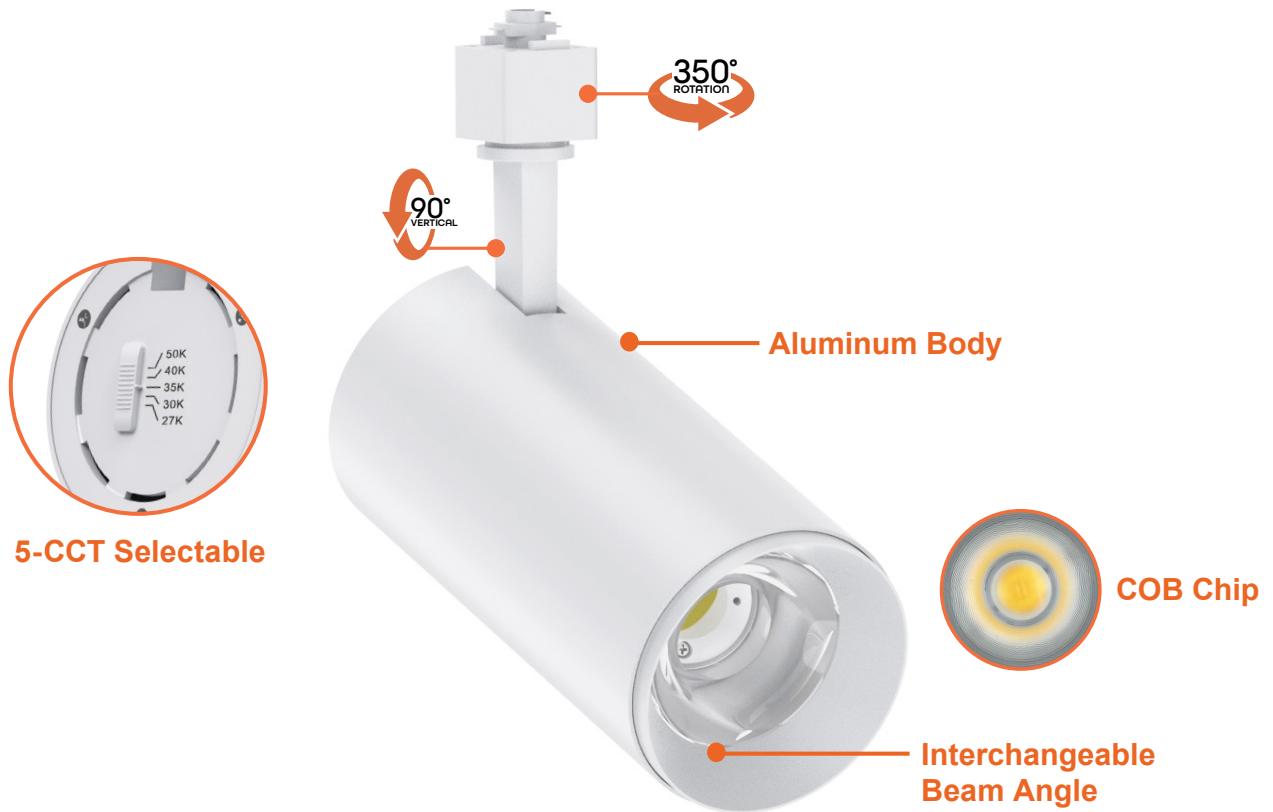

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

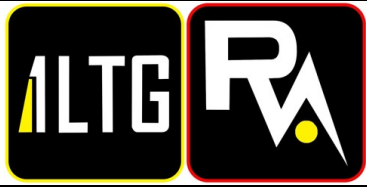

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-ATH-10W-5CCT-30D-WH

Line Item#: 45  
[Go to Bill of Materials](#)

Type: TRACK  
HEAD

Powered by 4submit.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## ARCY-Line: Track Heads

### COB 5-CCT Selectable

#### ACCESSORIES



LENS

ATH-SM

#### QUICK SHIP MODELS

Model	Voltage	Watts	Lumens	Color	CRI
LED-ATH-10W-5CCT-30D-WH	120V	10w	1000	27/30/35/40/50K	>90
LED-ATH-10W-5CCT-30D-BLK	120V	10w	1000	27/30/35/40/50K	>90
LED-ATH-20W-5CCT-36D-WH	120V	20w	2000	27/30/35/40/50K	>90
LED-ATH-20W-5CCT-36D-BLK	120V	20w	2000	27/30/35/40/50K	>90
LED-ATH-30W-5CCT-36D-WH	120V	30w	3000	27/30/35/40/50K	>90
LED-ATH-30W-5CCT-36D-BLK	120V	30w	3000	27/30/35/40/50K	>90

#### OPTIC LENS

Model	Description
ATH-10W-24D	Track Heads: ACRY-Line 24D Optic
ATH-10W-60D	Track Heads: ACRY-Line 60D Optic
ATH-20W-24D	Track Heads: ACRY-Line 24D Optic
ATH-20W-60D	Track Heads: ACRY-Line 60D Optic
ATH-30W-24D	Track Heads: ACRY-Line 24D Optic
ATH-30W-60D	Track Heads: ACRY-Line 60D Optic

#### SURFACE MOUNT

Accessory	Description
ATH-SM	Surface Mount for 30/40 Jbox

#### BATTERY BACK-UP

Accessory	Description
LED-EMB-15W-HV-0/10V-2P	Up to 14W fixtures
LED-EMB-25W-HV-0/10V-2P	Up to 24W fixtures


#### TESTED COMPATIBLE DIMMERS

Other dimmers may be compatible but have not been tested.  
Please contact us for more information.

Lutron	Leviton	Toshiba	Panasonic
DVCL-153P	6674	WDG9001	WN575149
SCL-153P			
LGCL-153P			
MACL-153M			
MSCL-OP153M			
S-600P			
AYCL-153			
DV-600P			

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

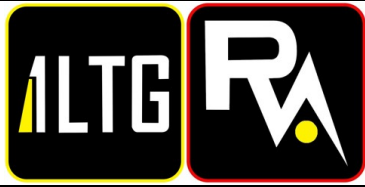

Date: 1/12/2026

Project:  
FINDLAY FLATSDescription:  
LED-CYE-UD-3-3P30-TRI-BL-PCLine Item#: 47  
[Go to Bill of Materials](#)

Type: WM1

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COMProject: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_

Area Lights



## M-Line: 3" Edge-Lit Cylinder Up/Down Light

3-CCT w/ Photocell



WATT	LUMENS
10	1,200
20	2,400
30	3,600

**Detail Specification:**

- Finish: Bronze, Black, White
- IP Rating: Wet Location IP65
- Beam Angle: 60°
- CCT: 30/40/50K Selectable
- Wattage: 30/20/10w
- Lumens: 3,600
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 122° F
- BUG: B2-U2-G2
- Lens: Clear glass with optics
- Average life (L70) of 50,000 hours

**Applications:**

- Dock and Loading
- Walkways & Pathways
- Parking Lots
- Hospitality, Multi-Family
- Outdoor Corridors
- General Outdoor Lighting
- Residential, Commercial and Industrial

**Product Information:**

- Sturdy die-cast aluminum housing finished with corrosion free powder coat
- Photocell included on each fixture. Easy disconnect.
- 1.5' STJW 18.3 AWG cable whip included
- Illuminates up and down and edge
- Select-n-Switch Technology: 3-CCT Selectable + 3-Power Selectable
- Instant-On to full brightness

**Driver Options:**

- UNV: 120-277V 0-10V Dimmable
- Built in 6Kv Surge Protector
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz

**Mounting & Installation:**

- Mounts to 3 or 4" J-box
- Covers a standard 4" recessed j-box

**Certifications:**


- UL Listed for USA and CA
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

**Series****LED-CYE-UD-3-3P30-TRI -**  
3" Up/Down Cylinder • 30/20/10W**Finish****BZ**  
Bronze  
**WH**  
White  
**BL**  
Black**Photocell****PC**  
Photocell  
is included.  
Easy quick  
disconnect.  
(PC-3/4-3PIN-LV)

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 10.23

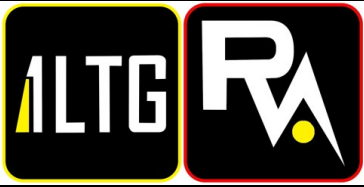

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-CYE-UD-3-3P30-TRI-BL-PC

Line Item#: 47  
[Go to Bill of Materials](#)

Type: WM1

Powered by 4submit.com


**EnVisionLED**<sup>TM</sup>  
WWW.ENVISIONLEDLIGHTING.COM

## M-Line: 3" Edge-Lit Cylinder Up/Down Light 3-CCT w/ Photocell

### FEATURES




### DIMENSIONS

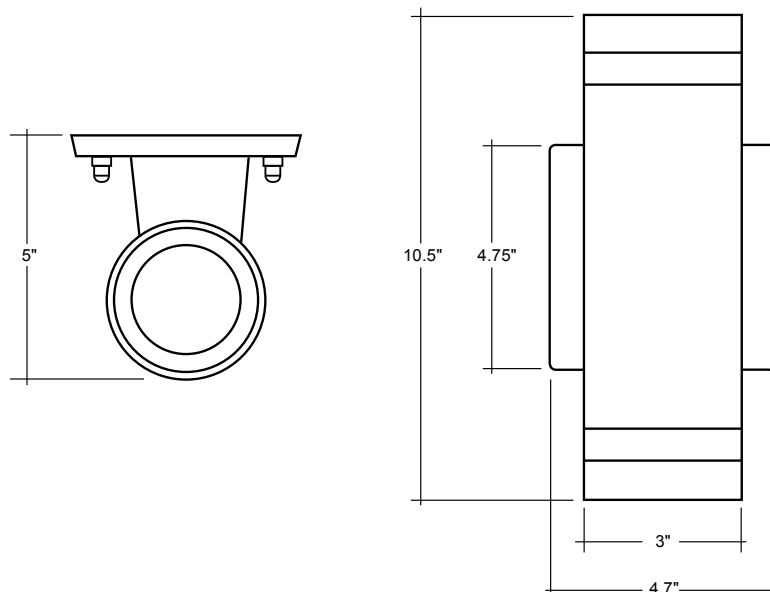

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

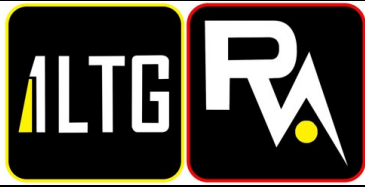

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-VT-ADJ-24-21W-5CCT-BN

Line Item#: 48  
[Go to Bill of Materials](#)


Type: V1

Powered by 4submittal.com

**EnVisionLED**<sup>TM</sup>  
WWW.ENVISIONLEDLIGHTING.COM

## Vanity Fixtures

### Square Adjustable Swivel

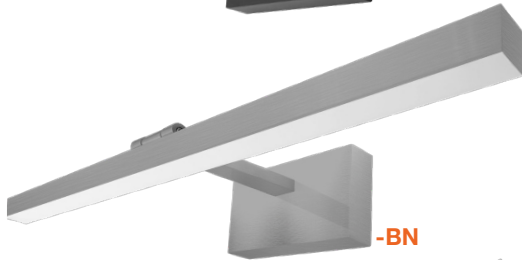

FRONT VIEW



90° Rotatable Angle

Vanity Fixture



#### Detail Specifications:

- Power: 21W
- Lumens: 2,700
- Finishes: Black, Brushed Nickel, Chrome
- IP Rating: IP54 Damp Location
- Beam Angle: 100°
- Chip: SMD 2835, R9 >50, CRI >90
- Operating Temperature: -40° - 114° F
- Lens: Frosted Acrylic, non-yellowing
- Average life (L70) of 50,000 hours

#### Applications:

- Bathrooms & Lavatories
- Hallways & Corridors
- Artwork, Museums
- Residential & Multifamily
- Education, Healthcare, Retail, Hospitality

#### Product Information:

- Available in 23.6" length
- Adjustable Angle: Lens swivels up and down
- Wide j-box for easier installation in retrofit and new construction applications
- Select-n-Switch Technology: 5-CCT Selectable

#### Driver Options:

- Triac & ELV dimmable down to 5%
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz
- Built in 2.5Kv Surge Protector
- Flicker Free

#### Mounting & Installations:

- 30/40 Junction Box
- Surface mount bracket included

#### Certifications:

- ETL Listed for USA and CA
- CA Title 24 JA8-2022 CEC Listed
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

#### Series

LED-VT-ADJ-24-21W-5CCT-BL

Black

LED-VT-ADJ-24-21W-5CCT-BN

Brushed Nickel

LED-VT-ADJ-24-21W-5CCT-CH


Chrome

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 04.25

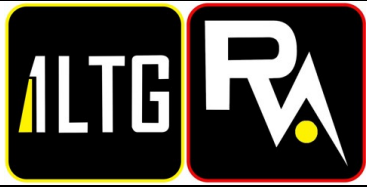

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-VT-ADJ-24-21W-5CCT-BN

Line Item#: 48  
[Go to Bill of Materials](#)

Type: V1

Powered by 4submit.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM


## Vanity Fixtures

### Square Adjustable Swivel

#### FEATURES




90° Rotatable Angle



5-CCT Selectable

#### MEASUREMENTS

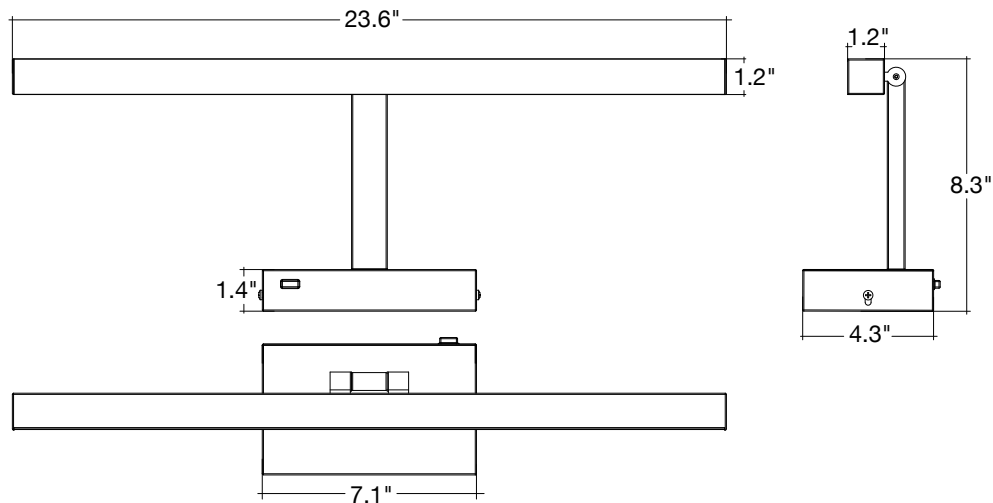

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)





Date: 1/12/2026

Project:  
FINDLAY FLATSDescription:  
LED-RST-4FT-3M40W-4CCT-SRLine Item#: 49  
[Go to Bill of Materials](#)

Type: ST1

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## Round LED Strip Fixtures

### 5-CCT & 3-Power Selectable

### Sensor Ready

Project: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_

Strips

**Detail Specification:**

- Finish: White, Custom finishes available
- IP Rating: Damp Location (IP44)
- Beam Angle: 130°
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 122° F
- Lens: Round Acrylic Frosted Lens
- Average life (L70) of 50,000 hours

**Applications:**

- Stairwell & Hallways
- Utility & Storage
- Garage Structures
- Office and Meeting Rooms
- Shop Lighting
- Commercial and Industrial

**Product Information:**

- Aluminum housing finished with corrosion free power coat
- Easy j-box access: snap on and off tool-less design
- 40 J-box cover included with every fixture
- Audio Jack Sensor Ready (with RST-SR bracket)
- Sensor Options:
  - Standard Sensors
  - SILVAIR Bluetooth Mesh
  - ENVISIONLS Bluetooth
  - [Click Here](#) for More Information

**Driver Options:**

- UNV: 120-277V 0-10V Dimmable
- Optional 347-480V step down transformer available
- THD: <15% (+/-5% tolerance), PF >0.9, 50/60Hz
- 12V low voltage aux output for controls
- Flicker Free

**Mounting & Installation**

- Surface mount into 30 or 40 j-box
- Optional 10' & 20' suspension kit available
- Optional 6' chain mount available
- Rated for installation in closets

**Certifications**

- UL Listed for USA and CA
- DLC Premium Listed
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

3M25W		3M40W		3M60W		3M80W		3M100W	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
15	2,100	20	2,600	40	5,200	50	6,500	70	9,100
20	2,800	30	3,900	50	6,500	65	8,450	85	11,050
25	3,500	40	5,200	60	7,800	80	10,400	100	13,000

Series	Sensor <sup>1</sup>	Emergency <sup>2</sup>	Finish <sup>3</sup>	Flex
LED-RST-2FT-3M25W-5CCT-SR	(Blank)	(Blank)	(Blank)	(Blank)
LED-RST-4FT-3M40W-5CCT-SR	No Sensor	No Emergency	White	No Flex
LED-RST-4FT-3M80W-5CCT-SR	BMS <sup>1</sup>	Backup	BL	6FLX
LED-RST-8FT-3M60W-5CCT-SR	Microwave	EMB	Black	6' Flex
LED-RST-8FT-3M100W-5CCT-SR	Bi-Level Motion	Emergency	GRY <sup>3</sup>	Whip
	+ Daylight Sensor	Backup	Gray	
	(Internal Sensor)	EMB20	BRZ <sup>3</sup>	
	BMSPIR	Emergency	Bronze	
	Available for field install.	Backup (20W)	CS <sup>3</sup>	
			Custom Color	

1. Sensor Note:  
Microwave: Detects motion through barriers such as walls, and doors. Ideal for applications where obstacles might obstruct the line of sight. Works effectively outdoors, in large open spaces, & parking lots. Do not use in areas of high vibrations or metal.  
PIR: Ideal for indoor environments with clear lines of sight to the area of interest. Detects warm objects, like a person or animal. Good for high vibration, areas of metal.

2. Standard emergency is 8W (1,040LM). 20W available, inquire factory

3. Standard quick ship finish is white & black. Other colors are custom finishes.


**Optional Accessories (Order Separately)**

Sensors	Suspension Kit	Accessories	Wire Guards
<b>RST-SR</b> Receptacle for Sensor (Required for below sensors)	<b>SK-10FT-Y-LC-PD</b> 10' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)	<b>RST-SM-CN</b> Surface mount linkable bracket	<b>RST-2FT-WG</b> 2ft Wire Guard
<b>S-AUD-PIR-1</b> PIR Bi-Level Motion + Daylight Sensor Remote Required: (S-LINE-R)	<b>SK-20FT-Y-LC-PD</b> 20' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)	<b>RST-PDM-CN</b> Pendant mount linkable bracket	<b>RST-4FT-WG</b> Wire Guard (order 2 for 8ft fixtures)
<b>S-AUD-PIR-BT</b> PIR ENVISIONLS Bluetooth Control			
<b>S-AUD-PIR-SL</b> PIR SILVAIR Bluetooth Mesh			

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 10.25

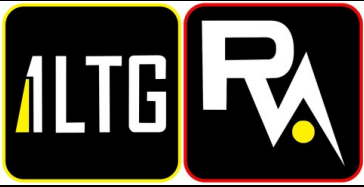

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-RST-4FT-3M40W-4CCT-SR

Line Item#: 49  
[Go to Bill of Materials](#)

Type: ST1


Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM


## Round LED Strip Fixtures


### 5-CCT & 3-Power Selectable

#### FEATURES

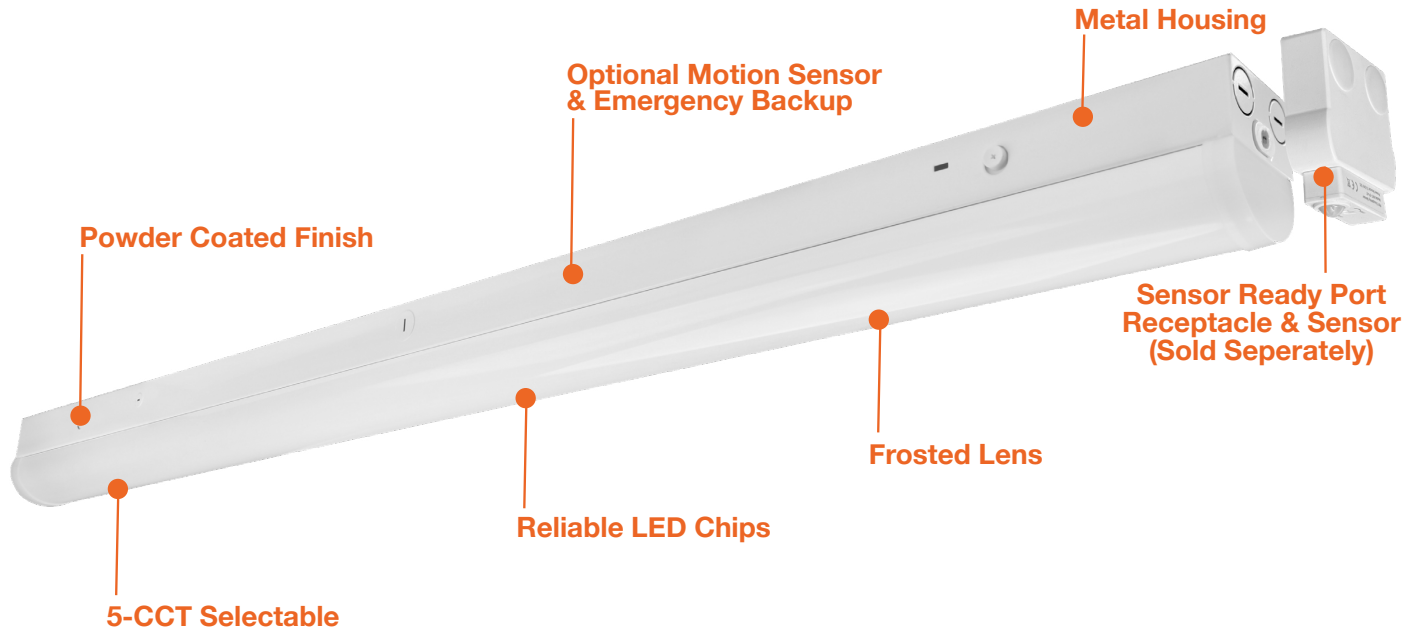

#### DIMENSIONS

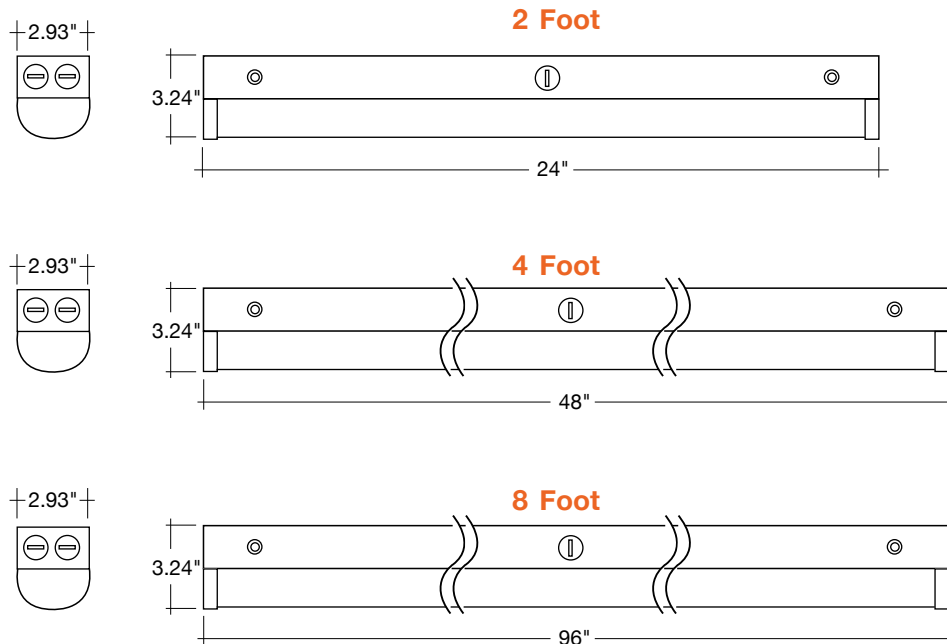

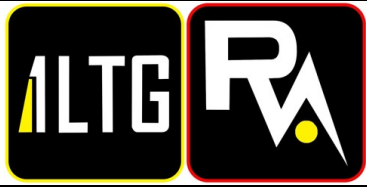

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-RST-4FT-3M40W-4CCT-SR

Line Item#: 49  
[Go to Bill of Materials](#)

Type: ST1

Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Round LED Strip Fixtures G3

### 4-CCT & 3-Power Selectable

#### ACCESSORIES



RST-SR



S-AUD-PIR-1  
S-AUD-PIR-BT  
S-AUD-PIR-SL



SK-10FT-Y-LC-PD  
SK-20FT-Y-LC-PD




RST-SM-CN




RST-PDM-CN




RST-2FT-WG  
RST-4FT-WG

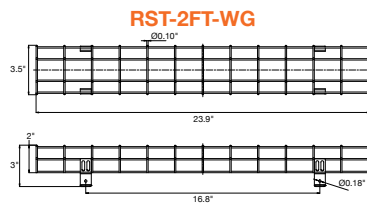

RST-2FT-WG

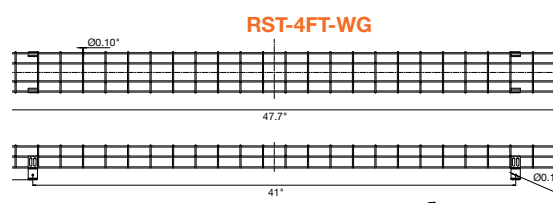

RST-4FT-WG



2-RST-4FT-WG FOR 8FT



Model	Voltage	Watts	Lumens	Color	CRI
LED-RST-2FT-3M25W-5CCT-SR	120-277V	25/20/15w	3,500/2,800/2,100	30/35/40/50/65k	>80
LED-RST-4FT-3M40W-5CCT-SR	120-277V	40/30/20w	5,200/3,900/2,600	30/35/40/50/65k	>80
LED-RST-4FT-3M80W-5CCT-SR	120-277V	80/65/50w	10,400/8,450/6,500	30/35/40/50/65k	>80
LED-RST-8FT-3M60W-5CCT-SR	120-277V	60/50/40w	7,800/6,500/5,200	30/35/40/50/65k	>80
LED-RST-8FT-3M100W-5CCT-SR	120-277V	100/85/70w	13,000/11,050/9,100	30/35/40/50/65k	>80

#### SENSORS

Pre-Installed Accessory Model	Description
RST-SR	Sensor Receptacle (REQUIRED)
S-AUD-PIR-1	PIR Bi-Level + Daylight: Audio Jack
S-AUD-PIR-BT	PIR Bi-Level + Daylight: Audio Jack Bluetooth EnVisionLS App
S-AUD-PIR-SL	PIR Bi-Level + Daylight: Audio Jack SILVAIR

#### SUSPENSION KIT


Model	Description
SK-10FT-Y-LC-PD	10' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)
SK-20FT-Y-LC-PD	20' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)

#### ACCESSORIES

Model	Description
RST-SM-CN	Surface Mount Linkable Bracket
RST-PDM-CN	Pendant Mount Linkable Bracket

#### WIRE GUARDS

Model	Description
RST-2FT-WG	2ft Wire Guard
RST-4FT-WG	4ft Wire Guard (order 2 for 8ft fixtures)

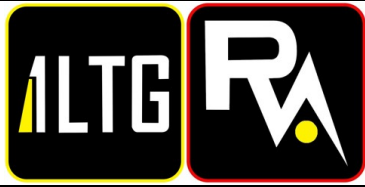

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-RST-4FT-3M40W-4CCT-SR









Line Item#: 49  
[Go to Bill of Materials](#)

Type: ST1


Powered by 4submittal.com

## EnVisionLED™ Control Options

EnVision LED offers 3 control systems compatible with our LED Fixtures for projects of all sizes and budgets.

	Basic Controls	EnVisionLS 	EnVisionLED™ x SILVAIR 
<b>Description</b>	Standard Plug In Sensors	Basic Bluetooth Wireless Control	Advanced Bluetooth Wireless Control
<b>Recommended Quantity</b> (but not limited to)	N/A	>40-50 Nodes	>50 Nodes
<b>Maximum Zone Quantity</b>	N/A	100	3,000
<b>Commissioning Tool</b>	Remote Only	  ENVISIONLS App 	  SILVAIR App 
<b>Commissioning Process</b>	Individually Set via Remote	Wireless Must be done on site	Wireless- Initial linking must be done on site. Commissioning can be done via desktop remotely.
<b>Floor Plan Upload</b>	N/A	N/A	Yes Add a floor plan and mark luminaires & zones via desktop
<b>Gateway</b>	N/A	N/A	Required only for energy monitoring, advanced scheduling, automated demand response.
<b>Individual Luminaire Control</b>	Yes	Yes	Yes
<b>Luminaire Grouping Zoning</b>	N/A	Yes	Yes
<b>High End Power Low End Power</b>	Yes but limited (View Remote)	Yes	Yes
<b>Cost</b>	\$	\$\$	\$\$\$
<b>DLC NLC Listed</b>	N/A	Yes	Yes
<b>Energy Monitoring &amp; Data Reporting</b>	N/A	N/A	Monitor energy usage per individual zone & retrofit cost savings calculation + detailed reporting



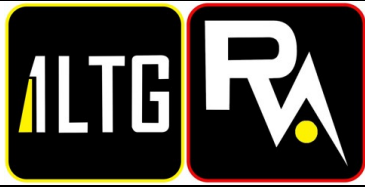

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-RST-4FT-3M40W-4CCT-SR

Line Item#: 49  
[Go to Bill of Materials](#)

Type: ST1

Powered by 4submittal.com





## Compatible Products:

EnVision offers a variety of nodes, sensors, & gateways that are controlled via remote, ENVISIONLS Bluetooth Mesh & SILVAIR Bluetooth Mesh on all of our 0-10V dimmable fixtures.






### Individual Fixture Controls: PIR Sensor, Bi-Level Dimming, Daylight


Basic Note: -1 • ENVISIONLS Models Note: -BT • SILVAIR Models Note: -SL


	MODEL #	DESIGN	RECOMMENDED FIXTURE	FEATURES
	S-TWC-PIR-1 S-TWC-PIR-BT S-TWC-PIR-SL	Twist-C Control Sensor	Sensor Ready Fixtures: Area Lights, Canopies, Flood Lights, High Bays	All models are equipped with PIR occupancy sensing, high & low end bi-level dimming, & daylight sensing.
	S-TWC-90 + S-TWC-PIR-1 S-TWC-90 + S-TWC-PIR-BT S-TWC-90 + S-TWC-PIR-SL	Twist-C Control Sensor + 90 Degree Arm	Cylinders, Strips, Wall Packs	
	S-AUD-PIR-1 S-AUD-PIR-BT S-AUD-PIR-SL	2.5m Audio Jack	Panels & Troffers	
	S-SN-PIR-1 S-SN-PIR-BT S-SN-PIR-SL	Snap In Sensor	Troffers & Wraps	

### Group Controls ENVISIONLS Models Note : -BT • SILVAIR Models Note: -SL

	MODEL #	DESIGN	VOLTAGE	FEATURES	RECOMMENDED FEATURES
	S-CM-PIR-LV-BT S-CM-PIR-LV-SL	Ceiling Mounted PIR Sensor	12-24V	PIR Sensor, Bi-Level Dimming, Daylight, 360° detection, 12' Max Mounting Height	Connects to 0-10V dimmable fixtures
	S-WM-PIR-CUNV-BT S-WM-PIR-CUNV-SL	Wall Mounted PIR Occupancy Sensor, Bi-Level Dimming, Daylight	120-277V	On/Off PIR occupancy sensor, 180° detection, 30' detection @ 4' Mounting Height	Connects to LED fixtures
	S-WS-120V-USB-SL		120V	Dimming Wall Socket, Two Sockets	Floor Lamps, Other Lamps

### Gateway (Silvaair Only) 4.5–5.5 V DC, 2A Power over Ethernet 36–57 V DC

	MODEL #	DESIGN	VOLTAGE	FEATURES	RECOMMENDED FEATURES
	SGW-102	Wall or Ceiling Mounted	POE	Advanced Energy Monitoring Control	Connects to Silvaair Controls. Gateway is not required.

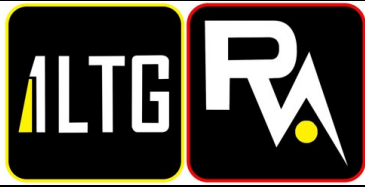

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-DH-HO

Line Item#: 50  
[Go to Bill of Materials](#)

Type: EM

Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Emergency Bug Eyes Square Models



Emergency



### Detail Specifications:

- Finish: White
- IP Rating: Dry Location
- Lumen Options
  - Standard: 3W 140LM
  - High Output: 6W 650LM
- Operating Temperature: -40° - 104° F
- Average life (L70) of 50,000 hours

### Applications:

- Exit Doors
- Corridor Intersections
- Exit Stairways
- Exit ramps

### Product Information:

- Built-in test switch and charge indicator light
- Overcharge and over-discharge protection
- Injection-molded thermoplastic housing, PC cover
- Backup Time: >90 minutes
- Recharge time: 24 hours

### Driver Options:

- Dual Voltage 120/277V
- PF >0.9, 50/60Hz
- Nickel Cadmium Battery 3.6V
- This fixture is non-dimmable

### Mounting & Installation:

- Wall and ceiling mounted
- Universal J-box mounting pattern

### Certifications:

- UL Listed for USA and CA (UL94V-0 Flame Rating)
- Meets UL924, NDPA 101
- Approved for CA T24
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

#### Series

**LED-EM-DH**

3W • 140Lm

**LED-EM-DH-HO**

6W • 650Lm

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 01.24





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-DH-HO

Line Item#: 50  
[Go to Bill of Materials](#)


Type: EM

Powered by 4submittal.com


**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Emergency Bug Eyes Square Models

### FEATURES

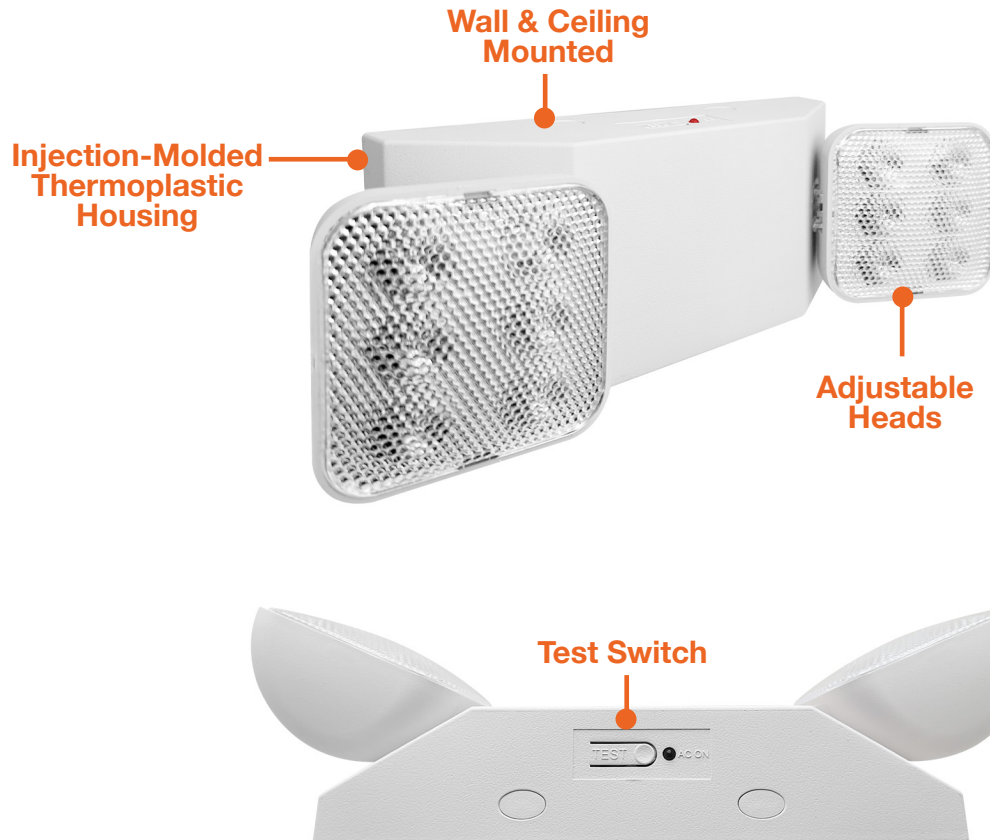

### DIMENSIONS

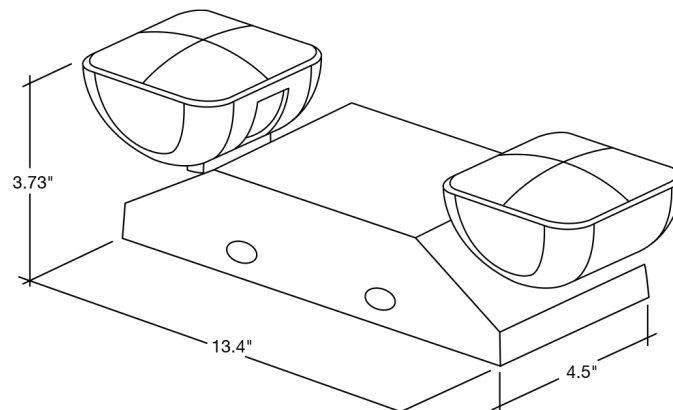

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 51  
[Go to Bill of Materials](#)

Type: SM1

Powered by 4submittal.com




LIGHTING | REINVENTED

plano **ARCH** PRO

## LDLL | Eclipse-II

Product Data Sheet

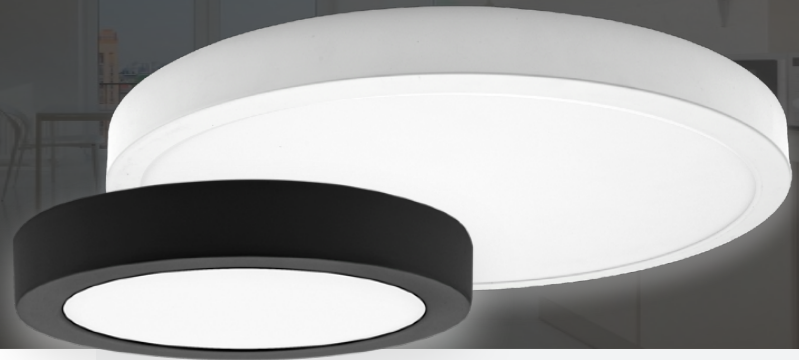

COMMERCIAL-GRADE

### LED Surface Mount Puck Downlight



CCTselect



TruColor Rendering

5" / 7" / 9" / 11" / 13"

#### Product Overview

**INTENDED USE** — The Eclipse-II Series is built for 5-way switchable CCT and is suitable for use in dry, damp, and wet locations, perfect for use in kitchens, hallways, stairways, bathrooms, closets, and just about anywhere you'd need it.

**CONSTRUCTION** — The die-cast aluminum housing is designed for durability and ruggedness.

**INSTALLATION** — Quick-mount aluminum backplate for easy installation.

**WARRANTY** — Featuring a no-compromise 5-year warranty, Energy Star and JA8-compliant, the Eclipse-II is a clean and modern solution for surface mounted driverless design.

ARCHIPELAGO luminaires and LED components undergo rigorous testing by an independent laboratory to meet IESNA LM-79 and LM-80 standards for light output and lumen maintenance. LED color temperature is warranted to shift no more than 180K over the standard warranty period. Correlated Color Temperature (CCT) follows the guidelines set forth in the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

#### Applications



Residential



Hallway



Patio



Entryway

#### Main Features

- Low-Profile Edge-Lit Surface Mount Design
- Durable Di-Cast Aluminum Trim w/ Frosted Lens
- For New Construction or Retrofit Applications
- Suitable for Use in Dry, Damp and Wet Locations
- Suitable for Use in Closets, In Accordance to NEC Guidelines
- Installs on Ceiling and Standard Junction Boxes
- Dimmable to 10% on Compatible TRIAC Dimmers
- 5-Year, 50,000 Hr Warranty
- CEC T24 JA8 Compliant
- NEC Compliant, Suitable for Use in Closet
- Energy Star Certified for 5", 7", 9"

#### Product Warranty\*

5-Year Warranty



50,000 Hrs



\* Standard warranty. Extended warranty available.

Archipelago Lighting, Inc.

| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

[Contact Us](#)





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 51  
[Go to Bill of Materials](#)

Type: SM1

Powered by 4submittal.com



LDLL | Eclipse-II

**Low-Glare Lens**  
Smooth diffused light output.

**Driverless**  
Minimizes installation height.

**IP54**  
Suitable for damp locations.

**Solid Backplate**  
Passive heat dissipation.

**Edge-Lit Technology**  
Even and uniform light distribution.

**PMMA Lens**  
Durable, no-yellowing lens.



#### Ordering Guide<sup>1</sup>

Model Series	Size (in) / Wattage (W)	Series	CCTselect (K)	Finish Color
<b>LDLL</b> LED Surface Mount Puck Downlight	<b>0510</b> 5inch / 10W <b>0715</b> 7inch / 15W <b>0918</b> 9inch / 18W <b>1121</b> 11inch / 21W <b>1324</b> 13inch / 24W	- <b>E2</b> Eclipse-II	<b>S5</b> 5-CCTselect: 2700K 3000K 3500K 4000K 5000K	/ <b>B</b> Black <b>W</b> White
<b>CATALOG #:</b>				
<b>LDLL</b>		- <b>E2</b>	<b>S5</b>	/

#### Options Guide<sup>2</sup>

EM Driver <sup>3</sup>	Motion Sensor
<input type="checkbox"/> <b>EM15</b> 15W EM Driver <input type="checkbox"/> <b>CRCU</b> 15W EM Driver with Junction Box	<input type="checkbox"/> <b>MSP/W</b> PIR Bi-Level Sensor for 7" and 9" ONLY (White Finish)
<b>OPTIONAL ACCESSORIES #:</b>	

NOTE:

- Only one selection may be applicable within the same category.
- Multiple selections may be applicable within the same option category. See Compatible Accessories below for details.
- EM drivers only work with 7, 9, 11 and 13in fixtures

Archipelago Lighting, Inc.


| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

**Contact Us**

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220






	Date: 1/12/2026	Description: LDLL0510-E2S5/W	Line Item#: 51
	Project: FINDLAY FLATS		<a href="#">Go to Bill of Materials</a>
			Type: SM1

Powered by 4submittal.com



LDLL | Eclipse-II

Sizing & Measurements


Model Series	Dimensions	Overall Diameter (in)	Depth (IN)
LDLL0510-E2		5.51	0.79
LDLL0715-E2		7.48	0.82
LDLL0918-E2		8.86	0.79
LDLL1121-E2		10.98	0.98
LDLL1124-E2		12.80	0.98

Recommended Dimmers

Make	Models			
Lutron	TG-600PR-WH S-600PR-WH CTCL-153PDH-WH	TGCL-153PH-LA SLV-600P-AL DV-600PR-WH	SCL-153PH-WH GT-600P DVCL-153P	MSCL-OP153M MACL-153M//MA-R PD-6WCL
Leviton	6672 IPL06	6674	DSL06	RNL06

Accessories (Standard)

Accessories (Optional)



<b>Mounting Bracket</b>	<b>Wire Nuts</b>	<b>Bolts</b>	<b>15W EM Driver</b>	<b>PIR Bi-Level Sensor</b>
Compatible to 2.75" or 3.50" Junction Box			EM15-HMB/170DC CRCU-EM/JBM	LDLL-E2/MSP/W

Archipelago Lighting, Inc.

| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 51  
[Go to Bill of Materials](#)


Type: SM1


Powered by 4submittal.com



LDLL | Eclipse-II

EM Driver / J-Box (Optional)

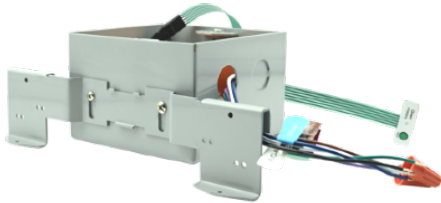

Technical Specification	CRCU-EM/JBM
Emergency Power	15W Max
Installation Method	Recessed
IP Rating	IP20
CEC T.24/JA8 Compliant	Yes
Color Finish	Grey
Physical Features	<ul style="list-style-type: none"><li>Directly connect to AC input</li><li>Fits 2.75" and 3.5" J-Box</li><li>Supports recessed in-ceiling mount</li></ul>
Self-Diagnostic Test Switch	<ol style="list-style-type: none"><li>Emergency conversion kit will go into emergency mode when test switch is pressed while main power is ON.</li><li>Will go into charging mode if test switch is not pressed.</li><li>In emergency mode, pressing the test switch for 3-seconds will inactivate emergency mode.</li></ol>
Indicator Status Light	<ol style="list-style-type: none"><li>Green ON: Charging mode / charging full</li><li>Green OFF: Mains power OFF / discharging mode</li></ol>
Dimension	<p>W4.29in x H2.96</p> 

Archipelago Lighting, Inc.

| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 52  
[Go to Bill of Materials](#)

Type: SM3

Powered by 4submittal.com




LIGHTING | REINVENTED

plano **ARCH** PRO

## LDLL | Eclipse-II

Product Data Sheet

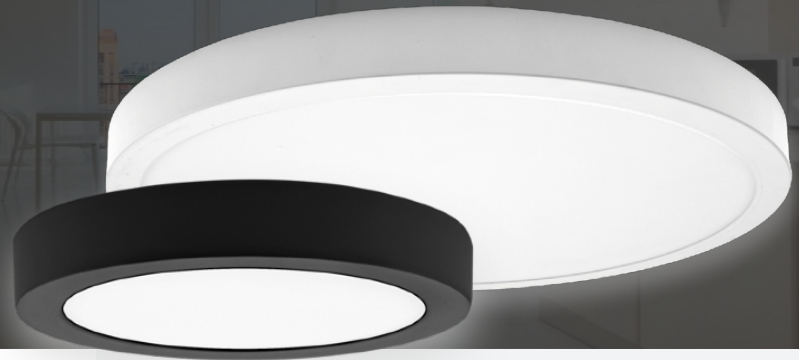

COMMERCIAL-GRADE

### LED Surface Mount Puck Downlight



CCTselect



TruColor Rendering

5" / 7" / 9" / 11" / 13"

#### Product Overview

**INTENDED USE** — The Eclipse-II Series is built for 5-way switchable CCT and is suitable for use in dry, damp, and wet locations, perfect for use in kitchens, hallways, stairways, bathrooms, closets, and just about anywhere you'd need it.

**CONSTRUCTION** — The die-cast aluminum housing is designed for durability and ruggedness.

**INSTALLATION** — Quick-mount aluminum backplate for easy installation.

**WARRANTY** — Featuring a no-compromise 5-year warranty, Energy Star and JA8-compliant, the Eclipse-II is a clean and modern solution for surface mounted driverless design.

ARCHIPELAGO luminaires and LED components undergo rigorous testing by an independent laboratory to meet IESNA LM-79 and LM-80 standards for light output and lumen maintenance. LED color temperature is warranted to shift no more than 180K over the standard warranty period. Correlated Color Temperature (CCT) follows the guidelines set forth in the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

#### Applications



Residential



Hallway



Patio



Entryway

#### Main Features

- Low-Profile Edge-Lit Surface Mount Design
- Durable Di-Cast Aluminum Trim w/ Frosted Lens
- For New Construction or Retrofit Applications
- Suitable for Use in Dry, Damp and Wet Locations
- Suitable for Use in Closets, In Accordance to NEC Guidelines
- Installs on Ceiling and Standard Junction Boxes
- Dimmable to 10% on Compatible TRIAC Dimmers
- 5-Year, 50,000 Hr Warranty
- CEC T24 JA8 Compliant
- NEC Compliant, Suitable for Use in Closet
- Energy Star Certified for 5", 7", 9"

#### Product Warranty\*

5-Year Warranty



50,000 Hrs



\* Standard warranty. Extended warranty available.

Archipelago Lighting, Inc.


| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

[Contact Us](#)



LDLL | Eclipse-II



Project Details





Project Name:

Fixture Schedule:

Project Number:

Notes:

Highlights

Features		Description
5-CCTselect		CCT selectable: 5-way dip-switch
Sensor Ready		Optional plug-n-play motion sensor available on 7" and 9"
TruColor High CRI		Title 24 Compliant. JA8 LED 90CRI+
Limited Warranty		5-Year Warranty

Key Specifications

- Input Voltage: 120V
- Dimming: TRIAC
- Efficacy: ≤103lm/W
- IP: Suitable for Wet Location
- Housing: Die-Cast Aluminum
- Power Factor (PF): >0.9 Non-Flicker
- Operating Temperature: -4°F - 113°F
- Total Harmonic Distortion (THD): <20%
- Beam Angle (°): 120°

Certifications



Model Specifications

Model	Size (in)	Wattage (W)	Lumen (lm)	Efficacy (lm/W)	5-CCTselect (K) <sup>1</sup>	Voltage (V)	CRI
LDLL0510	5"	10W	671lm 675lm 698lm 712lm 689lm	67lm/W 68lm/W 70lm/W 71lm/W 69lm/W	2700K 3000K 3500K 4000K 5000K	120V	90CRI+
LDLL0715	7"	15W	1,187lm 1,205lm 1,211lm 1,257lm 1,241lm	79lm/W 80lm/W 81lm/W 84lm/W 83lm/W	2700K 3000K 3500K 4000K 5000K		
LDLL0918	9"	18W	1,409lm 1,415lm 1,436lm 1,460lm 1,442lm	78lm/W 79lm/W 80lm/W 81lm/W 80lm/W	2700K 3000K 3500K 4000K 5000K		
LDLL1121	11"	21W	2,022lm 2,035lm 2,054lm 2,165lm 2,159lm	96lm/W 97lm/W 98lm/W 103lm/W 103lm/W	2700K 3000K 3500K 4000K 5000K		
LDLL1324	13"	24W	2,393lm 2,407lm 2,450lm 2,455lm 2,446lm	100lm/W 100lm/W 102lm/W 102lm/W 102lm/W	2700K 3000K 3500K 4000K 5000K		

1. Default settings on CCTselect is highest CCT available.

Archipelago Lighting, Inc.

Headquarter: 4615 State Street, Montclair, CA 91763  
USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)  
+1 (866) 912-3220





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W


Line Item#: 52  
[Go to Bill of Materials](#)

Type: SM3

Powered by 4submittal.com



LDLL | Eclipse-II

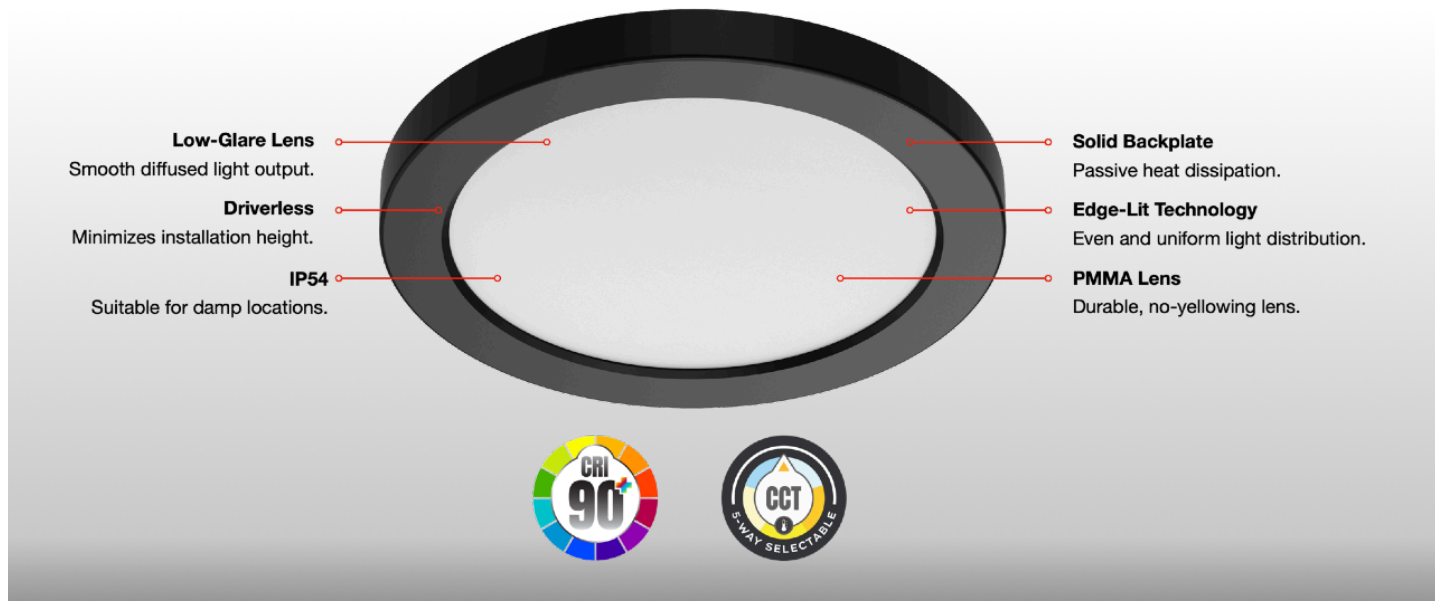

#### Ordering Guide<sup>1</sup>

Model Series	Size (in) / Wattage (W)	Series	CCTselect (K)	Finish Color
<b>LDLL</b> LED Surface Mount Puck Downlight	<b>0510</b> 5inch / 10W <b>0715</b> 7inch / 15W <b>0918</b> 9inch / 18W <b>1121</b> 11inch / 21W <b>1324</b> 13inch / 24W	- <b>E2</b> Eclipse-II	<b>S5</b> 5-CCTselect: 2700K 3000K 3500K 4000K 5000K	/ <b>B</b> Black <b>W</b> White
<b>CATALOG #:</b>				
<b>LDLL</b>		- <b>E2</b>	<b>S5</b>	/

#### Options Guide<sup>2</sup>

EM Driver <sup>3</sup>	Motion Sensor
<input type="checkbox"/> <b>EM15</b> 15W EM Driver <input type="checkbox"/> <b>CRCU</b> 15W EM Driver with Junction Box	<input type="checkbox"/> <b>MSP/W</b> PIR Bi-Level Sensor for 7" and 9" ONLY (White Finish)
<b>OPTIONAL ACCESSORIES #:</b>	

NOTE:

1. Only one selection may be applicable within the same category.
2. Multiple selections may be applicable within the same option category. See Compatible Accessories below for details.
3. EM drivers only work with 7, 9, 11 and 13in fixtures

Archipelago Lighting, Inc.


| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

**Contact Us**

[www.archipelagolighting.com](http://www.archipelagolighting.com)






+1 (866) 912-3220

	Date: 1/12/2026	Description: LDLL0510-E2S5/W	Line Item#: 52
	Project: FINDLAY FLATS		<a href="#">Go to Bill of Materials</a>
			Type: SM3
Powered by 4submittal.com			



LDLL | Eclipse-II

Sizing & Measurements

Model Series	Dimensions	Overall Diameter (in)	Depth (IN)
LDLL0510-E2		5.51	0.79
LDLL0715-E2		7.48	0.82
LDLL0918-E2		8.86	0.79
LDLL1121-E2		10.98	0.98
LDLL1124-E2		12.80	0.98

Recommended Dimmers


Make	Models			
Lutron	TG-600PR-WH S-600PR-WH CTCL-153PDH-WH	TGCL-153PH-LA SLV-600P-AL DV-600PR-WH	SCL-153PH-WH GT-600P DVCL-153P	MSCL-OP153M MACL-153M//MA-R PD-6WCL
Leviton	6672 IPL06	6674	DSL06	RNL06

Accessories (Standard)

Accessories (Optional)



<b>Mounting Bracket</b>	<b>Wire Nuts</b>	<b>Bolts</b>	<b>15W EM Driver</b>	<b>PIR Bi-Level Sensor</b>
Compatible to 2.75" or 3.50" Junction Box			EM15-HMB/170DC CRCU-EM/JBM	LDLL-E2/MSP/W

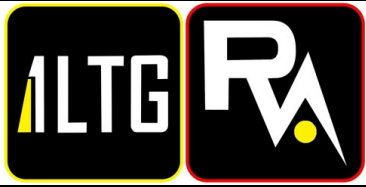

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 52  
[Go to Bill of Materials](#)


Type: SM3


Powered by 4submittal.com



LDLL | Eclipse-II

EM Driver / J-Box (Optional)

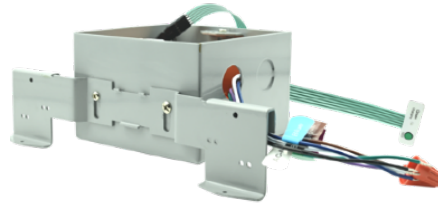

Technical Specification	CRCU-EM/JBM
Emergency Power	15W Max
Installation Method	Recessed
IP Rating	IP20
CEC T.24/JA8 Compliant	Yes
Color Finish	Grey
Physical Features	<ul style="list-style-type: none"><li>Directly connect to AC input</li><li>Fits 2.75" and 3.5" J-Box</li><li>Supports recessed in-ceiling mount</li></ul>
Self-Diagnostic Test Switch	<ol style="list-style-type: none"><li>Emergency conversion kit will go into emergency mode when test switch is pressed while main power is ON.</li><li>Will go into charging mode if test switch is not pressed.</li><li>In emergency mode, pressing the test switch for 3-seconds will inactivate emergency mode.</li></ol>
Indicator Status Light	<ol style="list-style-type: none"><li>Green ON: Charging mode / charging full</li><li>Green OFF: Mains power OFF / discharging mode</li></ol>
Dimension	W4.29in x H2.96 

Archipelago Lighting, Inc.


| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220

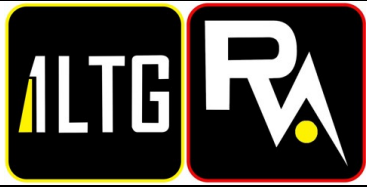

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-VT-ADJ-24-21W-5CCT-BN

Line Item#: 53  
[Go to Bill of Materials](#)

Type: V1

Powered by 4submittal.com

**EnVisionLED**<sup>TM</sup>  
WWW.ENVISIONLEDLIGHTING.COM

## Vanity Fixtures

### Square Adjustable Swivel



FRONT VIEW



90° Rotatable Angle

Vanity Fixture



#### Detail Specifications:

- Power: 21W
- Lumens: 2,700
- Finishes: Black, Brushed Nickel, Chrome
- IP Rating: IP54 Damp Location
- Beam Angle: 100°
- Chip: SMD 2835, R9 >50, CRI >90
- Operating Temperature: -40° - 114° F
- Lens: Frosted Acrylic, non-yellowing
- Average life (L70) of 50,000 hours

#### Applications:

- Bathrooms & Lavatories
- Hallways & Corridors
- Artwork, Museums
- Residential & Multifamily
- Education, Healthcare, Retail, Hospitality

#### Product Information:

- Available in 23.6" length
- Adjustable Angle: Lens swivels up and down
- Wide j-box for easier installation in retrofit and new construction applications
- Select-n-Switch Technology: 5-CCT Selectable

#### Driver Options:

- Triac & ELV dimmable down to 5%
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz
- Built in 2.5Kv Surge Protector
- Flicker Free

#### Mounting & Installations:

- 30/40 Junction Box
- Surface mount bracket included

#### Certifications:

- ETL Listed for USA and CA
- CA Title 24 JA8-2022 CEC Listed
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

#### Series

LED-VT-ADJ-24-21W-5CCT-BL

Black

LED-VT-ADJ-24-21W-5CCT-BN

Brushed Nickel

LED-VT-ADJ-24-21W-5CCT-CH


Chrome

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 04.25

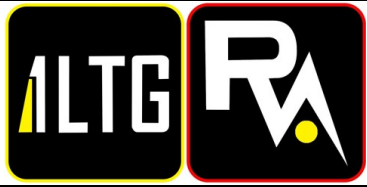

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-VT-ADJ-24-21W-5CCT-BN

Line Item#: 53  
[Go to Bill of Materials](#)

Type: V1

Powered by 4submit.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM


## Vanity Fixtures

### Square Adjustable Swivel

#### FEATURES




90° Rotatable Angle



5-CCT Selectable

#### MEASUREMENTS

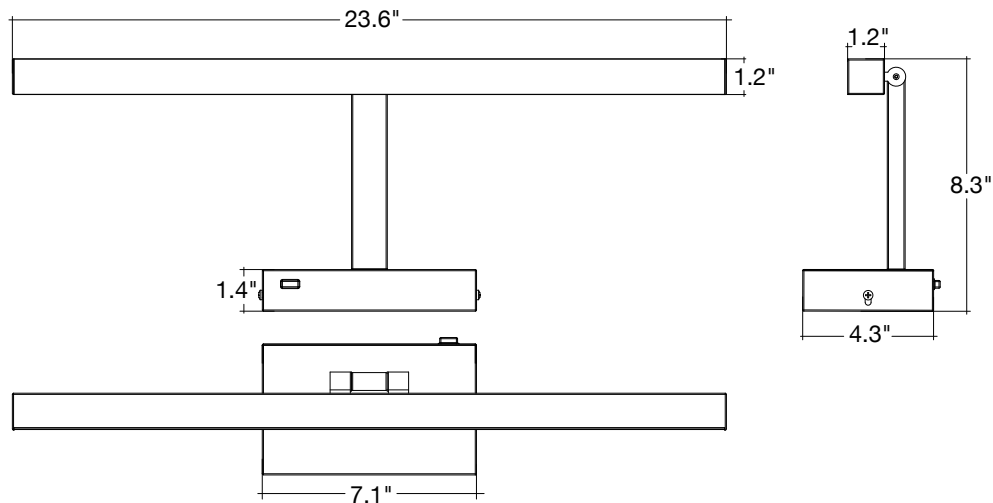

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)



Date: 1/12/2026

Project:  
FINDLAY FLATSDescription:  
LED-RST-4FT-3M40W-4CCT-SRLine Item#: 55  
[Go to Bill of Materials](#)

Type: ST1

Powered by 4submittal.com


  
[WWW.ENVISIONLEDLIGHTING.COM](http://WWW.ENVISIONLEDLIGHTING.COM)

## Round LED Strip Fixtures

### 5-CCT & 3-Power Selectable

### Sensor Ready



3M25W		3M40W		3M60W		3M80W		3M100W	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
15	2,100	20	2,600	40	5,200	50	6,500	70	9,100
20	2,800	30	3,900	50	6,500	65	8,450	85	11,050
25	3,500	40	5,200	60	7,800	80	10,400	100	13,000

Project: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_


Strips

**Detail Specification:**

- Finish: White, Custom finishes available
- IP Rating: Damp Location (IP44)
- Beam Angle: 130°
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 122° F
- Lens: Round Acrylic Frosted Lens
- Average life (L70) of 50,000 hours

**Applications:**

- Stairwell & Hallways
- Utility & Storage
- Garage Structures
- Office and Meeting Rooms
- Shop Lighting
- Commercial and Industrial

**Product Information:**

- Aluminum housing finished with corrosion free power coat
- Easy j-box access: snap on and off tool-less design
- 40 J-box cover included with every fixture
- Audio Jack Sensor Ready (with RST-SR bracket)
- Sensor Options:
  - Standard Sensors
  - SILVAIR Bluetooth Mesh
  - ENVISIONLS Bluetooth
  - [Click Here](#) for More Information

**Driver Options:**

- UNV: 120-277V 0-10V Dimmable
- Optional 347-480V step down transformer available
- THD: <15% (+/-5% tolerance), PF >0.9, 50/60Hz
- 12V low voltage aux output for controls
- Flicker Free

**Mounting & Installation**

- Surface mount into 30 or 40 j-box
- Optional 10' & 20' suspension kit available
- Optional 6' chain mount available
- Rated for installation in closets

**Certifications**

- UL Listed for USA and CA
- DLC Premium Listed
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

**Series**

LED-RST-2FT-3M25W-5CCT-SR  
 LED-RST-4FT-3M40W-5CCT-SR  
 LED-RST-8FT-3M60W-5CCT-SR  
 LED-RST-8FT-3M100W-5CCT-SR

**Sensor <sup>1</sup>**

(Blank)  
 No Sensor  
**BMS<sup>1</sup>**  
 Microwave  
 Bi-Level Motion  
 + Daylight Sensor  
 (Internal Sensor)  
**BMSPiR**  
 Available for field  
 install.

**Emergency <sup>2</sup>**

(Blank)  
 No Emergency  
 Backup  
**EMB**  
 Emergency  
 Backup  
**EMB20**  
 Emergency  
 Backup (20W)

**Finish <sup>3</sup>**

(Blank)  
 White  
**BL**  
 Black  
**GRY<sup>3</sup>**  
 Gray  
**BRZ<sup>3</sup>**  
 Bronze  
**CS<sup>3</sup>**  
 Custom Color

**Flex**

(Blank)  
 No Flex  
**6FLX**  
 6' Flex  
 Whip

1. Sensor Note:  
 Microwave: Detects motion through barriers such as walls, and doors.  
 Ideal for applications where obstacles might obstruct the line of sight.  
 Works effectively outdoors, in large open spaces, & parking lots.  
 Do not use in areas of high vibrations or metal.  
 PIR: Ideal for indoor environments with clear lines of sight to the area  
 of interest. Detects warm objects, like a person or animal.  
 Good for high vibration, areas of metal.

2. Standard emergency  
 is 8W (1,040LM).  
 20W available,  
 inquire factory

3. Standard quick  
 ship finish is  
 white & black.  
 Other colors  
 are custom finishes.

**Optional Accessories (Order Separately)**

Sensors	Suspension Kit	Accessories	Wire Guards
<b>RST-SR</b> Receptacle for Sensor (Required for below sensors) <b>S-AUD-PIR-1</b> PIR Bi-Level Motion + Daylight Sensor Remote Required: (S-LINE-R) <b>S-AUD-PIR-BT</b> PIR ENVISIONLS Bluetooth Control <b>S-AUD-PIR-SL</b> PIR SILVAIR Bluetooth Mesh	<b>SK-10FT-Y-LC-PD</b> 10' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length) <b>SK-20FT-Y-LC-PD</b> 20' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)	<b>RST-SM-CN</b> Surface mount linkable bracket <b>RST-PDM-CN</b> Pendant mount linkable bracket	<b>RST-2FT-WG</b> 2ft Wire Guard <b>RST-4FT-WG</b> Wire Guard (order 2 for 8ft fixtures)

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**

 6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 10.25



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-RST-4FT-3M40W-4CCT-SR

Line Item#: 55  
[Go to Bill of Materials](#)

Type: ST1


Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM


## Round LED Strip Fixtures

### 5-CCT & 3-Power Selectable

#### FEATURES

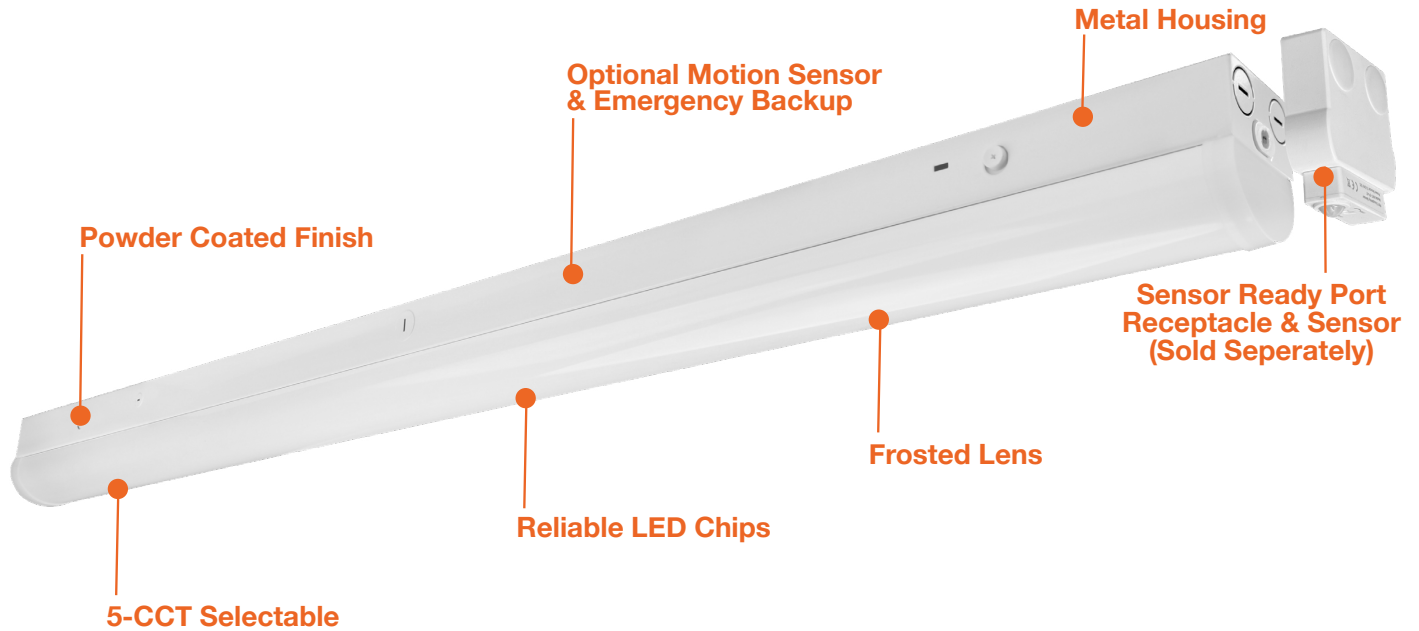

#### DIMENSIONS

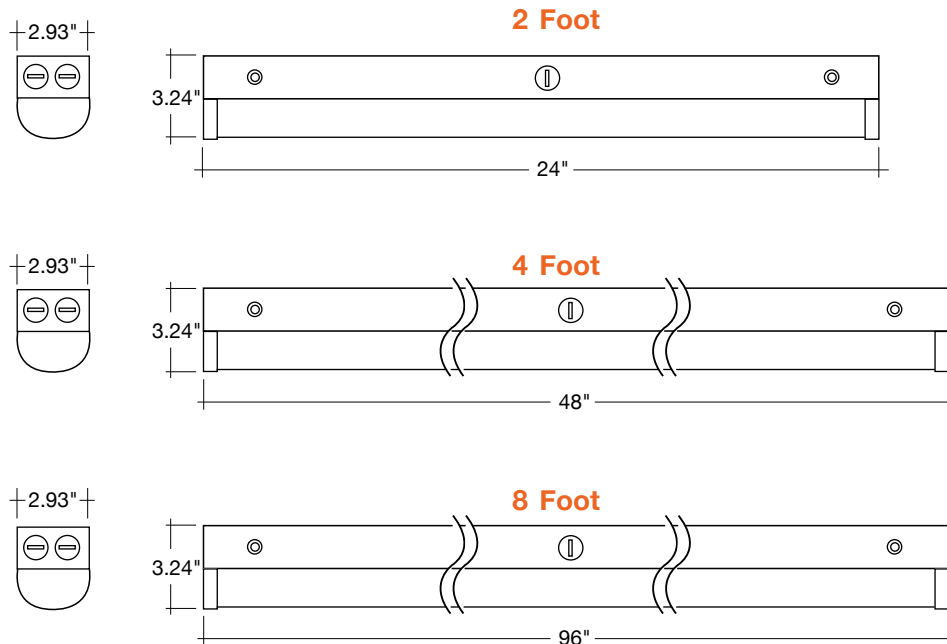





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-RST-4FT-3M40W-4CCT-SR

Line Item#: 55  
[Go to Bill of Materials](#)

Type: ST1

Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Round LED Strip Fixtures G3

### 4-CCT & 3-Power Selectable

#### ACCESSORIES



RST-SR



S-AUD-PIR-1  
S-AUD-PIR-BT  
S-AUD-PIR-SL



SK-10FT-Y-LC-PD  
SK-20FT-Y-LC-PD




RST-SM-CN




RST-PDM-CN




RST-2FT-WG  
RST-4FT-WG

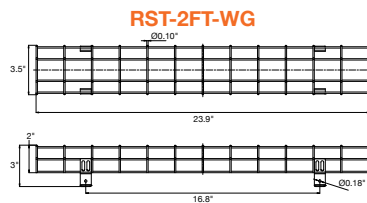

RST-2FT-WG

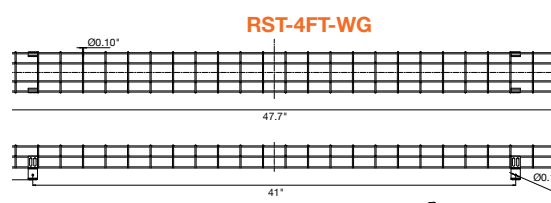

RST-4FT-WG



2-RST-4FT-WG FOR 8FT



Model	Voltage	Watts	Lumens	Color	CRI
LED-RST-2FT-3M25W-5CCT-SR	120-277V	25/20/15w	3,500/2,800/2,100	30/35/40/50/65k	>80
LED-RST-4FT-3M40W-5CCT-SR	120-277V	40/30/20w	5,200/3,900/2,600	30/35/40/50/65k	>80
LED-RST-4FT-3M80W-5CCT-SR	120-277V	80/65/50w	10,400/8,450/6,500	30/35/40/50/65k	>80
LED-RST-8FT-3M60W-5CCT-SR	120-277V	60/50/40w	7,800/6,500/5,200	30/35/40/50/65k	>80
LED-RST-8FT-3M100W-5CCT-SR	120-277V	100/85/70w	13,000/11,050/9,100	30/35/40/50/65k	>80

#### SENSORS

Pre-Installed Accessory Model	Description
RST-SR	Sensor Receptacle (REQUIRED)
S-AUD-PIR-1	PIR Bi-Level + Daylight: Audio Jack
S-AUD-PIR-BT	PIR Bi-Level + Daylight: Audio Jack Bluetooth EnVisionLS App
S-AUD-PIR-SL	PIR Bi-Level + Daylight: Audio Jack SILVAIR

#### SUSPENSION KIT


Model	Description
SK-10FT-Y-LC-PD	10' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)
SK-20FT-Y-LC-PD	20' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)

#### ACCESSORIES

Model	Description
RST-SM-CN	Surface Mount Linkable Bracket
RST-PDM-CN	Pendant Mount Linkable Bracket

#### WIRE GUARDS

Model	Description
RST-2FT-WG	2ft Wire Guard
RST-4FT-WG	4ft Wire Guard (order 2 for 8ft fixtures)

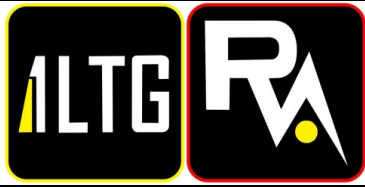

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-RST-4FT-3M40W-4CCT-SR









Line Item#: 55  
[Go to Bill of Materials](#)

Type: ST1

Powered by 4submittal.com

## EnVisionLED™ Control Options

EnVision LED offers 3 control systems compatible with our LED Fixtures for projects of all sizes and budgets.

	Basic Controls	EnVisionLS 	EnVisionLED™ x SILVAIR 
<b>Description</b>	Standard Plug In Sensors	Basic Bluetooth Wireless Control	Advanced Bluetooth Wireless Control
<b>Recommended Quantity</b> (but not limited to)	N/A	>40-50 Nodes	>50 Nodes
<b>Maximum Zone Quantity</b>	N/A	100	3,000
<b>Commissioning Tool</b>	Remote Only	  ENVISIONLS App 	  SILVAIR App 
<b>Commissioning Process</b>	Individually Set via Remote	Wireless Must be done on site	Wireless- Initial linking must be done on site. Commissioning can be done via desktop remotely.
<b>Floor Plan Upload</b>	N/A	N/A	Yes Add a floor plan and mark luminaires & zones via desktop
<b>Gateway</b>	N/A	N/A	Required only for energy monitoring, advanced scheduling, automated demand response.
<b>Individual Luminaire Control</b>	Yes	Yes	Yes
<b>Luminaire Grouping Zoning</b>	N/A	Yes	Yes
<b>High End Power Low End Power</b>	Yes but limited (View Remote)	Yes	Yes
<b>Cost</b>	\$	\$\$	\$\$\$
<b>DLC NLC Listed</b>	N/A	Yes	Yes
<b>Energy Monitoring &amp; Data Reporting</b>	N/A	N/A	Monitor energy usage per individual zone & retrofit cost savings calculation + detailed reporting





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-RST-4FT-3M40W-4CCT-SR

Line Item#: 55  
[Go to Bill of Materials](#)

Type: ST1

Powered by 4submittal.com





## Compatible Products:

EnVision offers a variety of nodes, sensors, & gateways that are controlled via remote, ENVISIONLS Bluetooth Mesh & SILVAIR Bluetooth Mesh on all of our 0-10V dimmable fixtures.






### Individual Fixture Controls: PIR Sensor, Bi-Level Dimming, Daylight


Basic Note: -1 • ENVISIONLS Models Note: -BT • SILVAIR Models Note: -SL


	MODEL #	DESIGN	RECOMMENDED FIXTURE	FEATURES
	S-TWC-PIR-1 S-TWC-PIR-BT S-TWC-PIR-SL	Twist-C Control Sensor	Sensor Ready Fixtures: Area Lights, Canopies, Flood Lights, High Bays	All models are equipped with PIR occupancy sensing, high & low end bi-level dimming, & daylight sensing.
	S-TWC-90 + S-TWC-PIR-1 S-TWC-90 + S-TWC-PIR-BT S-TWC-90 + S-TWC-PIR-SL	Twist-C Control Sensor + 90 Degree Arm	Cylinders, Strips, Wall Packs	
	S-AUD-PIR-1 S-AUD-PIR-BT S-AUD-PIR-SL	2.5m Audio Jack	Panels & Troffers	
	S-SN-PIR-1 S-SN-PIR-BT S-SN-PIR-SL	Snap In Sensor	Troffers & Wraps	

### Group Controls ENVISIONLS Models Note : -BT • SILVAIR Models Note: -SL

	MODEL #	DESIGN	VOLTAGE	FEATURES	RECOMMENDED FEATURES
	S-CM-PIR-LV-BT S-CM-PIR-LV-SL	Ceiling Mounted PIR Sensor	12-24V	PIR Sensor, Bi-Level Dimming, Daylight, 360° detection, 12' Max Mounting Height	Connects to 0-10V dimmable fixtures
	S-WM-PIR-CUNV-BT S-WM-PIR-CUNV-SL	Wall Mounted PIR Occupancy Sensor, Bi-Level Dimming, Daylight	120-277V	On/Off PIR occupancy sensor, 180° detection, 30' detection @ 4' Mounting Height	Connects to LED fixtures
	S-WS-120V-USB-SL		120V	Dimming Wall Socket, Two Sockets	Floor Lamps, Other Lamps

### Gateway (Silvaire Only) 4.5–5.5 V DC, 2A Power over Ethernet 36–57 V DC

	MODEL #	DESIGN	VOLTAGE	FEATURES	RECOMMENDED FEATURES
	SGW-102	Wall or Ceiling Mounted	POE	Advanced Energy Monitoring Control	Connects to Silvaire Controls. Gateway is not required.

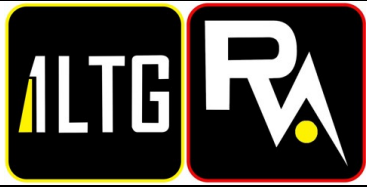

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-EXT-RG-WH-CMB-RC

Line Item#: 56  
[Go to Bill of Materials](#)

Type: EX/EM

Powered by 4submittal.com

**EnVisionLED**<sup>TM</sup>  
[WWW.ENVISIONLEDLIGHTING.COM](http://WWW.ENVISIONLEDLIGHTING.COM)

## Emergency Exit Sign With Bug Eyes



### Emergency Exit Signs



#### Detail Specifications:

- Finish: White Finish
- IP Rating: IP20, Dry Location
- Wattage: 3.5W
- Lumens: 140
- Operating Temperature: 32°F to 104°F
- Lens: Red or Green
- Remoted Capable
- Compatible with: LED-EM-RC-1, LED-EM-RC-2
- Average life (L70) of 50,000 hours

#### Applications:

- Exit Doors
- Corridor Intersections
- Exit Stairways
- Exit Ramps

#### Product Information:

- Built-in test switch and charge indicator
- Injection-molded thermoplastic housing, PC cover
- Backup Time: >90 minutes
- Recharge time: 24 hours
- Single Face
- 6" height letters with 3/4" stroke, viewable from 100ft away

#### Driver Options:

- Dual Voltage 120/277V
- PF >0.9, 50/60Hz

#### Mounting & Installations:

- Wall and ceiling mounted
- Universal J-box mounting pattern

#### Certifications:

- UL Listed for USA and CA (UL94V-0 Flame Rating)
- Meets UL924, NDPA 101
- Approved for CA T24
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

#### REMOTE HEAD OPTIONS

LED-EM-RC-1

LED-EM-RC-2

Series

**LED-EM-EXT-RG-WH-CMB-RC**


Red/Green Color Selectable

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 08.25

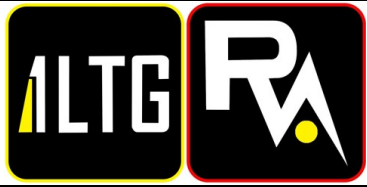

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-EXT-RG-WH-CMB-RC

Line Item#: 56  
[Go to Bill of Materials](#)


Type: EX/EM

Powered by 4submit.com


**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## Emergency Exit Sign With Bug Eyes

### FEATURES

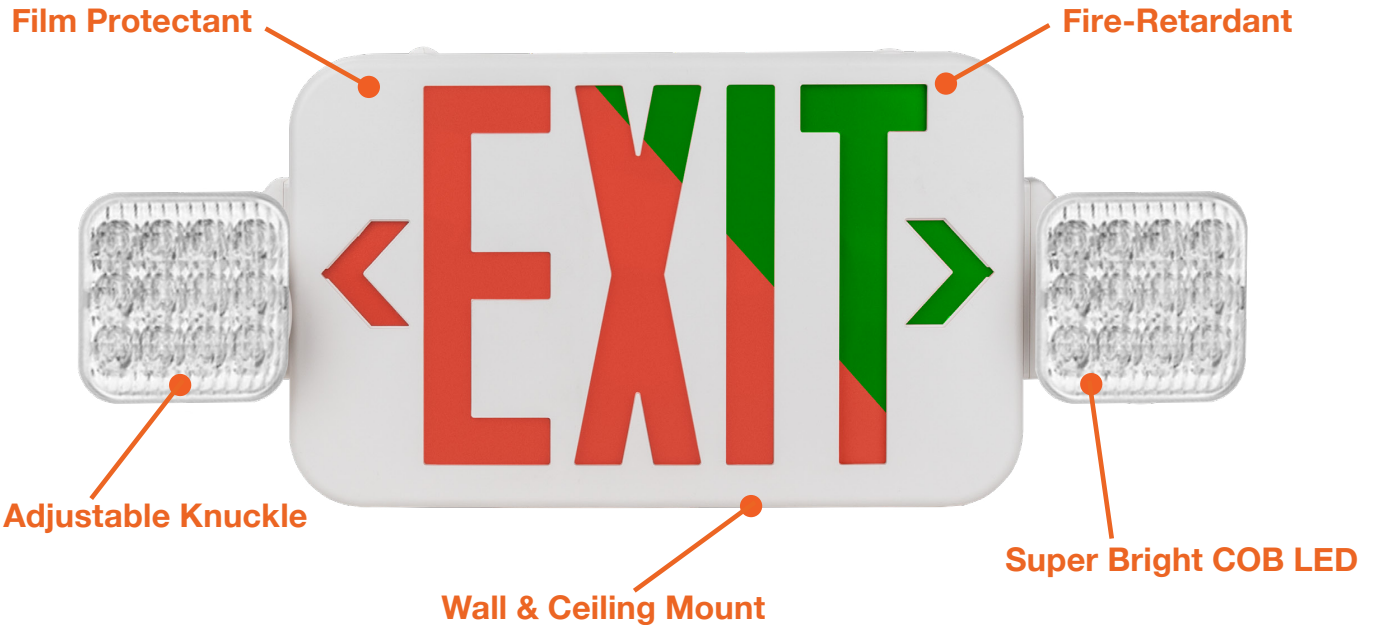


### DIMENSIONS

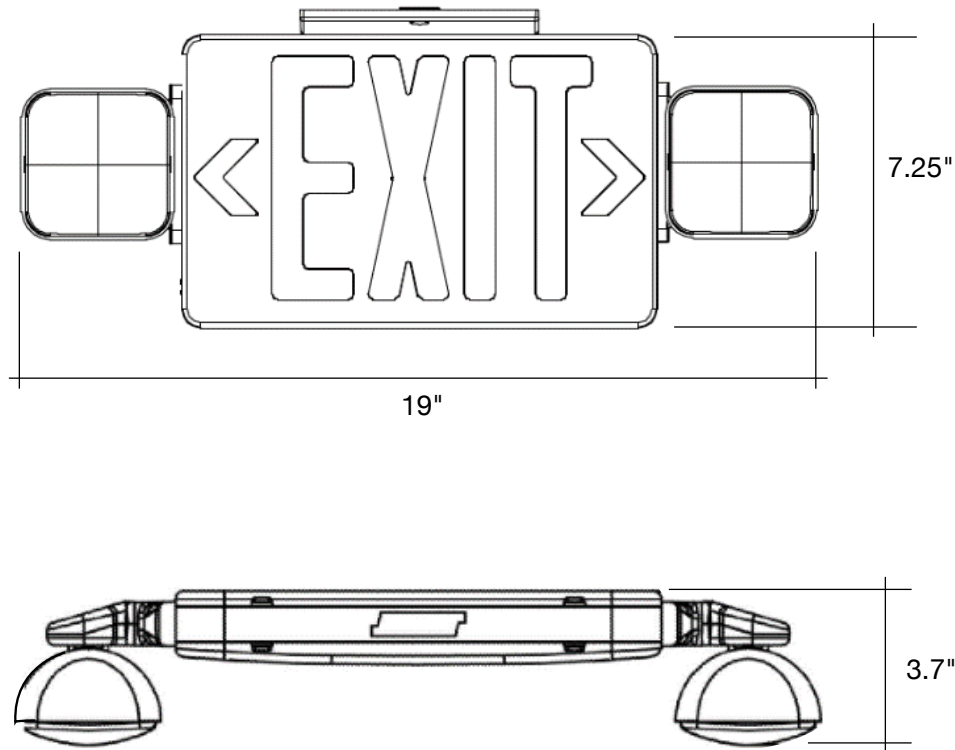

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

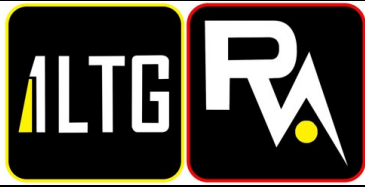

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-DH-HO

Line Item#: 57  
[Go to Bill of Materials](#)

Type: EM

Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Emergency Bug Eyes Square Models



Emergency



### Detail Specifications:

- Finish: White
- IP Rating: Dry Location
- Lumen Options
  - Standard: 3W 140LM
  - High Output: 6W 650LM
- Operating Temperature: -40° - 104° F
- Average life (L70) of 50,000 hours

### Applications:

- Exit Doors
- Corridor Intersections
- Exit Stairways
- Exit ramps

### Product Information:

- Built-in test switch and charge indicator light
- Overcharge and over-discharge protection
- Injection-molded thermoplastic housing, PC cover
- Backup Time: >90 minutes
- Recharge time: 24 hours

### Driver Options:

- Dual Voltage 120/277V
- PF >0.9, 50/60Hz
- Nickel Cadmium Battery 3.6V
- This fixture is non-dimmable

### Mounting & Installation:

- Wall and ceiling mounted
- Universal J-box mounting pattern

### Certifications:

- UL Listed for USA and CA (UL94V-0 Flame Rating)
- Meets UL924, NDPA 101
- Approved for CA T24
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

Series

**LED-EM-DH**

3W • 140Lm

**LED-EM-DH-HO**

6W • 650Lm

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 01.24





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-DH-HO

Line Item#: 57  
[Go to Bill of Materials](#)


Type: EM

Powered by 4submittal.com


**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Emergency Bug Eyes Square Models

### FEATURES

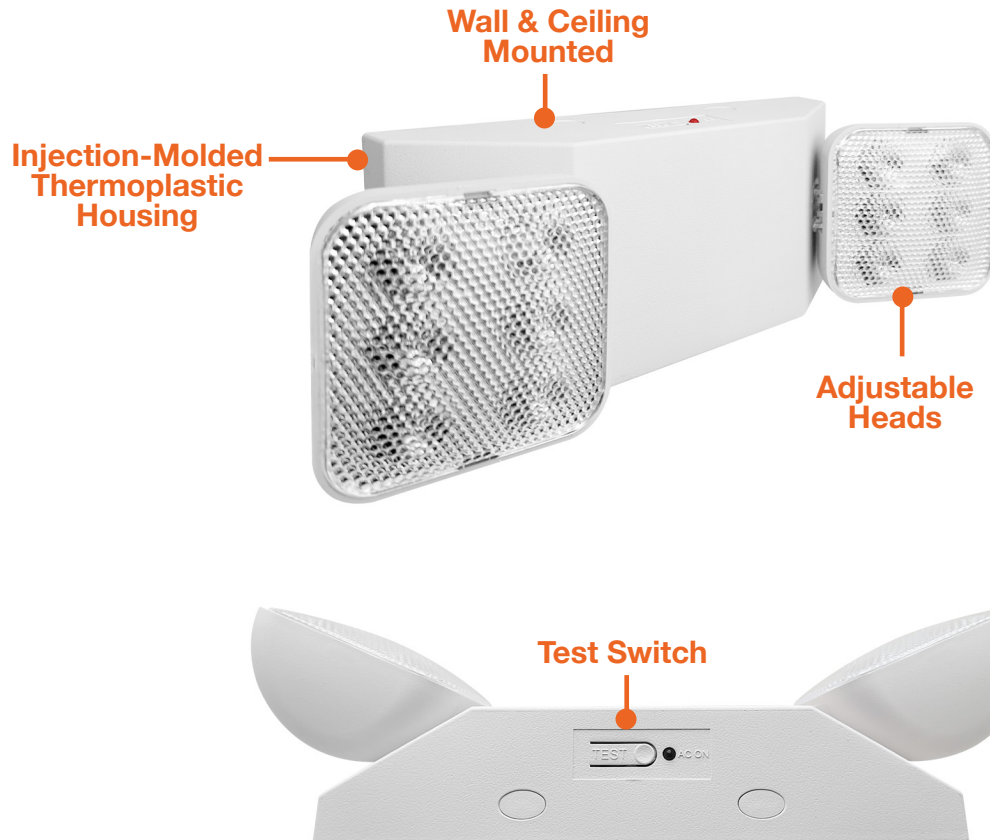

### DIMENSIONS

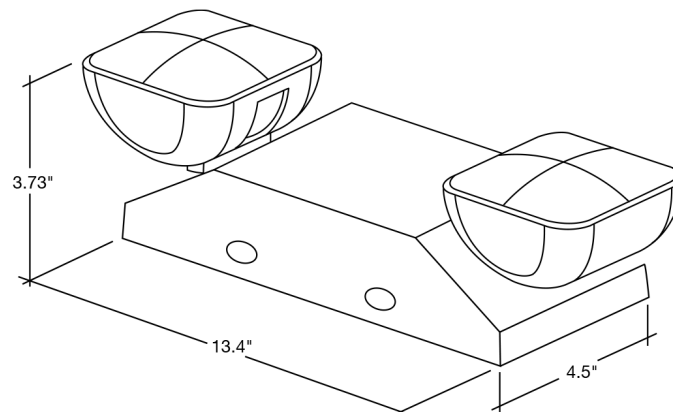


*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)



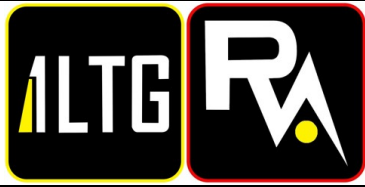

Date: 1/12/2026

Project:  
FINDLAY FLATSDescription:  
LED-CYE-UD-3-3P30-TRI-BL-PCLine Item#: 58  
[Go to Bill of Materials](#)

Type: WM1

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COMProject: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_

Area Lights



## M-Line: 3" Edge-Lit Cylinder Up/Down Light

### 3-CCT w/ Photocell



WATT	LUMENS
10	1,200
20	2,400
30	3,600

**Detail Specification:**

- Finish: Bronze, Black, White
- IP Rating: Wet Location IP65
- Beam Angle: 60°
- CCT: 30/40/50K Selectable
- Wattage: 30/20/10w
- Lumens: 3,600
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 122° F
- BUG: B2-U2-G2
- Lens: Clear glass with optics
- Average life (L70) of 50,000 hours

**Applications:**

- Dock and Loading
- Walkways & Pathways
- Parking Lots
- Hospitality, Multi-Family
- Outdoor Corridors
- General Outdoor Lighting
- Residential, Commercial and Industrial

**Product Information:**

- Sturdy die-cast aluminum housing finished with corrosion free powder coat
- Photocell included on each fixture. Easy disconnect.
- 1.5' STJW 18.3 AWG cable whip included
- Illuminates up and down and edge
- Select-n-Switch Technology: 3-CCT Selectable + 3-Power Selectable
- Instant-On to full brightness

**Driver Options:**

- UNV: 120-277V 0-10V Dimmable
- Built in 6Kv Surge Protector
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz

**Mounting & Installation:**

- Mounts to 3 or 4" J-box
- Covers a standard 4" recessed j-box

**Certifications:**


- UL Listed for USA and CA
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

**Series****LED-CYE-UD-3-3P30-TRI -**  
3" Up/Down Cylinder • 30/20/10W**Finish****BZ**  
Bronze  
**WH**  
White  
**BL**  
Black**Photocell****PC**  
Photocell  
is included.  
Easy quick  
disconnect.  
(PC-3/4-3PIN-LV)

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 10.23

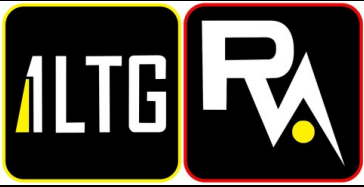

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-CYE-UD-3-3P30-TRI-BL-PC

Line Item#: 58  
[Go to Bill of Materials](#)

Type: WM1

Powered by 4submit.com


**EnVisionLED**<sup>TM</sup>  
WWW.ENVISIONLEDLIGHTING.COM

## M-Line: 3" Edge-Lit Cylinder Up/Down Light 3-CCT w/ Photocell

### FEATURES




### DIMENSIONS

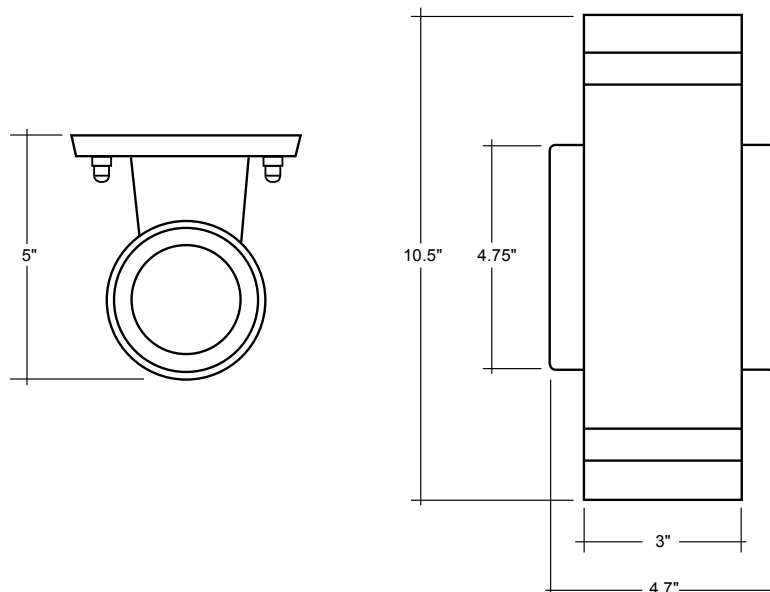

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

	<b>Date:</b> 1/12/2026	<b>Description:</b> SM160116BK	<b>Line Item#:</b> 59 <a href="#">Go to Bill of Materials</a>
	<b>Project:</b> FINDLAY FLATS		<b>Type:</b> WM5
			Powered by 4submit.com


Signlite | SM160116BK
 

Job Name:
 Job Type:
 Quantity:
 Comments:



PRODUCT DESCRIPTION

This classic design was originally used to illuminate signs but now is used as a nostalgic wall washer in residential and commercial applications. The polycarbonate shade is supported by an aluminum arm for maximum durability at a very affordable price.



\*height from center of outlet to the top of the fixture

MEASUREMENTS

DIMENSION	: 7.5" W x 13.75" H x 20.5" Ext
BACK PLATE	: 5" W x 5" H x 2.5" HCO
HANGING WEIGHT	: 1.17 lb
<b>LAMPING</b>	
INPUT VOLTAGE	: 120V
BULB	: 60W Incandescent E26 Medium , 60W Total
BULB INCLUDED	: (Not Included)
DIMMABLE	: Yes
LIGHTING_DIRECTION	: Down

FINISHES OPTION

- Black (BK)

MATERIAL

Polycarbonate, Aluminum

RATINGS

cETLus  
Wet Location



ADDITIONAL


INSTALL UP/DOWN: Down  
OPERATING TEMPERATURE:  
-20°C (-4°F), 40°C (104°F)

Always consult a qualified electrician before installing any lighting product.

STUDIO•M

Modifications or Customizations: Please email [contract@studiomlighting.com](mailto:contract@studiomlighting.com)  
 Sample Request: Please email [order@studiomlighting.com](mailto:order@studiomlighting.com) with subject line "Sample Order\_ [Project Name] / [Specifier/Designer]"  
 All samples are subject to Studio M approval and must show proof of project and/or explanation.

Job Name:	Job Type:
Quantity:	Comments:

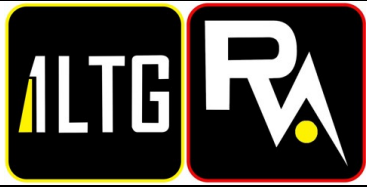

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-FLM-A19-8.5W-30K-D-JA8

Line Item#: 60  
[Go to Bill of Materials](#)


Type: WM5 LAMP

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## A-19 Bulb Filament Series

LED Bulbs

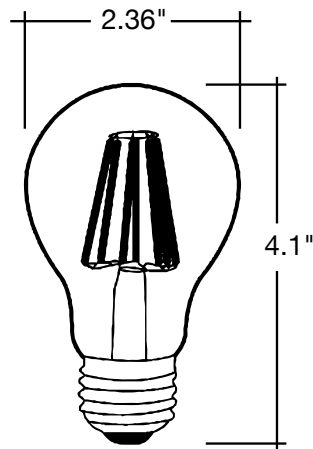

### Detail Specifications

- IP Rating: Damp Location
- Beam Angle: Omni-Directional 360°
- Chip: Filament, R9- 78, CRI >90
- Operating Temperature: -4° - 114° F
- Average life (L70) of 25,000 hours

### Applications:

- Decorative Lighting
- Interior Lighting
- Table & Floor Lamps
- Showcases
- Residential, Multi-Family, Commercial

### Product Information:

- Suitable for use in existing fixtures
- Instant-On to full brightness

### Driver Options:

- 120V
- Triac Dimmable
- PF >0.9, 50/60Hz

### Mounting & Installation:

- E26 Socket
- Direct A Lamp Replacement

### Certifications:

- UL Listed for USA and CA
- Energy Star
- Title 20 and JA8-2022 Approved (8.5W Model Only)
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

### Dimmer List:

Leviton	6674
Lutron	LGCL-153P
Lutron	DVCL-153P
Lutron	CTCL-153P
Lutron	MAELV-300

### Series

**LED-FLM-A19-8.5W-30K-D-JA8**

550 Lumens 60W Equivalent

**LED-FLM-A19-10W-27K**


1,000 Lumens 100W Equivalent

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 10.23

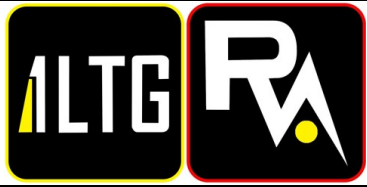

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-RC-1

Line Item#: 61  
[Go to Bill of Materials](#)

Type: RH1

Powered by 4submittal.com



Project: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_



## Single/Double Remote Head

### Product Information:

- Injection-Molded Thermoplastic ABS Housing
- 320 Lumens
- UL-940V-0 Flame Rating
- Wall and Ceiling Mounting
- Input Voltage: 3.6-24 VDC
- Super Bright SMD LED 2.4W
- IP Class: IP65
- Insulation: Class II
- Operating Temperature: 0°F ~ 104° F
- Remote Capable
- Compatible with but Not Limited to  
LED-EM-EXT-G-WH-CMB-RC  
or LED-EM-EXT-R-WH-CMB-R
- 5 Year Limited Warranty



Product Head  
LED-EM-RC-1


**1 Product**  
LED-EM-RC Remote Head

**2 Head**  
Single 1  
Double 2

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)







Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-RC-1

Line Item#: 61  
[Go to Bill of Materials](#)

Type: RH1

Powered by 4submittal.com


**EnVisionLED™**

## Single/Double Remote Head

### FEATURES



### FEATURES

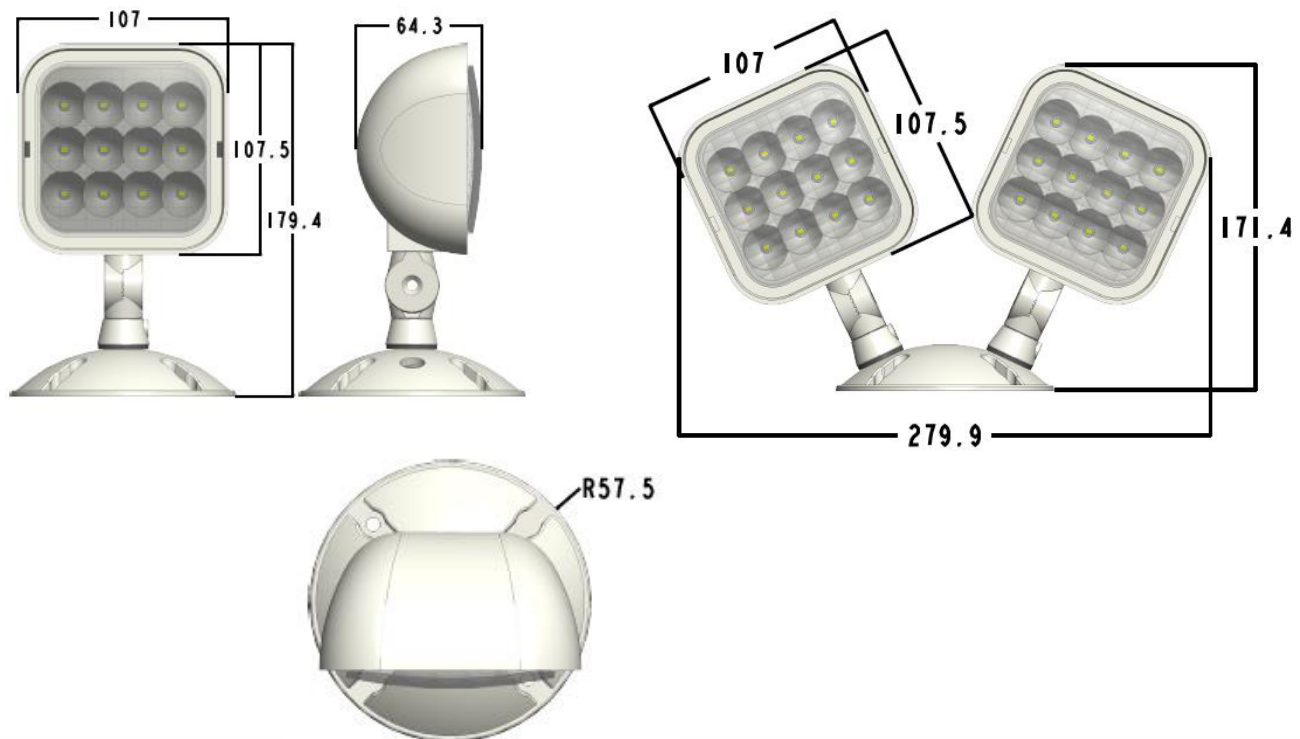

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)





Date: 1/12/2026

Project:  
FINDLAY FLATSDescription:  
LED-BPL-2X2-3M40-5CCTLine Item#: 62  
[Go to Bill of Materials](#)


Type: SM8

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## LED Panels: BackLit Line

### 5-CCT & 3-Power Selectable

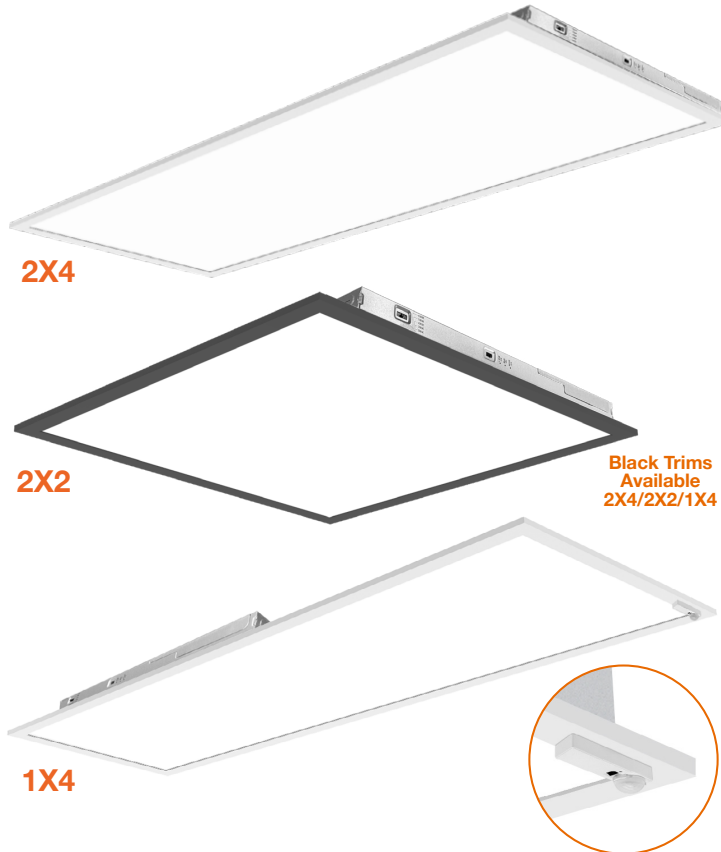

2X4

2X2

1X4

Black Trims  
Available  
2X4/2X2/1X4Shown with  
Sensor Option**Regular Versions**

WATT	LUMENS
20	2,200
30	3,300
40	4,400
50	5,500

**HL Versions**

WATT	LUMENS
30	3,750
40	5,000
45	5,625
50	6,250
55	6,875
65	8,125

**Detail Specifications:**

- Finish: White, Custom finishes available
- IP Rating: Damp Location (IP44)
- 5CCT: 30/35/40/50/65K
- Beam Angle: 110°
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 114° F
- Lens: PS (polystyrene) frosted, non-yellowing, & shatter resistant
- Average life (L70) of 50,000 hours
- IC Rated

**Applications:**

- General Indoor Lighting
- Utility & Storage
- Garage Structures
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality
- Commercial and Industrial

**Product Information:**

- Metal housing finished with corrosion free power coat
- Even light distribution
- Lightweight for easier installation
- Select-n-Switch Technology: 5-CCT + 3-Power Selectable
- Control Options:
  - Standard Sensors
  - SILVAIR Bluetooth Mesh
  - ENVISIONLS Bluetooth
  - [Click Here](#) for More Information

**Driver Options:**

- UNV: 120-277V 0-10V Dimmable (Dim to Off)
- Optional 347-480V step down transformer available
- Standard EMB used:
  - 40W: 8W EMB ([LED-EMB-8W-HV-0-10V-2P](#))
  - 50W: 15W EMB ([LED-EMB-15W-HV-0-10V-2P](#))
- Higher wattage emb (up to 25W) available by request. Pricing will vary.
- THD: <15% (+/-5% tolerance), PF >0.9, 50/60Hz
- Isolated Driver
- Flicker Free

**Mounting & Installations:**

- Lay-in ceilings for 5/8" and 3/8" ceiling widths
- Built-in earthquake clips
- Optional 9' suspension kit available
- Optional surface mount, drywall kit available
- Use surface mount and suspension kit for an aesthetically pleasing design

**Certifications:**

- ETL Listed for USA and CA
- DLC Listed/ DLC Premium Listed (HL Versions)
  - View DLC ID Chart below
- NSF Rated
- Approved for CA T24
- 5 Year Limited Warranty

Series	Sensor	Emergency	Driver <sup>1</sup>	Whip
LED-BPL-2X2-3M40-5CCT	(blank)	(blank)	(blank)	(blank)
20/30/40W	No Sensor	No	120-277V	No Whip
LED-BPL-2X2-3M50-5CCT-HL	SR	Emergency	HV	-6FLX
30/40/50W	Sensor Ready	Emergency	347-480V	6' Flex
LED-BPL-2X4-3M50-5CCT	(See sensor options)	Backup	Stepdown	
30/40/50W				
LED-BPL-2X4-3M65-5CCT-HL				
45/55/65W				
LED-BPL-1X4-3M40-5CCT				
20/30/40W				

1. HV: High voltage is made to order.

**Optional Accessories (Order Separately)**

Sensors	Suspension Kits	Surface Mount Kits	Drywall Kits	Color Trims
<b>S-AUD-PIR-1</b> PIR Bi-Level Motion + Daylight Sensor Remote Required: (S-LINE-R)	<b>SK-10FT-Y-LC-CB</b> 10' Suspension Kit	<b>2X2-SM-3"</b> 3" Height	<b>LED-PNL-2X2-FLNG</b> 2x2 Black Trim	<b>BPL-2X2-TRIM-BL</b>
<b>S-AUD-PIR-BT</b> PIR ENVISIONLS Bluetooth Control	<b>SK-20FT-Y-LC-CB</b> 20' Suspension Kit	<b>2X4-SM-3"</b> 3" Height	<b>LED-PNL-1X4-FLNG</b> 1x4 Black Trim	<b>BPL-2X4-TRIM-BL</b>
<b>S-AUD-PIR-SL</b> PIR SILVAIR Bluetooth Mesh	<b>CK-6FT-V</b> 6' Chain Hanging Kit	<b>1X4-SM-3"</b> 3" Height		<b>BPL-1X4-TRIM-BL</b>


1. Custom height options available. Contact us.

Specs and model numbers are subject to change with or without notice. Customization of product is available.

**EnVision LED Lighting, Inc.**6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 12.24



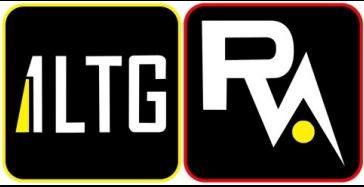

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-BPL-2X2-3M40-5CCT

Line Item#: 62  
[Go to Bill of Materials](#)

Type: SM8


Powered by 4submit.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM


## LED Panels: BackLit Line


### 5-CCT & 3-Power Selectable

#### FEATURES

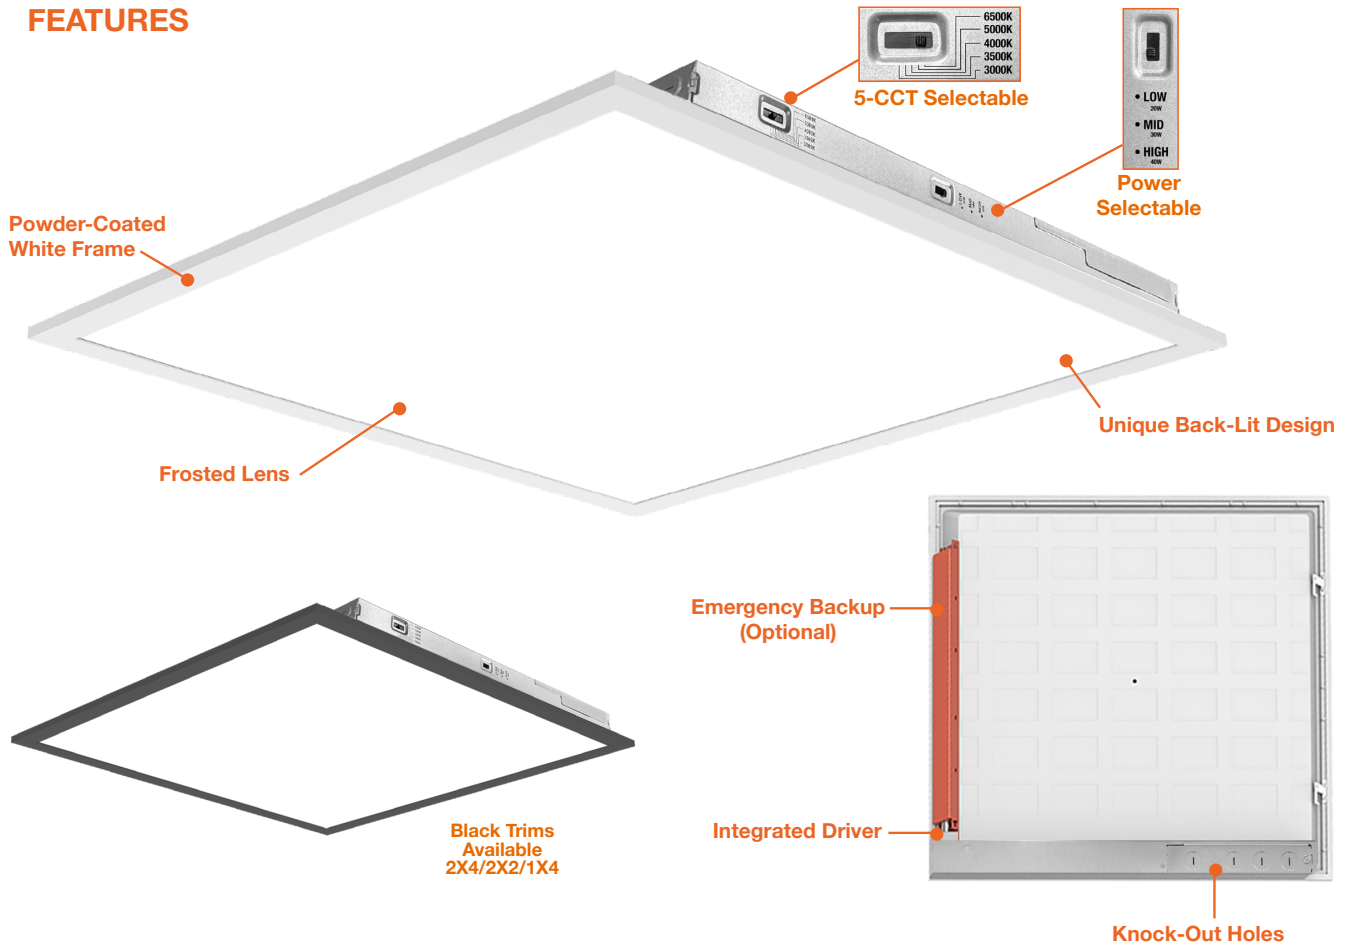

#### DIMENSIONS

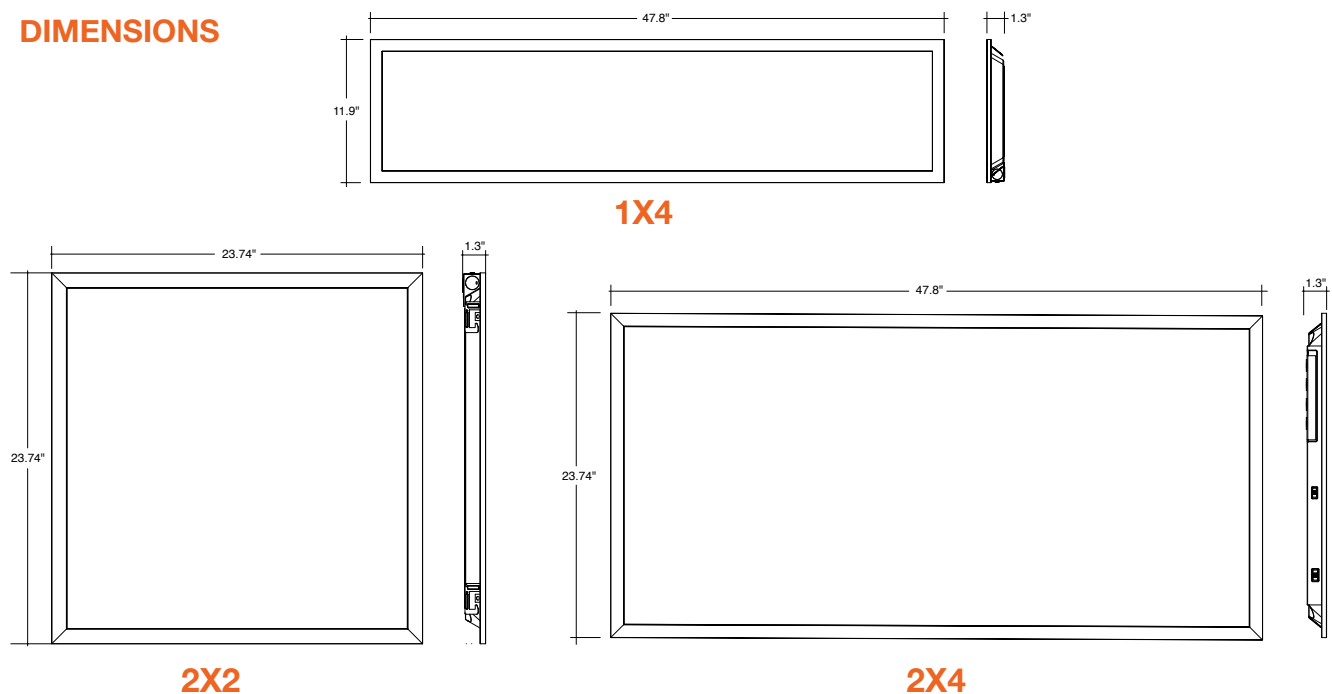

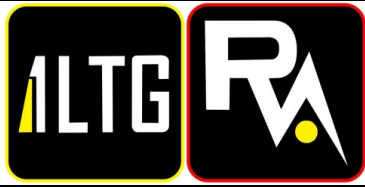

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-BPL-2X2-3M40-5CCT

Line Item#: 62  
[Go to Bill of Materials](#)

Type: SM8

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## LED Panels: BackLit Line 5-CCT & 3-Power Selectable

### ACCESSORIES






SK-10FT-Y-LC-CB  
SK-20FT-Y-LC-CB



CK-6FT-V



S-AUD-PIR-1  
S-AUD-PIR-BT  
S-AUD-PIR-SL

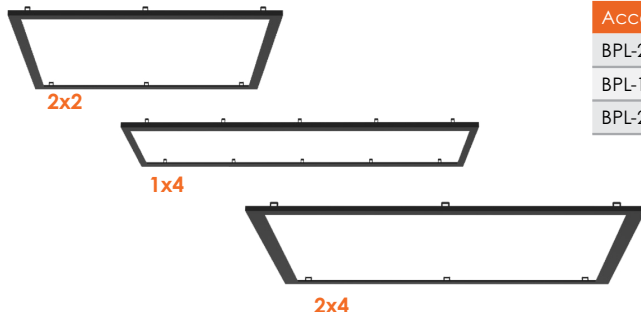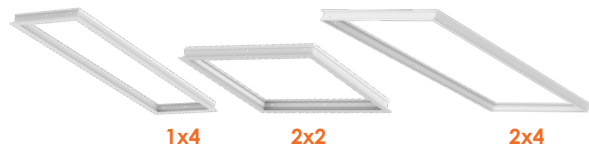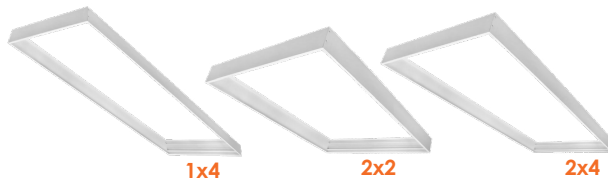

Model	Voltage	Watts	Lumens	Color	CRI
LED-BPL-2X2-3M40-5CCT	120/277V	20/30/40w	2600/3900/4400	30/35/40/50/65k	>80
LED-BPL-2X2-3M50-5CCT-HL	120/277V	30/40/50w	3900/4400/5500	30/35/40/50/65k	>80
LED-BPL-2X4-3M50-5CCT	120/277V	30/40/50w	3900/4400/5500	30/35/40/50/65k	>80
LED-BPL-2X4-3M65-5CCT-HL	120/277V	45/55/65w	5625/6875/8125	30/35/40/50/65k	>80
LED-BPL-1X4-3M40-5CCT	120/277V	20/30/40w	2600/3900/4400	30/35/40/50/65k	>80

### SUSPENSION KITS

Accessory	Description
SK-10FT-Y-LC-CB	10' Suspension Kit
SK-20FT-Y-LC-CB	20' Suspension Kit
CK-6FT-V	6' Chain Hanging Kit
LED-PNL-2X4-SK	3.5' Suspension Kit, works for all sizes

### SENSORS

Accessory Model	Description
S-AUD-PIR-1	PIR Bi-Level Motion + Daylight Sensor Remote Required: (S-LINE-R)
S-AUD-PIR-BT	PIR ENVISIONLS Bluetooth Control
S-AUD-PIR-SL	PIR SILVAIR Bluetooth Mesh

### SURFACE MOUNT KITS

Accessory	Description
2X2-SM-3"	2X2 Surface Mount Kit 3" Height for all Panels and Troffers
2X4-SM-3"	2X4 Surface Mount Kit 3" Height for all Panels and Troffers
1x4-SM-3"	1X4 Surface Mount Kit 3" Height for all Panels and Troffers

### DRYWALL KITS

Accessory	Description
LED-PNL-2X2-FLNG	Flange (Drywall) Kit for Panels for all 2X2 Fixtures
LED-PNL-2X4-FLNG	Flange (Drywall) Kit for Panels for all 2X4 Fixtures
LED-PNL-1X4-FLNG	Flange (Drywall) Kit for Panels for all 1X4 Fixtures

### TRIMS


Accessory	Description
BPL-2X2-TRIM-BL	2x2 LED Panel: Backlit-Line Black Trim
BPL-1X4-TRIM-BL	1x4 LED Panel: Backlit-Line Black Trim
BPL-2X4-TRIM-BL	2x4 LED Panel: Backlit-Line Black Trim

Luminaires for Ambient Lighting of - DLC Product ID:

LED-BPL-2x2-3M40-5CCT	S-IMBE52 (Standard)
LED-BPL-2x4-3M50-5CC	S-U0267J (Standard)
LED-BPL-1x4-3M40-5CCT	S-DR8V2E (Standard)
LED-BPL-2x2-3M50-5CCT-HL	S-V26054 (Standard)
LED-BPL-2x4-3M65-5CCT-HL	S-WNV8KG (Premium)

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

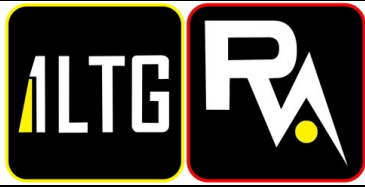

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-BPL-2X2-3M40-5CCT









Line Item#: 62  
[Go to Bill of Materials](#)

Type: SM8


Powered by 4submittal.com

## EnVisionLED™ Control Options

EnVision LED offers 3 control systems compatible with our LED Fixtures for projects of all sizes and budgets.

	Basic Controls	EnVisionLS 	EnVisionLED™ x SILVAIR 
<b>Description</b>	Standard Plug In Sensors	Basic Bluetooth Wireless Control	Advanced Bluetooth Wireless Control
<b>Recommended Quantity</b> (but not limited to)	N/A	>40-50 Nodes	>50 Nodes
<b>Maximum Zone Quantity</b>	N/A	100	3,000
<b>Commissioning Tool</b>	Remote Only	  ENVISIONLS App 	  SILVAIR App 
<b>Commissioning Process</b>	Individually Set via Remote	Wireless Must be done on site	Wireless- Initial linking must be done on site. Commissioning can be done via desktop remotely.
<b>Floor Plan Upload</b>	N/A	N/A	Yes Add a floor plan and mark luminaires & zones via desktop
<b>Gateway</b>	N/A	N/A	Required only for energy monitoring, advanced scheduling, automated demand response.
<b>Individual Luminaire Control</b>	Yes	Yes	Yes
<b>Luminaire Grouping Zoning</b>	N/A	Yes	Yes
<b>High End Power Low End Power</b>	Yes but limited (View Remote)	Yes	Yes
<b>Cost</b>	\$	\$\$	\$\$\$
<b>DLC NLC Listed</b>	N/A	Yes	Yes
<b>Energy Monitoring &amp; Data Reporting</b>	N/A	N/A	Monitor energy usage per individual zone & retrofit cost savings calculation + detailed reporting



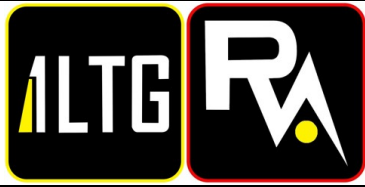

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-BPL-2X2-3M40-5CCT

Line Item#: 62  
[Go to Bill of Materials](#)

Type: SM8

Powered by 4submittal.com





## Compatible Products:

EnVision offers a variety of nodes, sensors, & gateways that are controlled via remote, ENVISIONLS Bluetooth Mesh & SILVAIR Bluetooth Mesh on all of our 0-10V dimmable fixtures.






### Individual Fixture Controls: PIR Sensor, Bi-Level Dimming, Daylight


Basic Note: -1 • ENVISIONLS Models Note: -BT • SILVAIR Models Note: -SL


	MODEL #	DESIGN	RECOMMENDED FIXTURE	FEATURES
	S-TWC-PIR-1 S-TWC-PIR-BT S-TWC-PIR-SL	Twist-C Control Sensor	Sensor Ready Fixtures: Area Lights, Canopies, Flood Lights, High Bays	All models are equipped with PIR occupancy sensing, high & low end bi-level dimming, & daylight sensing.
	S-TWC-90 + S-TWC-PIR-1 S-TWC-90 + S-TWC-PIR-BT S-TWC-90 + S-TWC-PIR-SL	Twist-C Control Sensor + 90 Degree Arm	Cylinders, Strips, Wall Packs	
	S-AUD-PIR-1 S-AUD-PIR-BT S-AUD-PIR-SL	2.5m Audio Jack	Panels & Troffers	
	S-SN-PIR-1 S-SN-PIR-BT S-SN-PIR-SL	Snap In Sensor	Troffers & Wraps	

### Group Controls ENVISIONLS Models Note : -BT • SILVAIR Models Note: -SL

	MODEL #	DESIGN	VOLTAGE	FEATURES	RECOMMENDED FEATURES
	S-CM-PIR-LV-BT S-CM-PIR-LV-SL	Ceiling Mounted PIR Sensor	12-24V	PIR Sensor, Bi-Level Dimming, Daylight, 360° detection, 12' Max Mounting Height	Connects to 0-10V dimmable fixtures
	S-WM-PIR-CUNV-BT S-WM-PIR-CUNV-SL	Wall Mounted PIR Occupancy Sensor, Bi-Level Dimming, Daylight	120-277V	On/Off PIR occupancy sensor, 180° detection, 30' detection @ 4' Mounting Height	Connects to LED fixtures
	S-WS-120V-USB-SL		120V	Dimming Wall Socket, Two Sockets	Floor Lamps, Other Lamps

### Gateway (Silvaire Only) 4.5–5.5 V DC, 2A Power over Ethernet 36–57 V DC

	MODEL #	DESIGN	VOLTAGE	FEATURES	RECOMMENDED FEATURES
	SGW-102	Wall or Ceiling Mounted	POE	Advanced Energy Monitoring Control	Connects to Silvaire Controls. Gateway is not required.

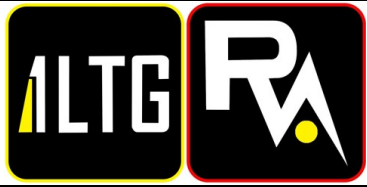

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 63  
[Go to Bill of Materials](#)

Type: SM3

Powered by 4submittal.com




LIGHTING | REINVENTED

plano **ARCH** PRO

## LDLL | Eclipse-II

Product Data Sheet

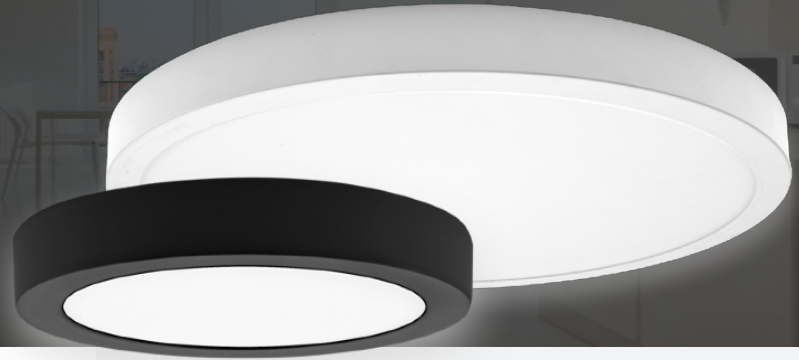

COMMERCIAL-GRADE

### LED Surface Mount Puck Downlight



CCTselect



TruColor Rendering

5" / 7" / 9" / 11" / 13"

#### Product Overview

**INTENDED USE** — The Eclipse-II Series is built for 5-way switchable CCT and is suitable for use in dry, damp, and wet locations, perfect for use in kitchens, hallways, stairways, bathrooms, closets, and just about anywhere you'd need it.

**CONSTRUCTION** — The die-cast aluminum housing is designed for durability and ruggedness.

**INSTALLATION** — Quick-mount aluminum backplate for easy installation.

**WARRANTY** — Featuring a no-compromise 5-year warranty, Energy Star and JA8-compliant, the Eclipse-II is a clean and modern solution for surface mounted driverless design.

ARCHIPELAGO luminaires and LED components undergo rigorous testing by an independent laboratory to meet IESNA LM-79 and LM-80 standards for light output and lumen maintenance. LED color temperature is warranted to shift no more than 180K over the standard warranty period. Correlated Color Temperature (CCT) follows the guidelines set forth in the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

#### Applications



Residential



Hallway



Patio



Entryway

#### Main Features

- Low-Profile Edge-Lit Surface Mount Design
- Durable Di-Cast Aluminum Trim w/ Frosted Lens
- For New Construction or Retrofit Applications
- Suitable for Use in Dry, Damp and Wet Locations
- Suitable for Use in Closets, In Accordance to NEC Guidelines
- Installs on Ceiling and Standard Junction Boxes
- Dimmable to 10% on Compatible TRIAC Dimmers
- 5-Year, 50,000 Hr Warranty
- CEC T24 JA8 Compliant
- NEC Compliant, Suitable for Use in Closet
- Energy Star Certified for 5", 7", 9"

#### Product Warranty\*

5-Year Warranty



50,000 Hrs



\* Standard warranty. Extended warranty available.

Archipelago Lighting, Inc.


| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

[Contact Us](#)





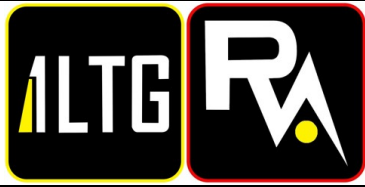

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 63  
[Go to Bill of Materials](#)

Type: SM3

Powered by 4submittal.com



LDLL | Eclipse-II

**Low-Glare Lens**  
Smooth diffused light output.

**Driverless**  
Minimizes installation height.

**IP54**  
Suitable for damp locations.

**Solid Backplate**  
Passive heat dissipation.

**Edge-Lit Technology**  
Even and uniform light distribution.

**PMMA Lens**  
Durable, no-yellowing lens.



#### Ordering Guide<sup>1</sup>

Model Series	Size (in) / Wattage (W)		Series	CCTselect (K)	Finish Color
<b>LDLL</b> LED Surface Mount Puck Downlight	<b>0510</b> 5inch / 10W <b>0715</b> 7inch / 15W <b>0918</b> 9inch / 18W <b>1121</b> 11inch / 21W <b>1324</b> 13inch / 24W	-	<b>E2</b> Eclipse-II	<b>S5</b> 5-CCTselect: 2700K 3000K 3500K 4000K 5000K	/ <b>B</b> Black <b>W</b> White
<b>CATALOG #:</b>					
<b>LDLL</b>		-	<b>E2</b>	<b>S5</b>	/

#### Options Guide<sup>2</sup>

EM Driver <sup>3</sup>	Motion Sensor
<input type="checkbox"/> <b>EM15</b> 15W EM Driver <input type="checkbox"/> <b>CRCU</b> 15W EM Driver with Junction Box	<input type="checkbox"/> <b>MSP/W</b> PIR Bi-Level Sensor for 7" and 9" ONLY (White Finish)
<b>OPTIONAL ACCESSORIES #:</b>	
	/

**NOTE:**

- Only one selection may be applicable within the same category.
- Multiple selections may be applicable within the same option category. See Compatible Accessories below for details.
- EM drivers only work with 7, 9, 11 and 13in fixtures

#### Archipelago Lighting, Inc.

| **Headquarter:** 4615 State Street, Montclair, CA 91763


| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

#### Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220








	Date: 1/12/2026	Description: LDLL0510-E2S5/W	Line Item#: 63
	Project: FINDLAY FLATS		<a href="#">Go to Bill of Materials</a>
			Type: SM3
Powered by 4submittal.com			



LDLL | Eclipse-II

Sizing & Measurements


Model Series	Dimensions	Overall Diameter (in)	Depth (IN)
LDLL0510-E2		5.51	0.79
LDLL0715-E2		7.48	0.82
LDLL0918-E2		8.86	0.79
LDLL1121-E2		10.98	0.98
LDLL1124-E2		12.80	0.98

Recommended Dimmers

Make	Models			
Lutron	TG-600PR-WH S-600PR-WH CTCL-153PDH-WH	TGCL-153PH-LA SLV-600P-AL DV-600PR-WH	SCL-153PH-WH GT-600P DVCL-153P	MSCL-OP153M MACL-153M//MA-R PD-6WCL
Leviton	6672 IPL06	6674	DSL06	RNL06

Accessories (Standard)

Accessories (Optional)



<b>Mounting Bracket</b>	<b>Wire Nuts</b>	<b>Bolts</b>	<b>15W EM Driver</b>	<b>PIR Bi-Level Sensor</b>
Compatible to 2.75" or 3.50" Junction Box			EM15-HMB/170DC CRCU-EM/JBM	LDLL-E2/MSP/W

Archipelago Lighting, Inc.

| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 63  
[Go to Bill of Materials](#)


Type: SM3


Powered by 4submittal.com



LDLL | Eclipse-II

EM Driver / J-Box (Optional)

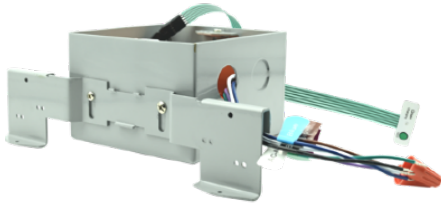

Technical Specification	CRCU-EM/JBM
Emergency Power	15W Max
Installation Method	Recessed
IP Rating	IP20
CEC T.24/JA8 Compliant	Yes
Color Finish	Grey
Physical Features	<ul style="list-style-type: none"><li>Directly connect to AC input</li><li>Fits 2.75" and 3.5" J-Box</li><li>Supports recessed in-ceiling mount</li></ul>
Self-Diagnostic Test Switch	<ol style="list-style-type: none"><li>Emergency conversion kit will go into emergency mode when test switch is pressed while main power is ON.</li><li>Will go into charging mode if test switch is not pressed.</li><li>In emergency mode, pressing the test switch for 3-seconds will inactivate emergency mode.</li></ol>
Indicator Status Light	<ol style="list-style-type: none"><li>Green ON: Charging mode / charging full</li><li>Green OFF: Mains power OFF / discharging mode</li></ol>
Dimension	<p>W4.29in x H2.96</p> 

Archipelago Lighting, Inc.


| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220

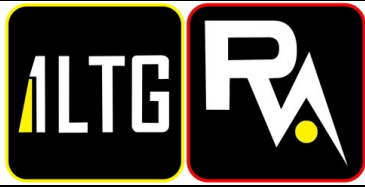

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 64  
[Go to Bill of Materials](#)

Type: SM1

Powered by 4submittal.com




LIGHTING | REINVENTED

plano **ARCH** PRO

## LDLL | Eclipse-II

Product Data Sheet

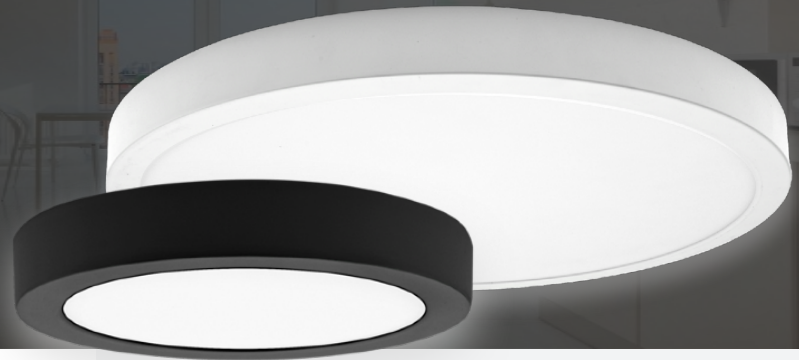

COMMERCIAL-GRADE

### LED Surface Mount Puck Downlight



CCTselect



TruColor Rendering

5" / 7" / 9" / 11" / 13"

#### Product Overview

**INTENDED USE** — The Eclipse-II Series is built for 5-way switchable CCT and is suitable for use in dry, damp, and wet locations, perfect for use in kitchens, hallways, stairways, bathrooms, closets, and just about anywhere you'd need it.

**CONSTRUCTION** — The die-cast aluminum housing is designed for durability and ruggedness.

**INSTALLATION** — Quick-mount aluminum backplate for easy installation.

**WARRANTY** — Featuring a no-compromise 5-year warranty, Energy Star and JA8-compliant, the Eclipse-II is a clean and modern solution for surface mounted driverless design.

ARCHIPELAGO luminaires and LED components undergo rigorous testing by an independent laboratory to meet IESNA LM-79 and LM-80 standards for light output and lumen maintenance. LED color temperature is warrantied to shift no more than 180K over the standard warranty period. Correlated Color Temperature (CCT) follows the guidelines set forth in the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

#### Applications



Residential



Hallway



Patio



Entryway

#### Main Features

- Low-Profile Edge-Lit Surface Mount Design
- Durable Di-Cast Aluminum Trim w/ Frosted Lens
- For New Construction or Retrofit Applications
- Suitable for Use in Dry, Damp and Wet Locations
- Suitable for Use in Closets, In Accordance to NEC Guidelines
- Installs on Ceiling and Standard Junction Boxes
- Dimmable to 10% on Compatible TRIAC Dimmers
- 5-Year, 50,000 Hr Warranty
- CEC T24 JA8 Compliant
- NEC Compliant, Suitable for Use in Closet
- Energy Star Certified for 5", 7", 9"

#### Product Warranty\*

5-Year Warranty



50,000 Hrs



\* Standard warranty. Extended warranty available.

Archipelago Lighting, Inc.

| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

[Contact Us](#)





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W


Line Item#: 64  
[Go to Bill of Materials](#)

Type: SM1

Powered by 4submittal.com



LDLL | Eclipse-II

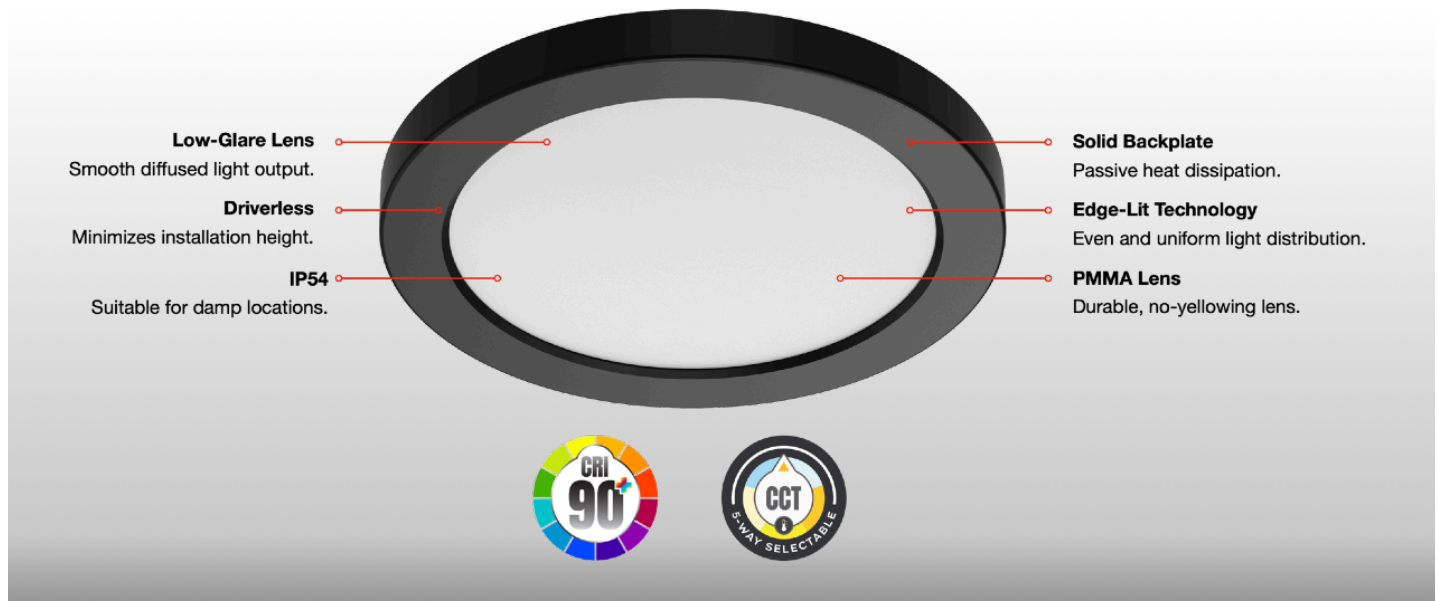

#### Ordering Guide<sup>1</sup>

Model Series	Size (in) / Wattage (W)	Series	CCTselect (K)	Finish Color
<b>LDLL</b> LED Surface Mount Puck Downlight	<b>0510</b> 5inch / 10W <b>0715</b> 7inch / 15W <b>0918</b> 9inch / 18W <b>1121</b> 11inch / 21W <b>1324</b> 13inch / 24W	- <b>E2</b> Eclipse-II	<b>S5</b> 5-CCTselect: 2700K 3000K 3500K 4000K 5000K	/ <b>B</b> Black <b>W</b> White
<b>CATALOG #:</b>				
<b>LDLL</b>		- <b>E2</b>	<b>S5</b>	/

#### Options Guide<sup>2</sup>

EM Driver <sup>3</sup>	Motion Sensor
<input type="checkbox"/> <b>EM15</b> 15W EM Driver <input type="checkbox"/> <b>CRCU</b> 15W EM Driver with Junction Box	<input type="checkbox"/> <b>MSP/W</b> PIR Bi-Level Sensor for 7" and 9" ONLY (White Finish)
<b>OPTIONAL ACCESSORIES #:</b>	

NOTE:

- Only one selection may be applicable within the same category.
- Multiple selections may be applicable within the same option category. See Compatible Accessories below for details.
- EM drivers only work with 7, 9, 11 and 13in fixtures

Archipelago Lighting, Inc.


| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)






+1 (866) 912-3220

	Date: 1/12/2026	Description: LDLL0510-E2S5/W	Line Item#: 64
	Project: FINDLAY FLATS		<a href="#">Go to Bill of Materials</a>
			Type: SM1
Powered by 4submittal.com			



LDLL | Eclipse-II

Sizing & Measurements


Model Series	Dimensions	Overall Diameter (in)	Depth (IN)
LDLL0510-E2		5.51	0.79
LDLL0715-E2		7.48	0.82
LDLL0918-E2		8.86	0.79
LDLL1121-E2		10.98	0.98
LDLL1124-E2		12.80	0.98

Recommended Dimmers

Make	Models			
Lutron	TG-600PR-WH S-600PR-WH CTCL-153PDH-WH	TGCL-153PH-LA SLV-600P-AL DV-600PR-WH	SCL-153PH-WH GT-600P DVCL-153P	MSCL-OP153M MACL-153M//MA-R PD-6WCL
Leviton	6672 IPL06	6674	DSL06	RNL06

Accessories (Standard)

Accessories (Optional)



<b>Mounting Bracket</b>	<b>Wire Nuts</b>	<b>Bolts</b>	<b>15W EM Driver</b>	<b>PIR Bi-Level Sensor</b>
Compatible to 2.75" or 3.50" Junction Box			EM15-HMB/170DC CRCU-EM/JBM	LDLL-E2/MSP/W

Archipelago Lighting, Inc.

| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 64  
[Go to Bill of Materials](#)


Type: SM1


Powered by 4submittal.com



LDLL | Eclipse-II

EM Driver / J-Box (Optional)

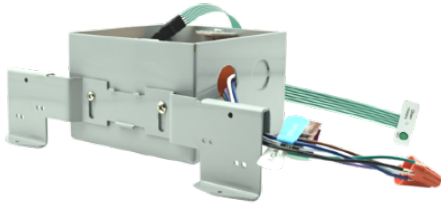

Technical Specification	CRCU-EM/JBM
Emergency Power	15W Max
Installation Method	Recessed
IP Rating	IP20
CEC T.24/JA8 Compliant	Yes
Color Finish	Grey
Physical Features	<ul style="list-style-type: none"><li>Directly connect to AC input</li><li>Fits 2.75" and 3.5" J-Box</li><li>Supports recessed in-ceiling mount</li></ul>
Self-Diagnostic Test Switch	<ol style="list-style-type: none"><li>Emergency conversion kit will go into emergency mode when test switch is pressed while main power is ON.</li><li>Will go into charging mode if test switch is not pressed.</li><li>In emergency mode, pressing the test switch for 3-seconds will inactivate emergency mode.</li></ol>
Indicator Status Light	<ol style="list-style-type: none"><li>Green ON: Charging mode / charging full</li><li>Green OFF: Mains power OFF / discharging mode</li></ol>
Dimension	<p>W4.29in x H2.96</p> 

Archipelago Lighting, Inc.

| Headquarter: 4615 State Street, Montclair, CA 91763


| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220



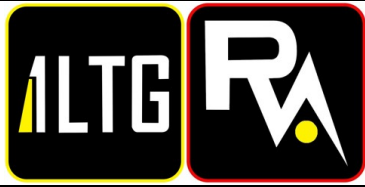

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-VT-ADJ-24-21W-5CCT-BN

Line Item#: 65  
[Go to Bill of Materials](#)


Type: V1

Powered by 4submittal.com

**EnVisionLED**<sup>TM</sup>  
WWW.ENVISIONLEDLIGHTING.COM

## Vanity Fixtures

### Square Adjustable Swivel

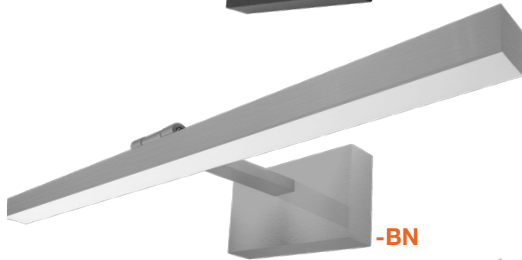

FRONT VIEW



90° Rotatable Angle

Vanity Fixture



#### Detail Specifications:

- Power: 21W
- Lumens: 2,700
- Finishes: Black, Brushed Nickel, Chrome
- IP Rating: IP54 Damp Location
- Beam Angle: 100°
- Chip: SMD 2835, R9 >50, CRI >90
- Operating Temperature: -40° - 114° F
- Lens: Frosted Acrylic, non-yellowing
- Average life (L70) of 50,000 hours

#### Applications:

- Bathrooms & Lavatories
- Hallways & Corridors
- Artwork, Museums
- Residential & Multifamily
- Education, Healthcare, Retail, Hospitality

#### Product Information:

- Available in 23.6" length
- Adjustable Angle: Lens swivels up and down
- Wide j-box for easier installation in retrofit and new construction applications
- Select-n-Switch Technology: 5-CCT Selectable

#### Driver Options:

- Triac & ELV dimmable down to 5%
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz
- Built in 2.5Kv Surge Protector
- Flicker Free

#### Mounting & Installations:

- 30/40 Junction Box
- Surface mount bracket included

#### Certifications:

- ETL Listed for USA and CA
- CA Title 24 JA8-2022 CEC Listed
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

#### Series

LED-VT-ADJ-24-21W-5CCT-BL

Black

LED-VT-ADJ-24-21W-5CCT-BN

Brushed Nickel

LED-VT-ADJ-24-21W-5CCT-CH


Chrome

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 04.25

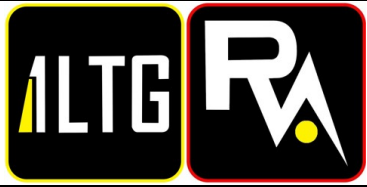

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-VT-ADJ-24-21W-5CCT-BN

Line Item#: 65  
[Go to Bill of Materials](#)

Type: V1

Powered by 4submit.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Vanity Fixtures

### Square Adjustable Swivel

#### FEATURES




90° Rotatable Angle



Beam Angle 100°


Frosted Acrylic  
Non-Yellowing  
Lens

Aluminum  
Body




5-CCT Selectable

#### MEASUREMENTS

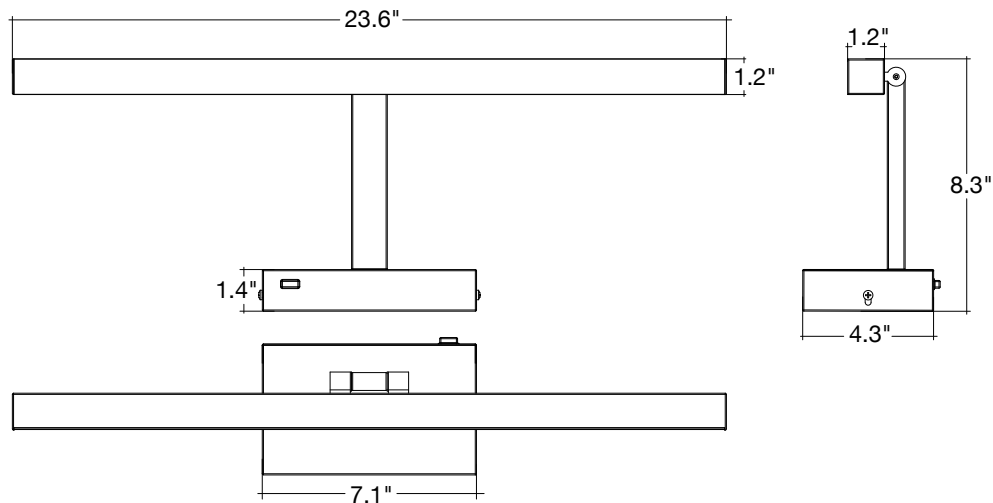

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

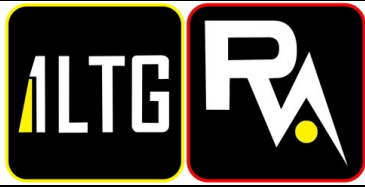

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
TS3-8FT-SM-WH

Line Item#: 66  
Go to Bill of Materials


Type: TL1

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## Linear Track & Accessories

### 3-Wire Single Circuit



	LENGTH	WIDTH	HEIGHT
TS3-2FT-SM 2' Nominal	24"	1 3/8"	1 1/16"
TS3-4FT-SM 4' Nominal	48"	1 3/8"	1 1/16"
TS3-8FT-SM 8' Nominal	96"	1 3/8"	1 1/16"



#### Item

**TS3-2FT-SM-WH**  
White  
**TS3-2FT-SM-BL**  
Black  
**TS3-4FT-SM-WH**  
White  
**TS3-4FT-SM-BL**  
Black  
**TS3-8FT-SM-WH**  
White  
**TS3-8FT-SM-BL**  
Black

#### Accessories

**TS3-SM-LIVE-WH**  
Live End: Required to start a run  
**TS3-SM-LIVE-BL**  
Live End: Required to start a run  
**TS3-SM-END-WH**  
End Cap: Required to end a run  
**TS3-SM-END-BL**  
End Cap: Required to end a run  
**TS3-SM-MJ-WH**  
Mini Joiner: Low profile joiner for two straight track sections  
**TS3-SM-MJ-BL**  
Mini Joiner: Low profile joiner for two straight track sections  
**TS3-SM-SC-WH**  
Straight Connector: Connect two track sections end to end with a center feed option  
**TS3-SM-SC-BL**  
Straight Connector: Connect two track sections end to end with a center feed option  
**TS3-SM-L-WH**  
L-Connector: Connect two track sections at a right angle  
**TS3-SM-L-BL**  
L-Connector: Connect two track sections at a right angle

**TS3-SM-T-WH**  
T-Connector: Connect two track sections at a T angle  
**TS3-SM-T-BL**  
T-Connector: Connect two track sections at a T angle  
**TS3-SM-X-WH**  
X-Connector: Connect two track sections at an cross angle  
**TS3-SM-X-BL**  
X-Connector: Connect two track sections at an cross angle  
**TS3-SM-FLX-WH**  
Flexible Connector: Connect two track sections at any angle up to 90°  
**TS3-SM-FLX-BL**  
Flexible Connector: Connect two track sections at any angle up to 90°  
**TS3-SM-FC-WH**  
Floating Canopy: Track can be connected to existing outlet box along the track.  
**TS3-SM-FC-BL**  
Floating Canopy: Track can be connected to existing outlet box

Project: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_

Track Lights



#### Detail Specifications:

- Finish: White, Black
- Dry Location Rated
- 3-Wire
- Single Circuit
- Voltage: 120V

#### Applications:

- General Track Lighting
- Residential & Multifamily
- Art Galleries, Museums
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality

#### Product Information:

- End cap included with each track
- Extruded aluminum housing
- Solid copper conductor
- Interchangeable beam angles
- Multiple accessories available

#### Mounting & Installations:

- Compatible with H-Type single circuit track system
- Surface Mount Use

#### Certifications:


- ETL Listed for USA and CA

Specs and model numbers are subject to change with or without notice. Customization of product is available.

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | www.envisionledlighting.com

Rev. 10.23

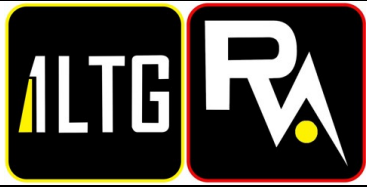

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
TS3-8FT-SM-WH

Line Item#: 66  
[Go to Bill of Materials](#)

Type: TL1

Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Linear Track & Accessories

### 3-Wire Single Circuit

#### TRACK ACCESSORIES



**TS3-SM-LIVE-WH**  
**TS3-SM-LIVE-BL**

Live End: Required to start a run



**TS3-SM-END-WH**  
**TS3-SM-END-BL**

End Cap: Required to end a run



**TS3-SM-MJ-WH**  
**TS3-SM-MJ-BL**

Mini Joiner: Low profile joiner for two straight track sections



**TS3-SM-SC-WH**  
**TS3-SM-SC-BL**

Straight Connector: Connect two track sections end to end with a center



**TS3-SM-L-WH**  
**TS3-SM-L-BL**

L-Connector: Connect two track sections at a right angle




**TS3-SM-T-WH**  
**TS3-SM-T-BL**

T-Connector: Connect two track sections at a T angle



**TS3-SM-X-WH**  
**TS3-SM-X-BL**

X-Connector: Connect two track sections at an cross angle




**TS3-SM-FLX-WH**  
**TS3-SM-FLX-BL**

Flexible Connector: Connect two track sections at any angle up to 90°



**TS3-SM-FC-WH**  
**TS3-SM-FC-BL**

Floating Canopy: Track can be connected to existing outlet box along the track.

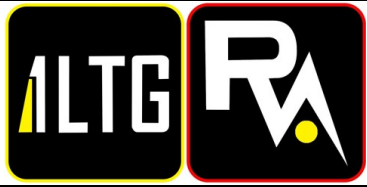

Date: 1/12/2026

Project:  
FINDLAY FLATSDescription:  
LED-ATH-10W-5CCT-30D-WHLine Item#: 67  
[Go to Bill of Materials](#)Type: TRACK  
HEAD

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## ARCY-Line: Track Heads

### COB 5-CCT Selectable



#### Track Lights



#### Detail Specifications:

- Finish: White, Black
- Damp Location Rated
- Chip: High Lumen COB, R9 >50, CRI >90
- 2 Step MacAdam Ellipses
- Operating Temperature: -40° - 114° F
- Lens: PMMA Clear Lens
- Average life (L70) of 50,000 hours

#### Applications:

- General Track Lighting
- Residential & Multifamily
- Art Galleries, Museums
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality

#### Product Information:

- Metal housing and trim for better heat dissipation
- 350° Horizontal Rotation, 90° Vertical Rotation
- Interchangeable beam angles
- For use with H-Type track or surface mount installation
- Select-n-Switch Technology: 5-CCT
- Instant-On to full brightness

#### Driver Options:

- Voltage: 120V
- Triac Dimmable Down to 5%
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz
- Built in 2.5Kv Surge Protector
- Flicker Free

#### Mounting & Installation:

- Compatible with H-Type single circuit track system
- Surface mount accessory option available for 3/40 J-Box

#### Certifications:

- ETL Listed for USA and CA
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017
- IC Rated and ASTM-E283 Air-Tight
- Complies with UL 263, ASTM E119, CAN ULC S101


Series	Beam Angles	Finish	Mounting
LED-ATH-10W-5CCT 10W • 1,000lm	30D <sup>1</sup> 30°	WH White	(Blank) H-Type Track
LED-ATH-20W-5CCT 20W • 2,000lm	36D <sup>1</sup> 36°	BLK Black	SM Surface Mount
LED-ATH-30W-5CCT 30W • 3,000lm	24D 24° 60D 60°		
1. • 30D standard on 10W. • 36D standard on 20W & 30W. • 24D & 60D available for all sizes			

#### Optional Accessories (Order Separately)

Optic Lens	Surface Mount	Emergency Backup <sup>1</sup> (field install)
ATH-10W-24D 24° Beam Angle ATH-10W-60D 60° Beam Angle ATH-20W-24D 24° Beam Angle ATH-20W-60D 60° Beam Angle ATH-30W-24D 24° Beam Angle ATH-30W-60D 60° Beam Angle	ATH-SM Surface Mount for 30/40 Jbox	LED-EMB-15W-HV-0/10V-2P Up to 14W fixtures LED-EMB-25W-HV-0/10V-2P Up to 24W fixtures
		1. Field installable. Lasts 90 minutes.

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

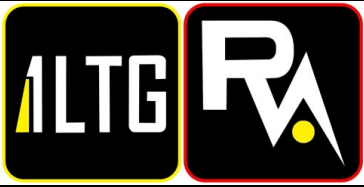

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-ATH-10W-5CCT-30D-WH

Line Item#: 67  
[Go to Bill of Materials](#)

Type: TRACK  
HEAD





Powered by 4submit.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## ARCY-Line: Track Heads

### COB 5-CCT Selectable

#### FEATURES

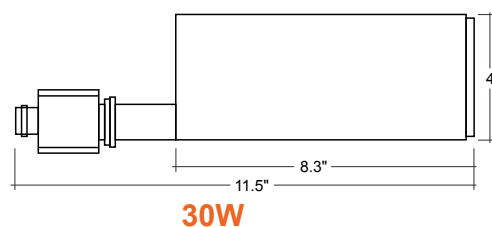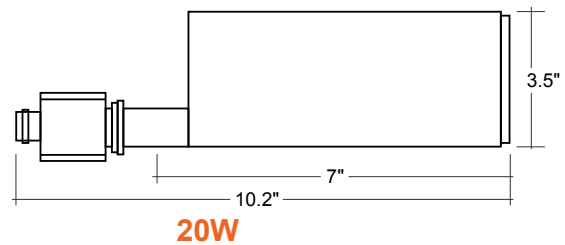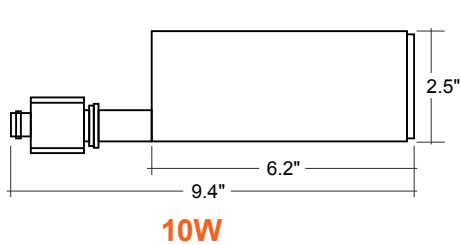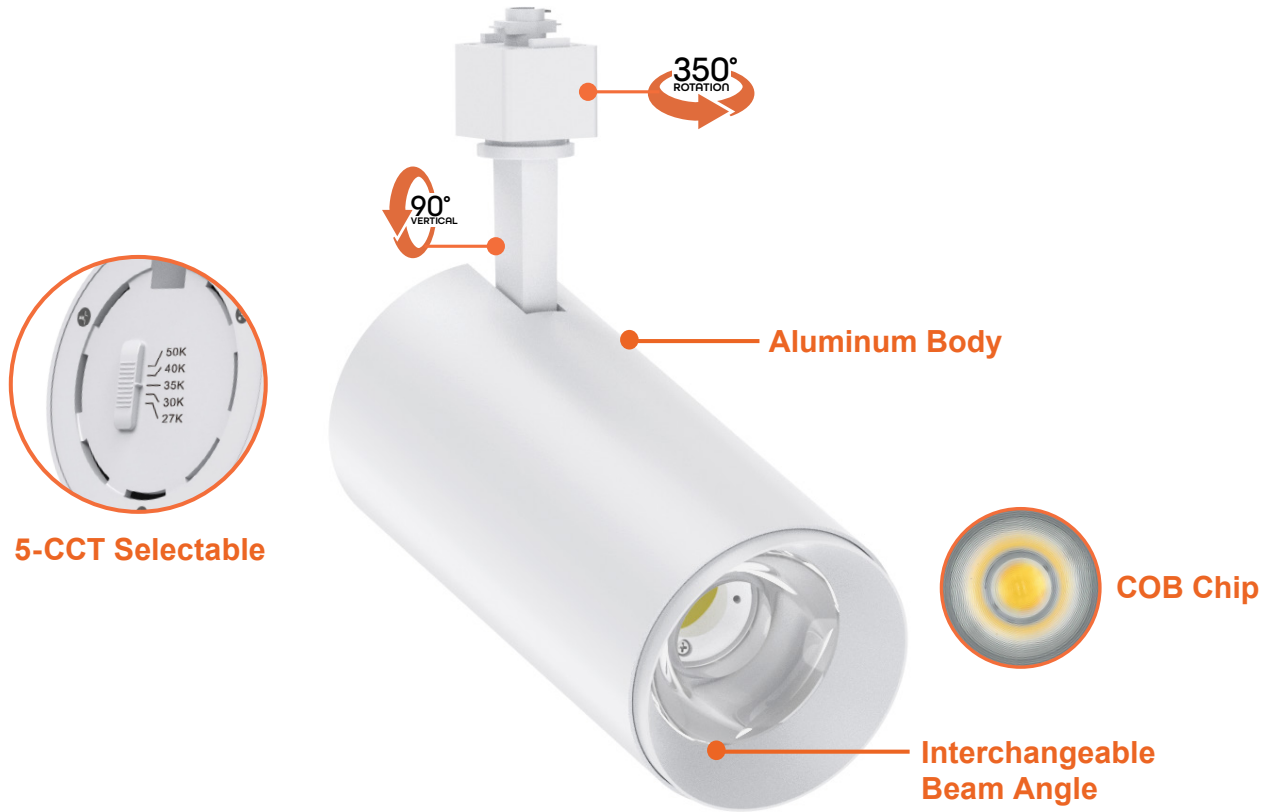

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-ATH-10W-5CCT-30D-WH

Line Item#: 67  
[Go to Bill of Materials](#)

Type: TRACK  
HEAD

Powered by 4submit.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## ARCY-Line: Track Heads

### COB 5-CCT Selectable

#### ACCESSORIES



LENS

ATH-SM

#### QUICK SHIP MODELS

Model	Voltage	Watts	Lumens	Color	CRI
LED-ATH-10W-5CCT-30D-WH	120V	10w	1000	27/30/35/40/50K	>90
LED-ATH-10W-5CCT-30D-BLK	120V	10w	1000	27/30/35/40/50K	>90
LED-ATH-20W-5CCT-36D-WH	120V	20w	2000	27/30/35/40/50K	>90
LED-ATH-20W-5CCT-36D-BLK	120V	20w	2000	27/30/35/40/50K	>90
LED-ATH-30W-5CCT-36D-WH	120V	30w	3000	27/30/35/40/50K	>90
LED-ATH-30W-5CCT-36D-BLK	120V	30w	3000	27/30/35/40/50K	>90

#### OPTIC LENS

Model	Description
ATH-10W-24D	Track Heads: ACRY-Line 24D Optic
ATH-10W-60D	Track Heads: ACRY-Line 60D Optic
ATH-20W-24D	Track Heads: ACRY-Line 24D Optic
ATH-20W-60D	Track Heads: ACRY-Line 60D Optic
ATH-30W-24D	Track Heads: ACRY-Line 24D Optic
ATH-30W-60D	Track Heads: ACRY-Line 60D Optic

#### SURFACE MOUNT

Accessory	Description
ATH-SM	Surface Mount for 30/40 Jbox

#### BATTERY BACK-UP

Accessory	Description
LED-EMB-15W-HV-0/10V-2P	Up to 14W fixtures
LED-EMB-25W-HV-0/10V-2P	Up to 24W fixtures

#### TESTED COMPATIBLE DIMMERS


Other dimmers may be compatible but have not been tested.  
Please contact us for more information.

Lutron	Leviton	Toshiba	Panasonic
DVCL-153P	6674	WDG9001	WN575149
SCL-153P			
LGCL-153P			
MACL-153M			
MSCL-OP153M			
S-600P			
AYCL-153			
DV-600P			

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)



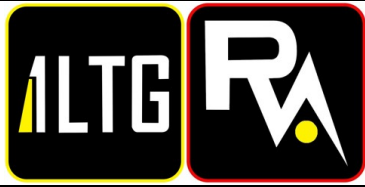

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
SM56885FTSN

Line Item#: 69  
[Go to Bill of Materials](#)

Type: SM13

Powered by 4submittal.com


Essentials - 588x | SM56885FTSN

Job Name: Job Type: Quantity: Comments:



#### PRODUCT DESCRIPTION

Maxim Lighting's commitment to both the residential lighting and the home building industries will assure you a product line focused on your lighting needs. With Maxim Lighting you will find quality product that is well designed, well priced and readily available.



#### MEASUREMENTS

DIMENSION : 9" L x 9" W x 5" H  
HANGING WEIGHT : 2.18 lb

#### LAMPING

INPUT VOLTAGE : 120V  
BULB : 60W Incandescent E26 Medium , 120W Total  
BULB INCLUDED : (Not Included)  
DIMMABLE : Yes

#### FINISHES OPTION

Oil Rubbed Bronze (OI)  
 Satin Nickel (SN)

#### GLASS

Frosted FT

#### MATERIAL

Glass, Steel

#### RATINGS

cETLus  
Damp Location



#### ADDITIONAL

OPERATING TEMPERATURE:  
-20°C (-4°F), 40°C (104°F)

Always consult a qualified electrician before installing any lighting product.

# STUDIO•M

Modifications or Customizations: Please email [contract@studiomlighting.com](mailto:contract@studiomlighting.com)

Sample Request: Please email [order@studiomlighting.com](mailto:order@studiomlighting.com) with subject line

"Sample Order, [Project Name] / [Specifier/Designer]"

All samples are subject to Studio M approval and must show proof of project and/or explanation.

Job Name:	Job Type:
Quantity:	Comments:

StudioMlighting.com - 1.626.956.4209



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-A19-9W-5CCT

Line Item#: 70  
[Go to Bill of Materials](#)

Type: SM13 LAMP

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

Project: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_

LED Bulbs



## A Bulb SERIES: 5-CCT LED BULBS



A-19, A-21



A-19



A-21



### Detail Specifications

- IP Rating: Damp Location
- Beam Angle: 220°
- 5-CCT: 27/30/35/40/50K
- Chip: SMD 2835, R9 >50, CRI >90
- Operating Temperature: -4° - 114° F
- Average life (L70) of 25,000 hours

### Applications:

- Decorative Lighting
- Interior Lighting
- Table & Floor Lamps
- Showcases
- Residential, Multi-Family, Commercial

### Product Information:

- Suitable for use in existing fixtures
- Instant-On to full brightness

### Driver Options:

- 120V
- Triac Dimmable
- PF >0.9, 50/60Hz

### Mounting & Installation:

- E26 Socket
- Direct A Lamp Replacement

### Packaging:

- All bulbs come in individual color boxes, but are sold in inner carton qty packs only

Carton Qty.	A-19	A-21
Inner Carton	10	10
Master Carton	100	100

### Certifications:

- ETL Listed for USA and CA
- Energy Star
- Title 20 and JA8-2022 Approved
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

### Dimmer List:

Leviton	6674
Lutron	LGCL-153P
Lutron	DVCL-153P
Lutron	CTCL-153P
Lutron	MAELV-300

Series

**LED-A19-9W-5CCT**

600 Lumens 60W Equivalent

**LED-A21-15W-5CCT**


1,600 Lumens 100W Equivalent

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 10.23

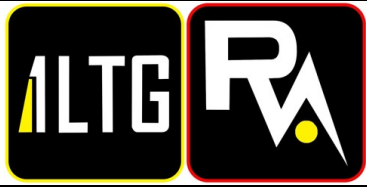

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 71  
[Go to Bill of Materials](#)

Type: SM2

Powered by 4submittal.com




LIGHTING | REINVENTED

plano **ARCH** PRO

## LDLL | Eclipse-II

Product Data Sheet

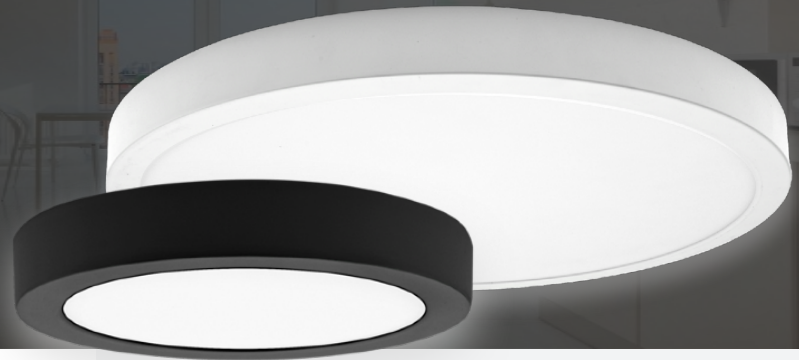

COMMERCIAL-GRADE

### LED Surface Mount Puck Downlight



CCTselect



TruColor Rendering

5" / 7" / 9" / 11" / 13"

#### Product Overview

**INTENDED USE** — The Eclipse-II Series is built for 5-way switchable CCT and is suitable for use in dry, damp, and wet locations, perfect for use in kitchens, hallways, stairways, bathrooms, closets, and just about anywhere you'd need it.

**CONSTRUCTION** — The die-cast aluminum housing is designed for durability and ruggedness.

**INSTALLATION** — Quick-mount aluminum backplate for easy installation.

**WARRANTY** — Featuring a no-compromise 5-year warranty, Energy Star and JA8-compliant, the Eclipse-II is a clean and modern solution for surface mounted driverless design.

ARCHIPELAGO luminaires and LED components undergo rigorous testing by an independent laboratory to meet IESNA LM-79 and LM-80 standards for light output and lumen maintenance. LED color temperature is warranted to shift no more than 180K over the standard warranty period. Correlated Color Temperature (CCT) follows the guidelines set forth in the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

#### Applications



Residential



Hallway



Patio



Entryway

#### Main Features

- Low-Profile Edge-Lit Surface Mount Design
- Durable Di-Cast Aluminum Trim w/ Frosted Lens
- For New Construction or Retrofit Applications
- Suitable for Use in Dry, Damp and Wet Locations
- Suitable for Use in Closets, In Accordance to NEC Guidelines
- Installs on Ceiling and Standard Junction Boxes
- Dimmable to 10% on Compatible TRIAC Dimmers
- 5-Year, 50,000 Hr Warranty
- CEC T24 JA8 Compliant
- NEC Compliant, Suitable for Use in Closet
- Energy Star Certified for 5", 7", 9"

#### Product Warranty\*

5-Year Warranty



50,000 Hrs



\* Standard warranty. Extended warranty available.

Archipelago Lighting, Inc.

| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

[Contact Us](#)





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W


Line Item#: 71  
[Go to Bill of Materials](#)

Type: SM2

Powered by 4submittal.com



LDLL | Eclipse-II

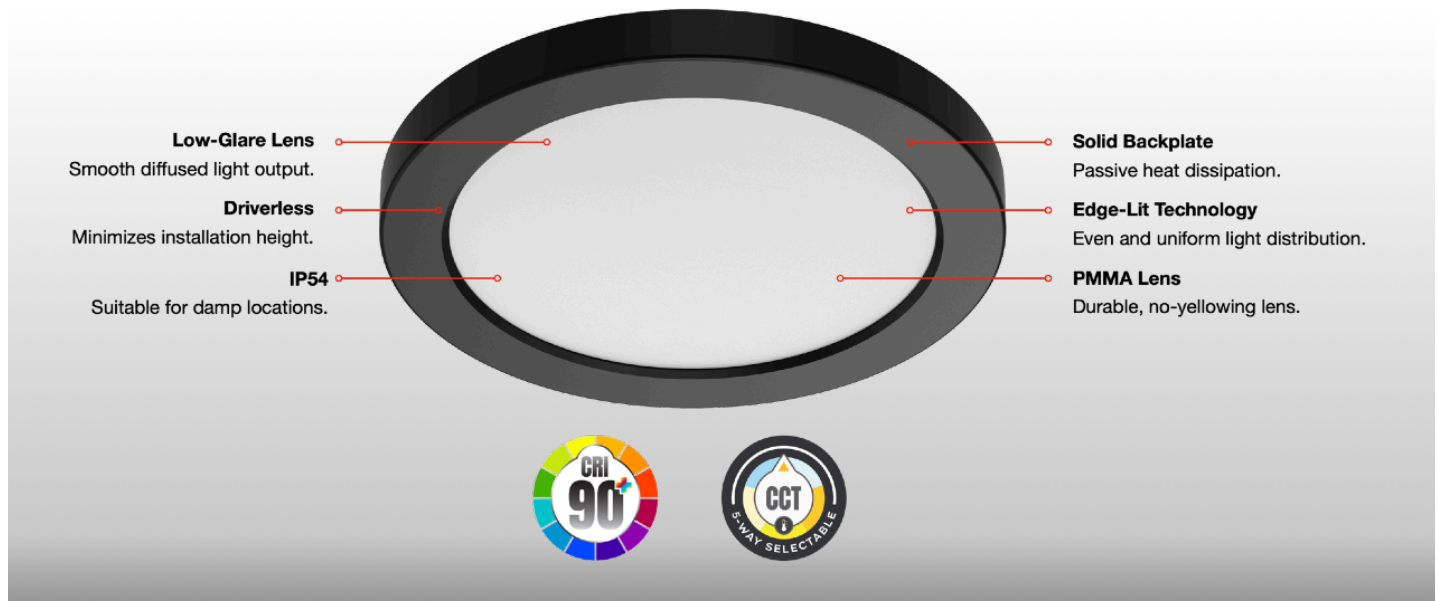

#### Ordering Guide<sup>1</sup>

Model Series	Size (in) / Wattage (W)	Series	CCTselect (K)	Finish Color
<b>LDLL</b> LED Surface Mount Puck Downlight	<b>0510</b> 5inch / 10W <b>0715</b> 7inch / 15W <b>0918</b> 9inch / 18W <b>1121</b> 11inch / 21W <b>1324</b> 13inch / 24W	- <b>E2</b> Eclipse-II	<b>S5</b> 5-CCTselect: 2700K 3000K 3500K 4000K 5000K	/ <b>B</b> Black <b>W</b> White
<b>CATALOG #:</b>				
<b>LDLL</b>		- <b>E2</b>	<b>S5</b>	/

#### Options Guide<sup>2</sup>

EM Driver <sup>3</sup>	Motion Sensor
<input type="checkbox"/> <b>EM15</b> 15W EM Driver <input type="checkbox"/> <b>CRCU</b> 15W EM Driver with Junction Box	<input type="checkbox"/> <b>MSP/W</b> PIR Bi-Level Sensor for 7" and 9" ONLY (White Finish)
<b>OPTIONAL ACCESSORIES #:</b>	

NOTE:

- Only one selection may be applicable within the same category.
- Multiple selections may be applicable within the same option category. See Compatible Accessories below for details.
- EM drivers only work with 7, 9, 11 and 13in fixtures

#### Archipelago Lighting, Inc.


| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

#### Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)






+1 (866) 912-3220

	Date: 1/12/2026	Description: LDLL0510-E2S5/W	Line Item#: 71
	Project: FINDLAY FLATS		<a href="#">Go to Bill of Materials</a>
			Type: SM2
Powered by 4submittal.com			



LDLL | Eclipse-II

Sizing & Measurements


Model Series	Dimensions	Overall Diameter (in)	Depth (IN)
LDLL0510-E2		5.51	0.79
LDLL0715-E2		7.48	0.82
LDLL0918-E2		8.86	0.79
LDLL1121-E2		10.98	0.98
LDLL1124-E2		12.80	0.98

Recommended Dimmers

Make	Models			
Lutron	TG-600PR-WH S-600PR-WH CTCL-153PDH-WH	TGCL-153PH-LA SLV-600P-AL DV-600PR-WH	SCL-153PH-WH GT-600P DVCL-153P	MSCL-OP153M MACL-153M//MA-R PD-6WCL
Leviton	6672 IPL06	6674	DSL06	RNL06

Accessories (Standard)

Accessories (Optional)



<b>Mounting Bracket</b>	<b>Wire Nuts</b>	<b>Bolts</b>	<b>15W EM Driver</b>	<b>PIR Bi-Level Sensor</b>
Compatible to 2.75" or 3.50" Junction Box			EM15-HMB/170DC CRCU-EM/JBM	LDLL-E2/MSP/W

Archipelago Lighting, Inc.

| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 71  
[Go to Bill of Materials](#)


Type: SM2


Powered by 4submittal.com



LDLL | Eclipse-II

EM Driver / J-Box (Optional)

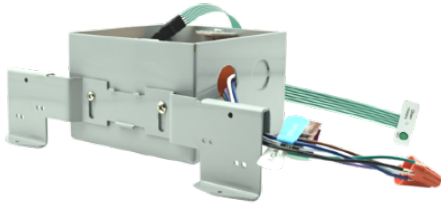

Technical Specification	CRCU-EM/JBM
Emergency Power	15W Max
Installation Method	Recessed
IP Rating	IP20
CEC T.24/JA8 Compliant	Yes
Color Finish	Grey
Physical Features	<ul style="list-style-type: none"><li>Directly connect to AC input</li><li>Fits 2.75" and 3.5" J-Box</li><li>Supports recessed in-ceiling mount</li></ul>
Self-Diagnostic Test Switch	<ol style="list-style-type: none"><li>Emergency conversion kit will go into emergency mode when test switch is pressed while main power is ON.</li><li>Will go into charging mode if test switch is not pressed.</li><li>In emergency mode, pressing the test switch for 3-seconds will inactivate emergency mode.</li></ol>
Indicator Status Light	<ol style="list-style-type: none"><li>Green ON: Charging mode / charging full</li><li>Green OFF: Mains power OFF / discharging mode</li></ol>
Dimension	<p>W4.29in x H2.96</p> 

Archipelago Lighting, Inc.

| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220





Date: 1/12/2026

Project:  
FINDLAY FLATS


Description:  
CFR525J1-N10-WP-1-FM

Line Item#: 73  
[Go to Bill of Materials](#)

Type: F2

Powered by 4submittal.com

**CARRO**  
SMART FANS | LIGHTING

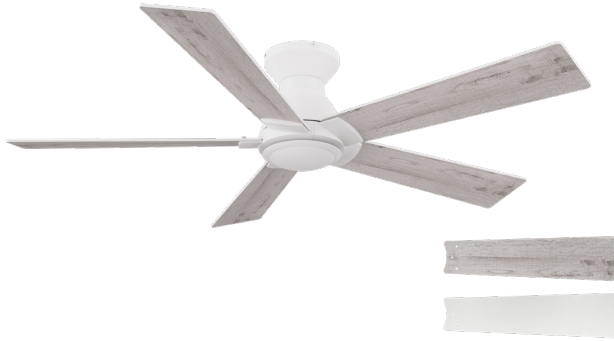

### DC Motor

- 10-Speed | Reversible
- Motor | 148 X 15mm
- RPM: High 205 Low 65
- 4630 CFM | 26 W | Efficiency = 174 CFM / Watt

### Blade

- 5-Blade | 52" Sweep
- Material: Highly-Compressed Plywood
- 11° Pitch

### Light Kit

- No Light
- Metal Plate

### Control

- Remote (Standard)
- Wall Control (Optional\*)
- Pull Chain (Optional\*)

### Location

- Indoor / Outdoor (Damp Rated)

### Certification

- ETL Listed

### Warranty

- Fan Motor: Three-Year Limited Warranty
- Fan Blade: Three-Year Limited Warranty
- Other: Three-Year Limited Warranty

### Measurements

- Dimensions (in.):  
10.8 H (to lowest point) x 7 W (housing) x 7.2 H (top of blade)
- Product Weight (lbs.): 11.2 N.W. | 15 G.W.
- Box (in.): 23 L X 11 W X 10 H

### Shipping

- Container Loading:  
20GP 680 pcs | 40GP 1400 pcs | 40HQ 1640 pcs

SKU #

CFR525J1-N10-WP-1-FM

Motor/Blade Finish

White | White & Whitewashed  
Reversible Plywood Blades

# LURGAN

5-Blade | 52 " | Flushmount | Remote Control  
DC MOTOR 120V  
NO LIGHT



Intertek


Fan Motor

Fan Blade

Other

### Dimensions

10.8"	7"	7.2"
Height (lowest point)	Width (housing)	Height (top of blade)

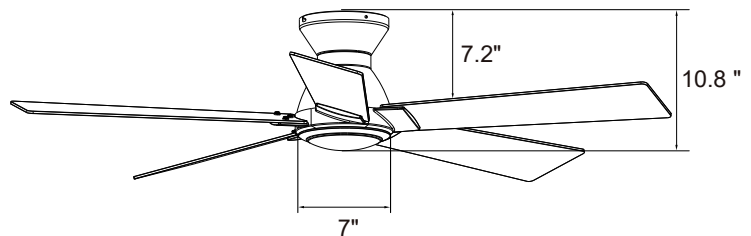


### Fan Control Features and Options

- Simple and intuitive design with standard layout.
  - Multi-functional fan speed control with fan forward/reverse, and fan on/off.
  - Remote (Standard)
  - Hardwired Wall Control (Optional\*)
    - Single Live Wire No Neutral Needed
    - Push Button or Knob design available
  - Pull Chain (Optional\*)
- \* Optional controls at an additional cost

Remote



Push Button




Knob



Pull Chain



\* Data subject to change without notice.

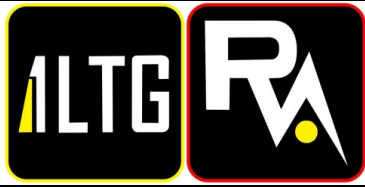

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-DH-HO

Line Item#: 74  
[Go to Bill of Materials](#)

Type: EM

Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Emergency Bug Eyes Square Models



Emergency



### Detail Specifications:

- Finish: White
- IP Rating: Dry Location
- Lumen Options
  - Standard: 3W 140LM
  - High Output: 6W 650LM
- Operating Temperature: -40° - 104° F
- Average life (L70) of 50,000 hours

### Applications:

- Exit Doors
- Corridor Intersections
- Exit Stairways
- Exit ramps

### Product Information:

- Built-in test switch and charge indicator light
- Overcharge and over-discharge protection
- Injection-molded thermoplastic housing, PC cover
- Backup Time: >90 minutes
- Recharge time: 24 hours

### Driver Options:

- Dual Voltage 120/277V
- PF >0.9, 50/60Hz
- Nickel Cadmium Battery 3.6V
- This fixture is non-dimmable

### Mounting & Installation:

- Wall and ceiling mounted
- Universal J-box mounting pattern

### Certifications:

- UL Listed for USA and CA (UL94V-0 Flame Rating)
- Meets UL924, NDPA 101
- Approved for CA T24
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

Series

**LED-EM-DH**

3W • 140Lm

**LED-EM-DH-HO**


6W • 650Lm

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 01.24

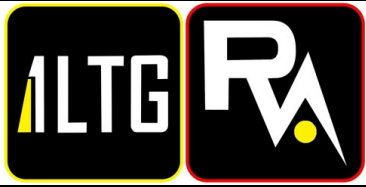

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-DH-HO

Line Item#: 74  
[Go to Bill of Materials](#)


Type: EM

Powered by 4submittal.com


**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Emergency Bug Eyes Square Models

### FEATURES

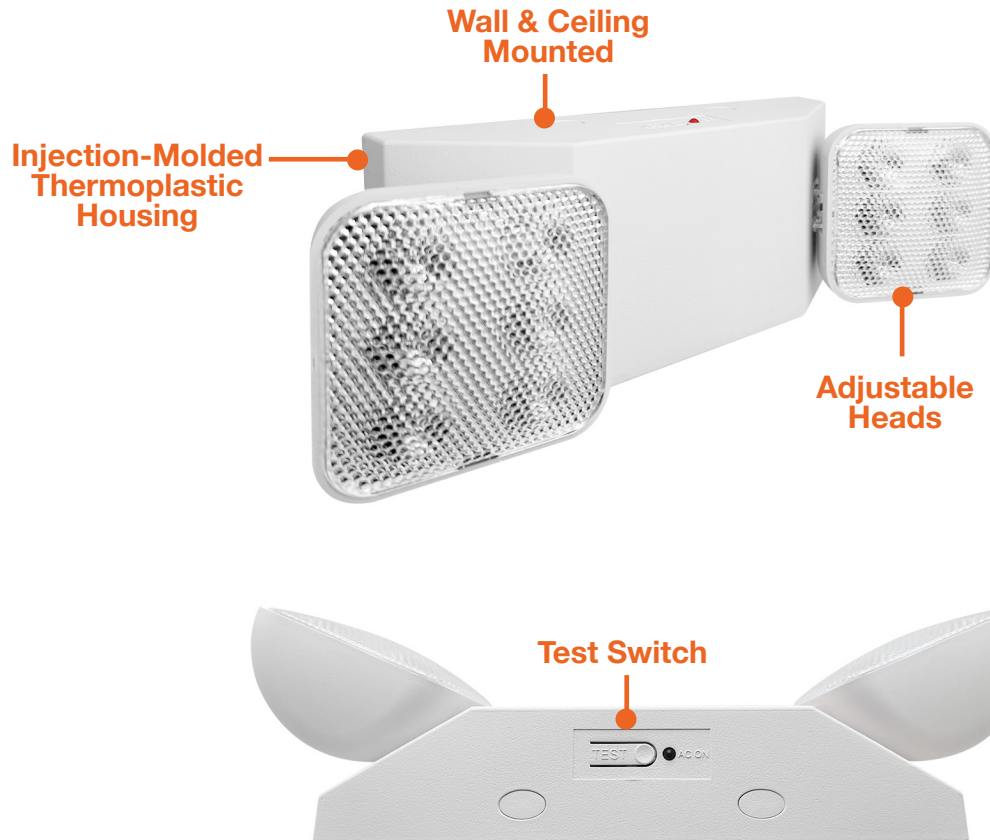


### DIMENSIONS

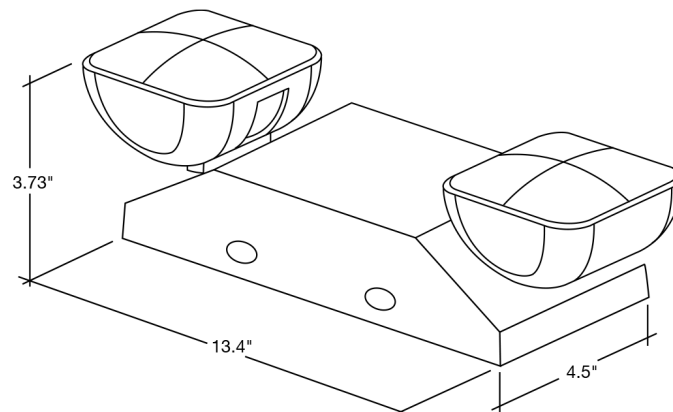

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

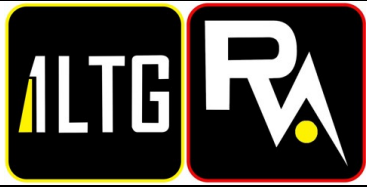

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-EXT-RG-WH-CMB-RC

Line Item#: 75  
[Go to Bill of Materials](#)

Type: EX/EM

Powered by 4submittal.com

**EnVisionLED**<sup>TM</sup>  
[WWW.ENVISIONLEDLIGHTING.COM](http://WWW.ENVISIONLEDLIGHTING.COM)

## Emergency Exit Sign With Bug Eyes



### Emergency Exit Signs



#### Detail Specifications:

- Finish: White Finish
- IP Rating: IP20, Dry Location
- Wattage: 3.5W
- Lumens: 140
- Operating Temperature: 32°F to 104°F
- Lens: Red or Green
- Remoted Capable
- Compatible with: LED-EM-RC-1, LED-EM-RC-2
- Average life (L70) of 50,000 hours

#### Applications:

- Exit Doors
- Corridor Intersections
- Exit Stairways
- Exit Ramps

#### Product Information:

- Built-in test switch and charge indicator
- Injection-molded thermoplastic housing, PC cover
- Backup Time: >90 minutes
- Recharge time: 24 hours
- Single Face
- 6" height letters with 3/4" stroke, viewable from 100ft away

#### Driver Options:

- Dual Voltage 120/277V
- PF >0.9, 50/60Hz

#### Mounting & Installations:

- Wall and ceiling mounted
- Universal J-box mounting pattern

#### Certifications:

- UL Listed for USA and CA (UL94V-0 Flame Rating)
- Meets UL924, NDPA 101
- Approved for CA T24
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

#### REMOTE HEAD OPTIONS

LED-EM-RC-1

LED-EM-RC-2

Series

**LED-EM-EXT-RG-WH-CMB-RC**


Red/Green Color Selectable

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 08.25

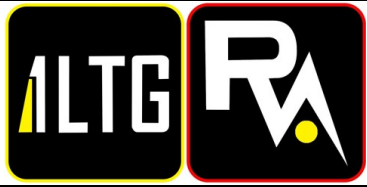

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-EXT-RG-WH-CMB-RC

Line Item#: 75  
[Go to Bill of Materials](#)


Type: EX/EM

Powered by 4submit.com


**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## Emergency Exit Sign With Bug Eyes

### FEATURES

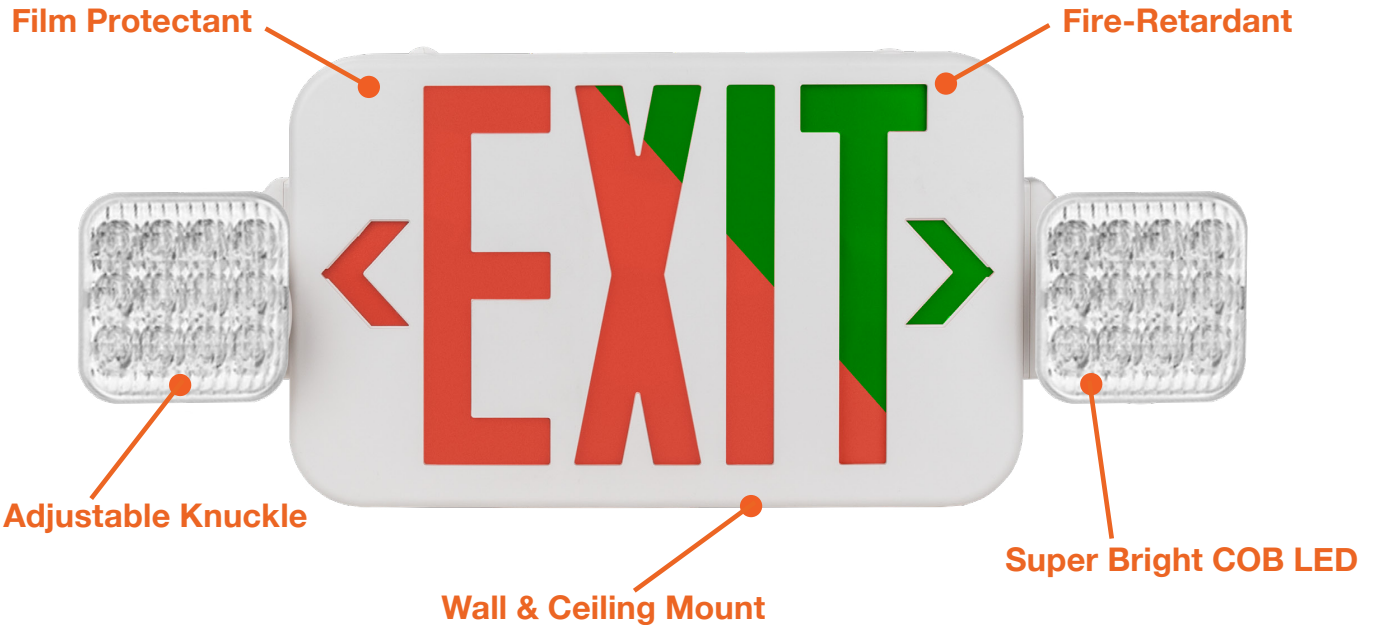


### DIMENSIONS

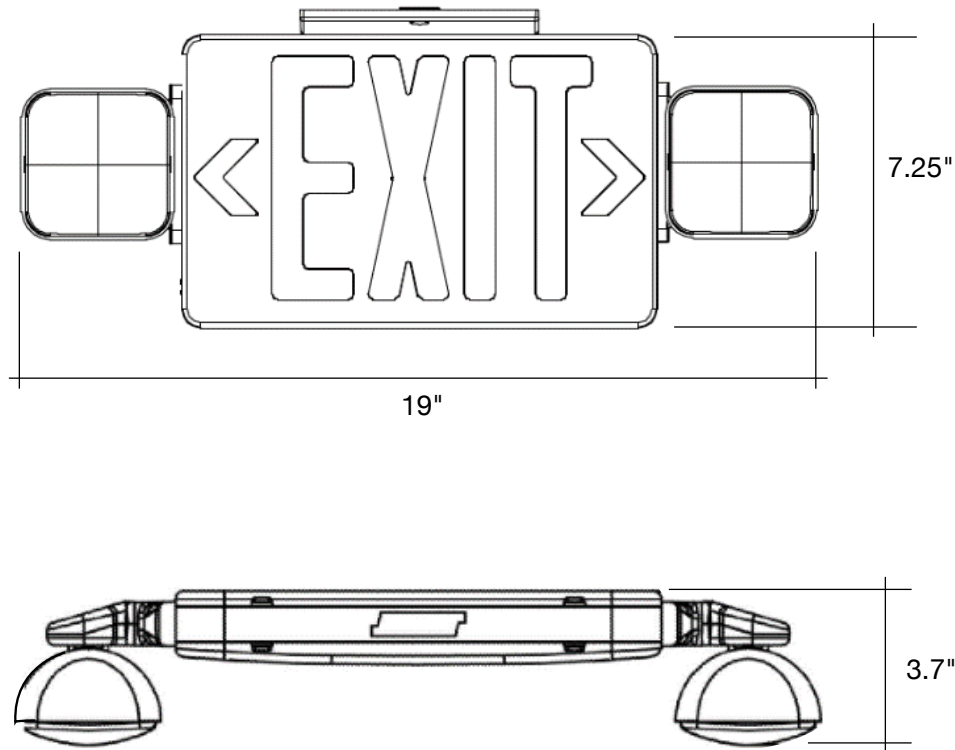

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

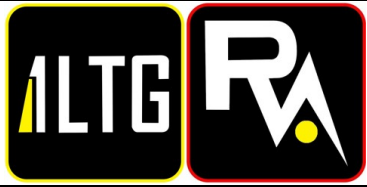

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-EXT-RG-WH-CMB-RC

Line Item#: 76  
[Go to Bill of Materials](#)

Type: EX/EM

Powered by 4submittal.com

**EnVisionLED**<sup>TM</sup>  
[WWW.ENVISIONLEDLIGHTING.COM](http://WWW.ENVISIONLEDLIGHTING.COM)

## Emergency Exit Sign With Bug Eyes



### Emergency Exit Signs



#### Detail Specifications:

- Finish: White Finish
- IP Rating: IP20, Dry Location
- Wattage: 3.5W
- Lumens: 140
- Operating Temperature: 32°F to 104°F
- Lens: Red or Green
- Remoted Capable
- Compatible with: LED-EM-RC-1, LED-EM-RC-2
- Average life (L70) of 50,000 hours

#### Applications:

- Exit Doors
- Corridor Intersections
- Exit Stairways
- Exit Ramps

#### Product Information:

- Built-in test switch and charge indicator
- Injection-molded thermoplastic housing, PC cover
- Backup Time: >90 minutes
- Recharge time: 24 hours
- Single Face
- 6" height letters with 3/4" stroke, viewable from 100ft away

#### Driver Options:

- Dual Voltage 120/277V
- PF >0.9, 50/60Hz

#### Mounting & Installations:

- Wall and ceiling mounted
- Universal J-box mounting pattern

#### Certifications:

- UL Listed for USA and CA (UL94V-0 Flame Rating)
- Meets UL924, NDPA 101
- Approved for CA T24
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

#### REMOTE HEAD OPTIONS

LED-EM-RC-1

LED-EM-RC-2

Series

**LED-EM-EXT-RG-WH-CMB-RC**

Red/Green Color Selectable


*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 08.25



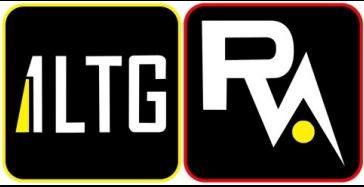

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-EXT-RG-WH-CMB-RC

Line Item#: 76  
[Go to Bill of Materials](#)


Type: EX/EM

Powered by 4submit.com


**EnVisionLED**<sup>TM</sup>  
WWW.ENVISIONLEDLIGHTING.COM

## Emergency Exit Sign With Bug Eyes

### FEATURES

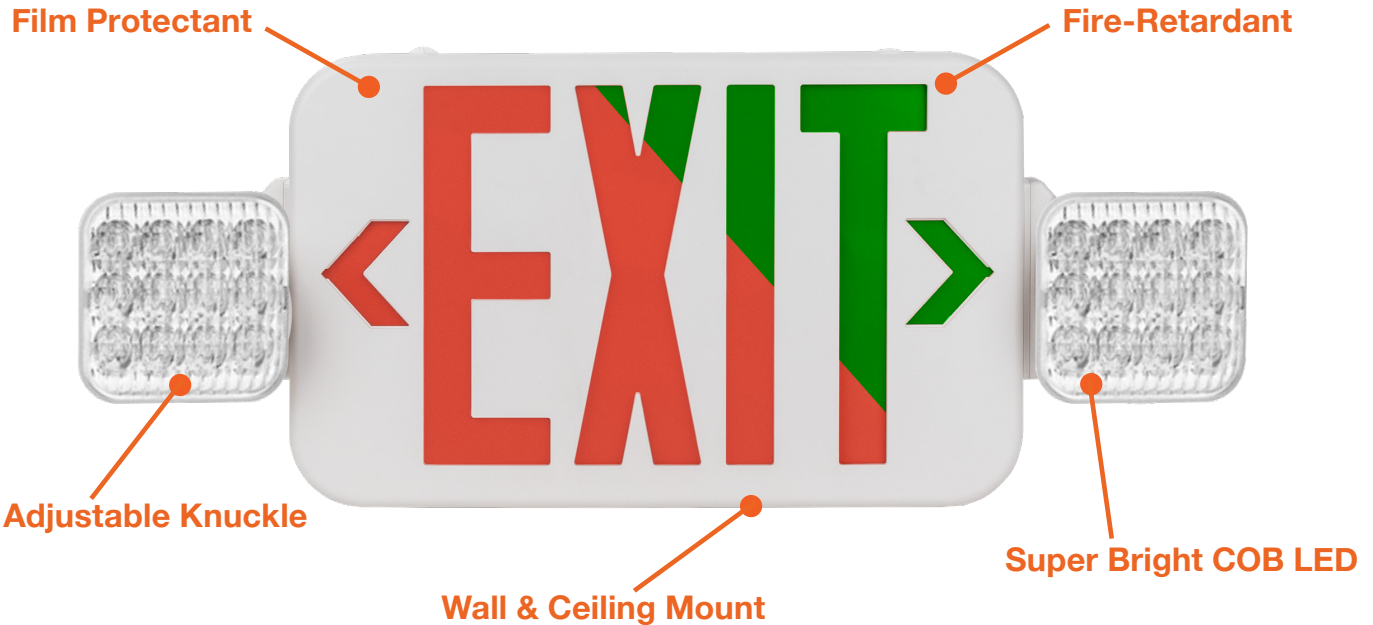

### DIMENSIONS

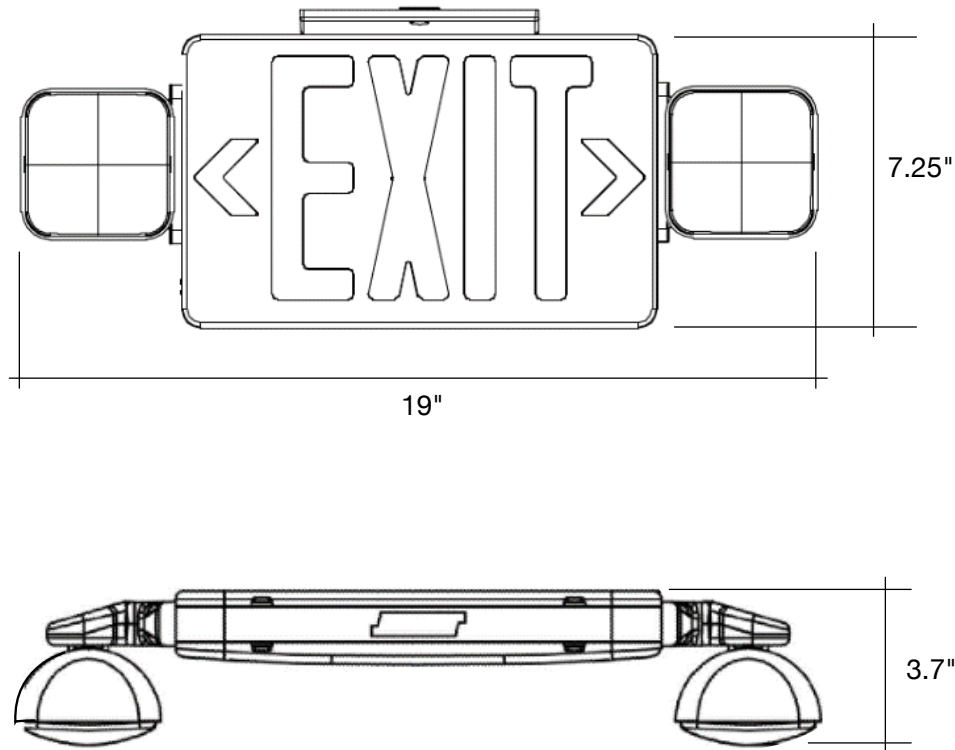

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-RC-1

Line Item#: 77  
[Go to Bill of Materials](#)

Type: RH1

Powered by 4submittal.com



Project: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_



## Single/Double Remote Head

### Product Information:

- Injection-Molded Thermoplastic ABS Housing
- 320 Lumens
- UL-940V-0 Flame Rating
- Wall and Ceiling Mounting
- Input Voltage: 3.6-24 VDC
- Super Bright SMD LED 2.4W
- IP Class: IP65
- Insulation: Class II
- Operating Temperature: 0°F ~ 104° F
- Remote Capable
- Compatible with but Not Limited to  
LED-EM-EXT-G-WH-CMB-RC  
or LED-EM-EXT-R-WH-CMB-R
- 5 Year Limited Warranty



Product Head  
LED-EM-RC-1


**1 Product**  
LED-EM-RC Remote Head


**2 Head**  
Single 1  
Double 2

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)



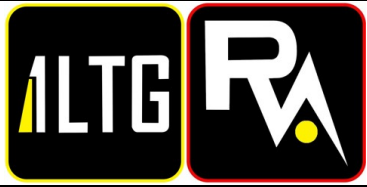

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-RC-1

Line Item#: 77  
[Go to Bill of Materials](#)

Type: RH1

Powered by 4submittal.com


**EnVisionLED™**

## Single/Double Remote Head

### FEATURES



### FEATURES

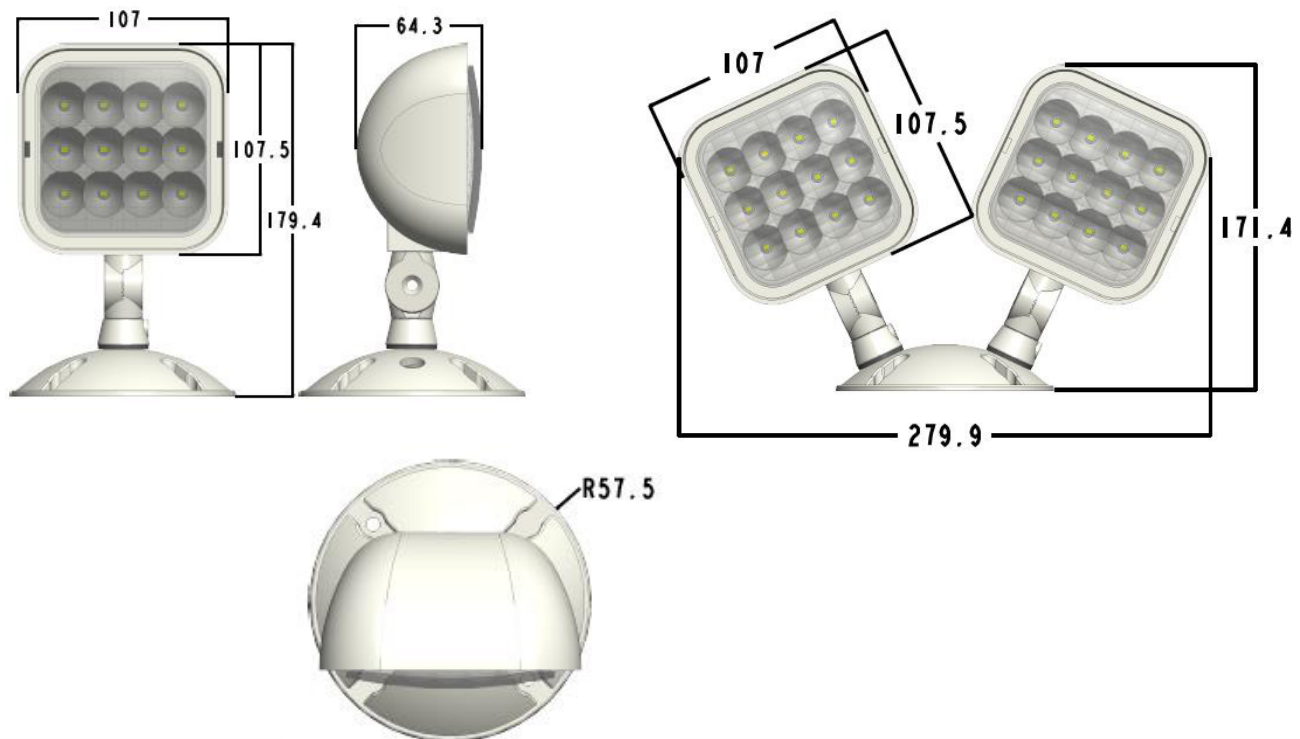


*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)



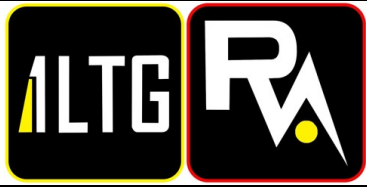

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 78  
[Go to Bill of Materials](#)

Type: SM1

Powered by 4submittal.com




LIGHTING | REINVENTED

plano **ARCH** PRO

## LDLL | Eclipse-II

Product Data Sheet

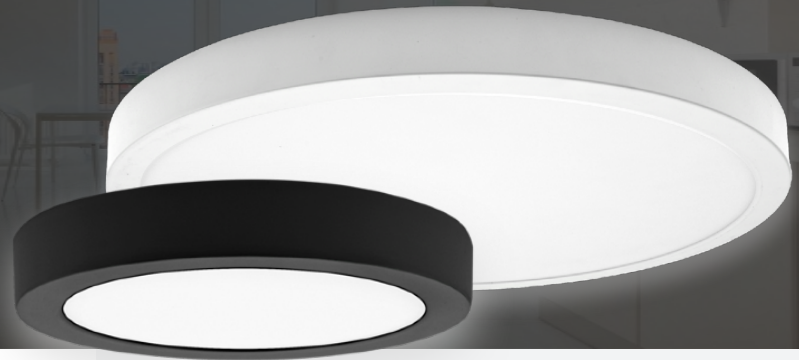

COMMERCIAL-GRADE

### LED Surface Mount Puck Downlight



CCTselect



TruColor Rendering

5" / 7" / 9" / 11" / 13"

#### Product Overview

**INTENDED USE** — The Eclipse-II Series is built for 5-way switchable CCT and is suitable for use in dry, damp, and wet locations, perfect for use in kitchens, hallways, stairways, bathrooms, closets, and just about anywhere you'd need it.

**CONSTRUCTION** — The die-cast aluminum housing is designed for durability and ruggedness.

**INSTALLATION** — Quick-mount aluminum backplate for easy installation.

**WARRANTY** — Featuring a no-compromise 5-year warranty, Energy Star and JA8-compliant, the Eclipse-II is a clean and modern solution for surface mounted driverless design.

ARCHIPELAGO luminaires and LED components undergo rigorous testing by an independent laboratory to meet IESNA LM-79 and LM-80 standards for light output and lumen maintenance. LED color temperature is warranted to shift no more than 180K over the standard warranty period. Correlated Color Temperature (CCT) follows the guidelines set forth in the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

#### Applications



Residential



Hallway



Patio



Entryway

#### Main Features

- Low-Profile Edge-Lit Surface Mount Design
- Durable Di-Cast Aluminum Trim w/ Frosted Lens
- For New Construction or Retrofit Applications
- Suitable for Use in Dry, Damp and Wet Locations
- Suitable for Use in Closets, In Accordance to NEC Guidelines
- Installs on Ceiling and Standard Junction Boxes
- Dimmable to 10% on Compatible TRIAC Dimmers
- 5-Year, 50,000 Hr Warranty
- CEC T24 JA8 Compliant
- NEC Compliant, Suitable for Use in Closet
- Energy Star Certified for 5", 7", 9"

#### Product Warranty\*

5-Year Warranty



50,000 Hrs



\* Standard warranty. Extended warranty available.

Archipelago Lighting, Inc.

| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

[Contact Us](#)



LDLL | Eclipse-II



Project Details

Project Name:

Fixture Schedule:

Project Number:

Notes:

Highlights

Key Specifications

Features		Description
5-CCTselect		CCT selectable: 5-way dip-switch
Sensor Ready		Optional plug-n-play motion sensor available on 7" and 9"
TruColor High CRI		Title 24 Compliant. JA8 LED 90CRI+
Limited Warranty		5-Year Warranty

- Input Voltage: 120V
- Dimming: TRIAC
- Efficacy: ≤103lm/W
- IP: Suitable for Wet Location
- Housing: Die-Cast Aluminum
- Power Factor (PF): >0.9 Non-Flicker
- Operating Temperature: -4°F - 113°F
- Total Harmonic Distortion (THD): <20%
- Beam Angle (°): 120°

Certifications



Model Specifications

Model	Size (in)	Wattage (W)	Lumen (lm)	Efficacy (lm/W)	5-CCTselect (K) <sup>1</sup>	Voltage (V)	CRI
LDLL0510	5"	10W	671lm 675lm 698lm 712lm 689lm	67lm/W 68lm/W 70lm/W 71lm/W 69lm/W	2700K 3000K 3500K 4000K 5000K	120V	90CRI+
LDLL0715	7"	15W	1,187lm 1,205lm 1,211lm 1,257lm 1,241lm	79lm/W 80lm/W 81lm/W 84lm/W 83lm/W	2700K 3000K 3500K 4000K 5000K		
LDLL0918	9"	18W	1,409lm 1,415lm 1,436lm 1,460lm 1,442lm	78lm/W 79lm/W 80lm/W 81lm/W 80lm/W	2700K 3000K 3500K 4000K 5000K		
LDLL1121	11"	21W	2,022lm 2,035lm 2,054lm 2,165lm 2,159lm	96lm/W 97lm/W 98lm/W 103lm/W 103lm/W	2700K 3000K 3500K 4000K 5000K		
LDLL1324	13"	24W	2,393lm 2,407lm 2,450lm 2,455lm 2,446lm	100lm/W 100lm/W 102lm/W 102lm/W 102lm/W	2700K 3000K 3500K 4000K 5000K		


1. Default settings on CCTselect is highest CCT available.

Archipelago Lighting, Inc.

| Headquarter: 4615 State Street, Montclair, CA 91763  
| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

www.archipelagolighting.com  
+1 (866) 912-3220

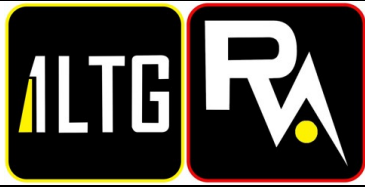

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 78  
[Go to Bill of Materials](#)

Type: SM1

Powered by 4submittal.com



LDLL | Eclipse-II

**Low-Glare Lens**  
Smooth diffused light output.

**Driverless**  
Minimizes installation height.

**IP54**  
Suitable for damp locations.

**Solid Backplate**  
Passive heat dissipation.

**Edge-Lit Technology**  
Even and uniform light distribution.

**PMMA Lens**  
Durable, no-yellowing lens.



#### Ordering Guide<sup>1</sup>

Model Series	Size (in) / Wattage (W)	Series	CCTselect (K)	Finish Color
<b>LDLL</b> LED Surface Mount Puck Downlight	<b>0510</b> 5inch / 10W <b>0715</b> 7inch / 15W <b>0918</b> 9inch / 18W <b>1121</b> 11inch / 21W <b>1324</b> 13inch / 24W	- <b>E2</b> Eclipse-II	<b>S5</b> 5-CCTselect: 2700K 3000K 3500K 4000K 5000K	/ <b>B</b> Black <b>W</b> White
<b>CATALOG #:</b>				
<b>LDLL</b>		- <b>E2</b>	<b>S5</b>	/

#### Options Guide<sup>2</sup>

EM Driver <sup>3</sup>	Motion Sensor
<input type="checkbox"/> <b>EM15</b> 15W EM Driver <input type="checkbox"/> <b>CRCU</b> 15W EM Driver with Junction Box	<input type="checkbox"/> <b>MSP/W</b> PIR Bi-Level Sensor for 7" and 9" ONLY (White Finish)
<b>OPTIONAL ACCESSORIES #:</b>	

NOTE:

1. Only one selection may be applicable within the same category.
2. Multiple selections may be applicable within the same option category. See Compatible Accessories below for details.
3. EM drivers only work with 7, 9, 11 and 13in fixtures

Archipelago Lighting, Inc.

| **Headquarter:** 4615 State Street, Montclair, CA 91763


| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

**Contact Us**

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220








	Date: 1/12/2026	<b>Description:</b> LDLL0510-E2S5/W	<b>Line Item#:</b> 78 <a href="#">Go to Bill of Materials</a>
	<b>Project:</b> FINDLAY FLATS		<b>Type:</b> SM1
			Powered by 4submittal.com



LDLL | Eclipse-II

Sizing & Measurements


Model Series	Dimensions	Overall Diameter (in)	Depth (IN)
LDLL0510-E2		5.51	0.79
LDLL0715-E2		7.48	0.82
LDLL0918-E2		8.86	0.79
LDLL1121-E2		10.98	0.98
LDLL1124-E2		12.80	0.98

Recommended Dimmers

Make	Models			
Lutron	TG-600PR-WH S-600PR-WH CTCL-153PDH-WH	TGCL-153PH-LA SLV-600P-AL DV-600PR-WH	SCL-153PH-WH GT-600P DVCL-153P	MSCL-OP153M MACL-153M//MA-R PD-6WCL
Leviton	6672 IPL06	6674	DSL06	RNL06

Accessories (Standard)

Accessories (Optional)



<b>Mounting Bracket</b> Compatible to 2.75" or 3.50" Junction Box	<b>Wire Nuts</b>	<b>Bolts</b>	<b>15W EM Driver</b> EM15-HMB/170DC CRCU-EM/JBM	<b>PIR Bi-Level Sensor</b> LDLL-E2/MSP/W
--	------------------	--------------	---	---



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 78  
[Go to Bill of Materials](#)


Type: SM1

Powered by 4submittal.com



LDLL | Eclipse-II

EM Driver / J-Box (Optional)

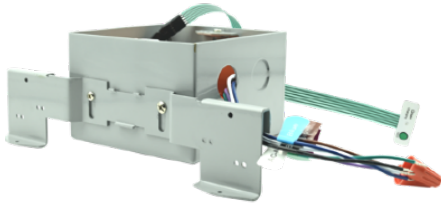

Technical Specification	CRCU-EM/JBM
Emergency Power	15W Max
Installation Method	Recessed
IP Rating	IP20
CEC T.24/JA8 Compliant	Yes
Color Finish	Grey
Physical Features	<ul style="list-style-type: none"><li>Directly connect to AC input</li><li>Fits 2.75" and 3.5" J-Box</li><li>Supports recessed in-ceiling mount</li></ul>
Self-Diagnostic Test Switch	<ol style="list-style-type: none"><li>Emergency conversion kit will go into emergency mode when test switch is pressed while main power is ON.</li><li>Will go into charging mode if test switch is not pressed.</li><li>In emergency mode, pressing the test switch for 3-seconds will inactivate emergency mode.</li></ol>
Indicator Status Light	<ol style="list-style-type: none"><li>Green ON: Charging mode / charging full</li><li>Green OFF: Mains power OFF / discharging mode</li></ol>
Dimension	<p>W4.29in x H2.96</p>

Archipelago Lighting, Inc.

| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 79  
[Go to Bill of Materials](#)

Type: SM2

Powered by 4submittal.com




LIGHTING | REINVENTED

plano **ARCH** PRO

## LDLL | Eclipse-II

Product Data Sheet

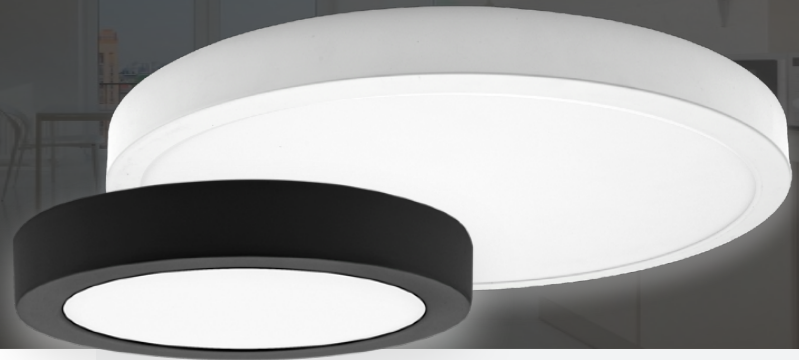

COMMERCIAL-GRADE

### LED Surface Mount Puck Downlight



CCTselect



TruColor Rendering

5" / 7" / 9" / 11" / 13"

#### Product Overview

**INTENDED USE** — The Eclipse-II Series is built for 5-way switchable CCT and is suitable for use in dry, damp, and wet locations, perfect for use in kitchens, hallways, stairways, bathrooms, closets, and just about anywhere you'd need it.

**CONSTRUCTION** — The die-cast aluminum housing is designed for durability and ruggedness.

**INSTALLATION** — Quick-mount aluminum backplate for easy installation.

**WARRANTY** — Featuring a no-compromise 5-year warranty, Energy Star and JA8-compliant, the Eclipse-II is a clean and modern solution for surface mounted driverless design.

ARCHIPELAGO luminaires and LED components undergo rigorous testing by an independent laboratory to meet IESNA LM-79 and LM-80 standards for light output and lumen maintenance. LED color temperature is warranted to shift no more than 180K over the standard warranty period. Correlated Color Temperature (CCT) follows the guidelines set forth in the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

#### Applications



Residential



Hallway



Patio



Entryway

#### Main Features

- Low-Profile Edge-Lit Surface Mount Design
- Durable Di-Cast Aluminum Trim w/ Frosted Lens
- For New Construction or Retrofit Applications
- Suitable for Use in Dry, Damp and Wet Locations
- Suitable for Use in Closets, In Accordance to NEC Guidelines
- Installs on Ceiling and Standard Junction Boxes
- Dimmable to 10% on Compatible TRIAC Dimmers
- 5-Year, 50,000 Hr Warranty
- CEC T24 JA8 Compliant
- NEC Compliant, Suitable for Use in Closet
- Energy Star Certified for 5", 7", 9"

#### Product Warranty\*

5-Year Warranty



50,000 Hrs



\* Standard warranty. Extended warranty available.

Archipelago Lighting, Inc.

| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

[Contact Us](#)



LDLL | Eclipse-II



Project Details

Project Name:

Fixture Schedule:

Project Number:

Notes:

Highlights

Features		Description
5-CCTselect		CCT selectable: 5-way dip-switch
Sensor Ready		Optional plug-n-play motion sensor available on 7" and 9"
TruColor High CRI		Title 24 Compliant. JA8 LED 90CRI+
Limited Warranty		5-Year Warranty

Key Specifications

- Input Voltage: 120V
- Dimming: TRIAC
- Efficacy: ≤103lm/W
- IP: Suitable for Wet Location
- Housing: Die-Cast Aluminum
- Power Factor (PF): >0.9 Non-Flicker
- Operating Temperature: -4°F - 113°F
- Total Harmonic Distortion (THD): <20%
- Beam Angle (°): 120°

Certifications



Model Specifications

Model	Size (in)	Wattage (W)	Lumen (lm)	Efficacy (lm/W)	5-CCTselect (K) <sup>1</sup>	Voltage (V)	CRI
LDLL0510	5"	10W	671lm 675lm 698lm 712lm 689lm	67lm/W 68lm/W 70lm/W 71lm/W 69lm/W	2700K 3000K 3500K 4000K 5000K	120V	90CRI+
LDLL0715	7"	15W	1,187lm 1,205lm 1,211lm 1,257lm 1,241lm	79lm/W 80lm/W 81lm/W 84lm/W 83lm/W	2700K 3000K 3500K 4000K 5000K		
LDLL0918	9"	18W	1,409lm 1,415lm 1,436lm 1,460lm 1,442lm	78lm/W 79lm/W 80lm/W 81lm/W 80lm/W	2700K 3000K 3500K 4000K 5000K		
LDLL1121	11"	21W	2,022lm 2,035lm 2,054lm 2,165lm 2,159lm	96lm/W 97lm/W 98lm/W 103lm/W 103lm/W	2700K 3000K 3500K 4000K 5000K		
LDLL1324	13"	24W	2,393lm 2,407lm 2,450lm 2,455lm 2,446lm	100lm/W 100lm/W 102lm/W 102lm/W 102lm/W	2700K 3000K 3500K 4000K 5000K		

1. Default settings on CCTselect is highest CCT available.

Archipelago Lighting, Inc.

Headquarter: 4615 State Street, Montclair, CA 91763  
USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

www.archipelagolighting.com  
+1 (866) 912-3220



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 79  
[Go to Bill of Materials](#)

Type: SM2

Powered by 4submittal.com



LDLL | Eclipse-II

**Low-Glare Lens**  
Smooth diffused light output.

**Driverless**  
Minimizes installation height.

**IP54**  
Suitable for damp locations.

**Solid Backplate**  
Passive heat dissipation.

**Edge-Lit Technology**  
Even and uniform light distribution.

**PMMA Lens**  
Durable, no-yellowing lens.



#### Ordering Guide<sup>1</sup>

Model Series	Size (in) / Wattage (W)	Series	CCTselect (K)	Finish Color
<b>LDLL</b> LED Surface Mount Puck Downlight	<b>0510</b> 5inch / 10W <b>0715</b> 7inch / 15W <b>0918</b> 9inch / 18W <b>1121</b> 11inch / 21W <b>1324</b> 13inch / 24W	- <b>E2</b> Eclipse-II	<b>S5</b> 5-CCTselect: 2700K 3000K 3500K 4000K 5000K	/ <b>B</b> Black <b>W</b> White
<b>CATALOG #:</b>				
<b>LDLL</b>		- <b>E2</b>	<b>S5</b>	/

#### Options Guide<sup>2</sup>

EM Driver <sup>3</sup>	Motion Sensor
<input type="checkbox"/> <b>EM15</b> 15W EM Driver <input type="checkbox"/> <b>CRCU</b> 15W EM Driver with Junction Box	<input type="checkbox"/> <b>MSP/W</b> PIR Bi-Level Sensor for 7" and 9" ONLY (White Finish)
<b>OPTIONAL ACCESSORIES #:</b>	

NOTE:

1. Only one selection may be applicable within the same category.
2. Multiple selections may be applicable within the same option category. See Compatible Accessories below for details.
3. EM drivers only work with 7, 9, 11 and 13in fixtures

Archipelago Lighting, Inc.


| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

**Contact Us**

[www.archipelagolighting.com](http://www.archipelagolighting.com)






+1 (866) 912-3220

	Date: 1/12/2026	Description: LDLL0510-E2S5/W	Line Item#: 79
	Project: FINDLAY FLATS		<a href="#">Go to Bill of Materials</a>
			Type: SM2
Powered by 4submittal.com			



LDLL | Eclipse-II

Sizing & Measurements


Model Series	Dimensions	Overall Diameter (in)	Depth (IN)
LDLL0510-E2		5.51	0.79
LDLL0715-E2		7.48	0.82
LDLL0918-E2		8.86	0.79
LDLL1121-E2		10.98	0.98
LDLL1124-E2		12.80	0.98

Recommended Dimmers

Make	Models			
Lutron	TG-600PR-WH S-600PR-WH CTCL-153PDH-WH	TGCL-153PH-LA SLV-600P-AL DV-600PR-WH	SCL-153PH-WH GT-600P DVCL-153P	MSCL-OP153M MACL-153M//MA-R PD-6WCL
Leviton	6672 IPL06	6674	DSL06	RNL06

Accessories (Standard)

Accessories (Optional)



<b>Mounting Bracket</b>	<b>Wire Nuts</b>	<b>Bolts</b>	<b>15W EM Driver</b>	<b>PIR Bi-Level Sensor</b>
Compatible to 2.75" or 3.50" Junction Box			EM15-HMB/170DC CRCU-EM/JBM	LDLL-E2/MSP/W

Archipelago Lighting, Inc.


| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220

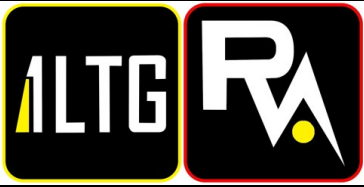

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 79  
[Go to Bill of Materials](#)


Type: SM2


Powered by 4submittal.com



LDLL | Eclipse-II

EM Driver / J-Box (Optional)

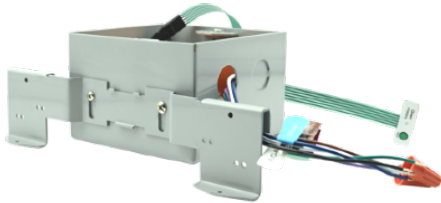

Technical Specification	CRCU-EM/JBM
Emergency Power	15W Max
Installation Method	Recessed
IP Rating	IP20
CEC T.24/JA8 Compliant	Yes
Color Finish	Grey
Physical Features	<ul style="list-style-type: none"><li>Directly connect to AC input</li><li>Fits 2.75" and 3.5" J-Box</li><li>Supports recessed in-ceiling mount</li></ul>
Self-Diagnostic Test Switch	<ol style="list-style-type: none"><li>Emergency conversion kit will go into emergency mode when test switch is pressed while main power is ON.</li><li>Will go into charging mode if test switch is not pressed.</li><li>In emergency mode, pressing the test switch for 3-seconds will inactivate emergency mode.</li></ol>
Indicator Status Light	<ol style="list-style-type: none"><li>Green ON: Charging mode / charging full</li><li>Green OFF: Mains power OFF / discharging mode</li></ol>
Dimension	W4.29in x H2.96 

Archipelago Lighting, Inc.


| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220

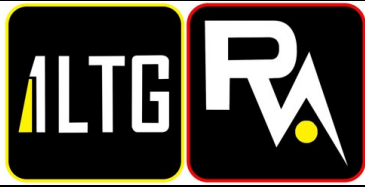

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 80  
[Go to Bill of Materials](#)

Type: SM3

Powered by 4submittal.com




LIGHTING | REINVENTED

plano **ARCH** PRO

## LDLL | Eclipse-II

Product Data Sheet

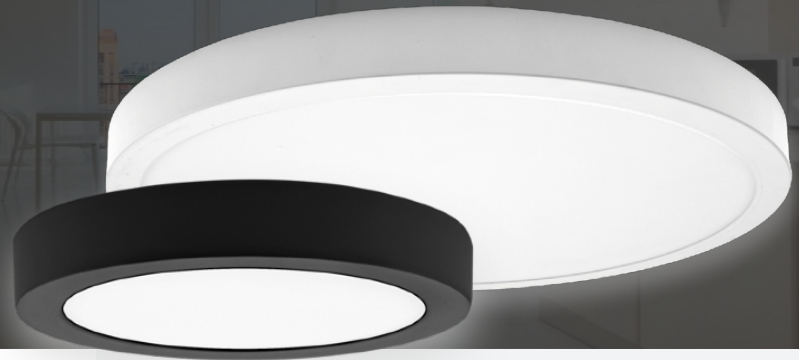

COMMERCIAL-GRADE

### LED Surface Mount Puck Downlight



CCTselect



TruColor Rendering

5" / 7" / 9" / 11" / 13"

#### Product Overview

**INTENDED USE** — The Eclipse-II Series is built for 5-way switchable CCT and is suitable for use in dry, damp, and wet locations, perfect for use in kitchens, hallways, stairways, bathrooms, closets, and just about anywhere you'd need it.

**CONSTRUCTION** — The die-cast aluminum housing is designed for durability and ruggedness.

**INSTALLATION** — Quick-mount aluminum backplate for easy installation.

**WARRANTY** — Featuring a no-compromise 5-year warranty, Energy Star and JA8-compliant, the Eclipse-II is a clean and modern solution for surface mounted driverless design.

ARCHIPELAGO luminaires and LED components undergo rigorous testing by an independent laboratory to meet IESNA LM-79 and LM-80 standards for light output and lumen maintenance. LED color temperature is warranted to shift no more than 180K over the standard warranty period. Correlated Color Temperature (CCT) follows the guidelines set forth in the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

#### Applications



Residential



Hallway



Patio



Entryway

#### Main Features

- Low-Profile Edge-Lit Surface Mount Design
- Durable Di-Cast Aluminum Trim w/ Frosted Lens
- For New Construction or Retrofit Applications
- Suitable for Use in Dry, Damp and Wet Locations
- Suitable for Use in Closets, In Accordance to NEC Guidelines
- Installs on Ceiling and Standard Junction Boxes
- Dimmable to 10% on Compatible TRIAC Dimmers
- 5-Year, 50,000 Hr Warranty
- CEC T24 JA8 Compliant
- NEC Compliant, Suitable for Use in Closet
- Energy Star Certified for 5", 7", 9"

#### Product Warranty\*

5-Year Warranty



50,000 Hrs



\* Standard warranty. Extended warranty available.

Archipelago Lighting, Inc.

| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

[Contact Us](#)







Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W


Line Item#: 80  
[Go to Bill of Materials](#)

Type: SM3

Powered by 4submittal.com



LDLL | Eclipse-II

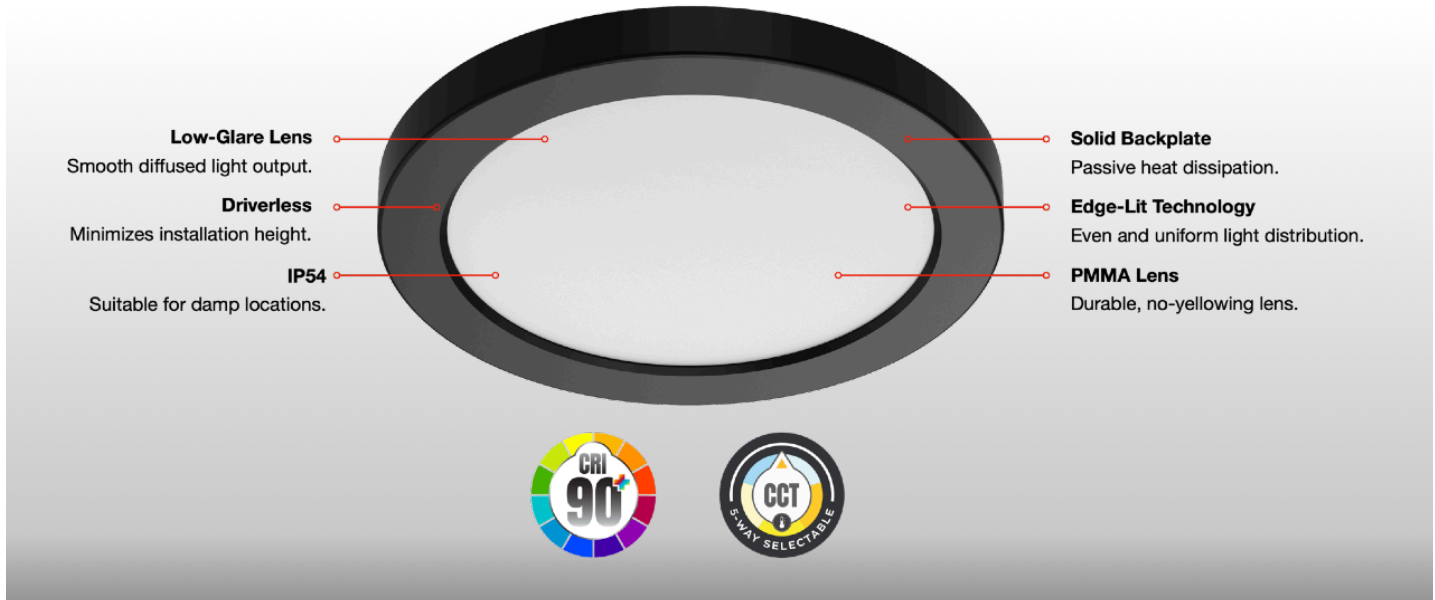

#### Ordering Guide<sup>1</sup>

Model Series	Size (in) / Wattage (W)	Series	CCTselect (K)	Finish Color
<b>LDLL</b> LED Surface Mount Puck Downlight	<b>0510</b> 5inch / 10W <b>0715</b> 7inch / 15W <b>0918</b> 9inch / 18W <b>1121</b> 11inch / 21W <b>1324</b> 13inch / 24W	- <b>E2</b> Eclipse-II	<b>S5</b> 5-CCTselect: 2700K 3000K 3500K 4000K 5000K	/ <b>B</b> Black <b>W</b> White
<b>CATALOG #:</b>				
<b>LDLL</b>		- <b>E2</b>	<b>S5</b>	/

#### Options Guide<sup>2</sup>

EM Driver <sup>3</sup>	Motion Sensor
<input type="checkbox"/> <b>EM15</b> 15W EM Driver <input type="checkbox"/> <b>CRCU</b> 15W EM Driver with Junction Box	<input type="checkbox"/> <b>MSP/W</b> PIR Bi-Level Sensor for 7" and 9" ONLY (White Finish)
<b>OPTIONAL ACCESSORIES #:</b>	

NOTE:

1. Only one selection may be applicable within the same category.
2. Multiple selections may be applicable within the same option category. See Compatible Accessories below for details.
3. EM drivers only work with 7, 9, 11 and 13in fixtures

Archipelago Lighting, Inc.


| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)






+1 (866) 912-3220

	Date: 1/12/2026	Description: LDLL0510-E2S5/W	Line Item#: 80
	Project: FINDLAY FLATS		<a href="#">Go to Bill of Materials</a>
			Type: SM3
Powered by 4submittal.com			



LDLL | Eclipse-II

Sizing & Measurements

Model Series	Dimensions	Overall Diameter (in)	Depth (IN)
LDLL0510-E2		5.51	0.79
LDLL0715-E2		7.48	0.82
LDLL0918-E2		8.86	0.79
LDLL1121-E2		10.98	0.98
LDLL1124-E2		12.80	0.98

Recommended Dimmers

Make	Models			
Lutron	TG-600PR-WH S-600PR-WH CTCL-153PDH-WH	TGCL-153PH-LA SLV-600P-AL DV-600PR-WH	SCL-153PH-WH GT-600P DVCL-153P	MSCL-OP153M MACL-153M//MA-R PD-6WCL
Leviton	6672 IPL06	6674	DSL06	RNL06

Accessories (Standard)

Accessories (Optional)



<b>Mounting Bracket</b>	<b>Wire Nuts</b>	<b>Bolts</b>	<b>15W EM Driver</b>	<b>PIR Bi-Level Sensor</b>
Compatible to 2.75" or 3.50" Junction Box			EM15-HMB/170DC CRCU-EM/JBM	LDLL-E2/MSP/W

Archipelago Lighting, Inc.

| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 80  
[Go to Bill of Materials](#)


Type: SM3


Powered by 4submittal.com



LDLL | Eclipse-II

EM Driver / J-Box (Optional)

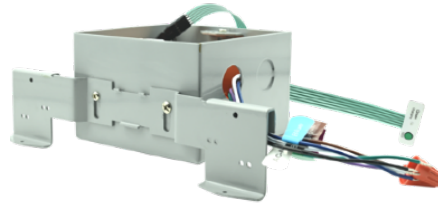

Technical Specification	CRCU-EM/JBM
Emergency Power	15W Max
Installation Method	Recessed
IP Rating	IP20
CEC T.24/JA8 Compliant	Yes
Color Finish	Grey
Physical Features	<ul style="list-style-type: none"><li>Directly connect to AC input</li><li>Fits 2.75" and 3.5" J-Box</li><li>Supports recessed in-ceiling mount</li></ul>
Self-Diagnostic Test Switch	<ol style="list-style-type: none"><li>Emergency conversion kit will go into emergency mode when test switch is pressed while main power is ON.</li><li>Will go into charging mode if test switch is not pressed.</li><li>In emergency mode, pressing the test switch for 3-seconds will inactivate emergency mode.</li></ol>
Indicator Status Light	<ol style="list-style-type: none"><li>Green ON: Charging mode / charging full</li><li>Green OFF: Mains power OFF / discharging mode</li></ol>
Dimension	W4.29in x H2.96 

Archipelago Lighting, Inc.

| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220



Date: 1/12/2026

Project:  
FINDLAY FLATSDescription:  
LED-BPL-2X2-3M40-5CCTLine Item#: 81  
[Go to Bill of Materials](#)


Type: SM8

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## LED Panels: BackLit Line

### 5-CCT & 3-Power Selectable

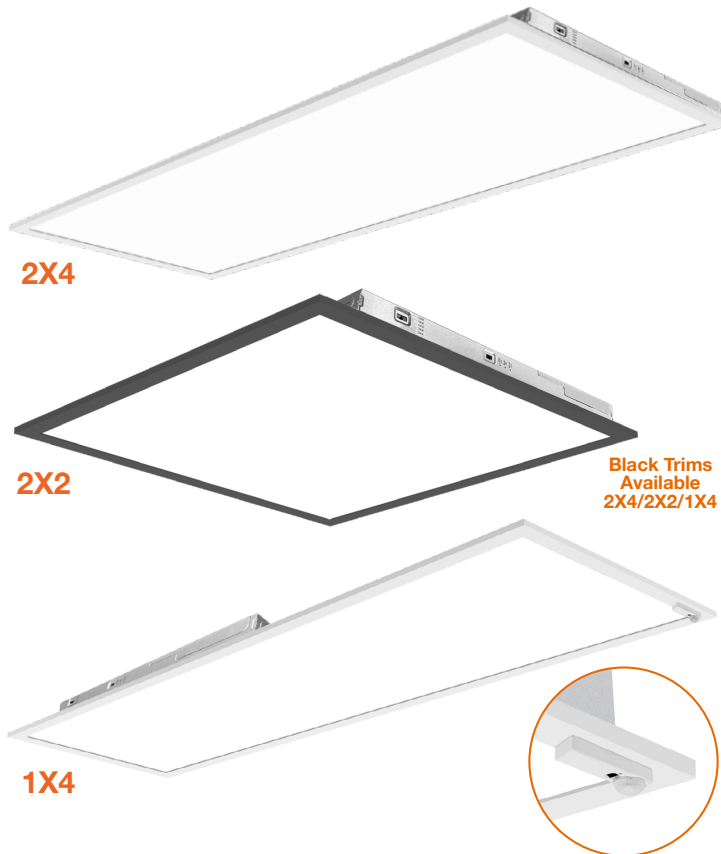Black Trims  
Available  
2X4/2X2/1X4Shown with  
Sensor Option

Regular Versions		HL Versions	
WATT	LUMENS	WATT	LUMENS
20	2,200	30	3,750
30	3,300	40	5,000
40	4,400	45	5,625
50	5,500	50	6,250
		55	6,875
		65	8,125



#### Detail Specifications:

- Finish: White, Custom finishes available
- IP Rating: Damp Location (IP44)
- 5CCT: 30/35/40/50/65K
- Beam Angle: 110°
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 114° F
- Lens: PS (polystyrene) frosted, non-yellowing, & shatter resistant
- Average life (L70) of 50,000 hours
- IC Rated

#### Applications:

- General Indoor Lighting
- Utility & Storage
- Garage Structures
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality
- Commercial and Industrial

#### Product Information:

- Metal housing finished with corrosion free power coat
- Even light distribution
- Lightweight for easier installation
- Select-n-Switch Technology: 5-CCT + 3-Power Selectable
- Control Options:
  - Standard Sensors
  - SILVAIR Bluetooth Mesh
  - ENVISIONLS Bluetooth
  - [Click Here](#) for More Information

#### Driver Options:

- UNV: 120-277V 0-10V Dimmable (Dim to Off)
- Optional 347-480V step down transformer available
- Standard EMB used:
  - 40W: 8W EMB ([LED-EMB-8W-HV-0-10V-2P](#))
  - 50W: 15W EMB ([LED-EMB-15W-HV-0-10V-2P](#))
- Higher wattage emb (up to 25W) available by request. Pricing will vary.
- THD: <15% (+/-5% tolerance), PF >0.9, 50/60Hz
- Isolated Driver
- Flicker Free

#### Mounting & Installations:

- Lay-in ceilings for 5/8" and 3/8" ceiling widths
- Built-in earthquake clips
- Optional 9' suspension kit available
- Optional surface mount, drywall kit available
- Use surface mount and suspension kit for an aesthetically pleasing design

#### Certifications:

- ETL Listed for USA and CA
- DLC Listed/ DLC Premium Listed (HL Versions)
  - View DLC ID Chart below
- NSF Rated
- Approved for CA T24
- 5 Year Limited Warranty

Series	Sensor	Emergency	Driver <sup>1</sup>	Whip
LED-BPL-2X2-3M40-5CCT	(blank)	(blank)	(blank)	(blank)
20/30/40W	No Sensor	No	120-277V	No Whip
LED-BPL-2X2-3M50-5CCT-HL	SR	Emergency	HV	-6FLX
30/40/50W	Sensor Ready	Emergency	347-480V	6' Flex
LED-BPL-2X4-3M50-5CCT	(See sensor options)	Backup	Stepdown	
30/40/50W				
LED-BPL-2X4-3M65-5CCT-HL				
45/55/65W				
LED-BPL-1X4-3M40-5CCT				
20/30/40W				

1. HV: High voltage is made to order.

#### Optional Accessories (Order Separately)


Sensors	Suspension Kits	Surface Mount Kits	Drywall Kits	Color Trims
<b>S-AUD-PIR-1</b>	<b>SK-10FT-Y-LC-CB</b>	<b>2X2-SM-3"</b>	<b>LED-PNL-2X2-FLNG</b>	<b>BPL-2X2-TRIM-BL</b>
PIR Bi-Level	10' Suspension Kit	3" Height	<b>LED-PNL-2X4-FLNG</b>	2x2 Black Trim
Motion + Daylight	<b>SK-20FT-Y-LC-CB</b>	<b>2X4-SM-3"</b>	<b>LED-PNL-1X4-FLNG</b>	<b>BPL-2X4-TRIM-BL</b>
Sensor Remote	20' Suspension Kit	3" Height		2x4 Black Trim
Required:	<b>CK-6FT-V</b>	<b>1X4-SM-3"</b>		<b>BPL-1X4-TRIM-BL</b>
(S-LINE-R)	6' Chain Hanging Kit	3" Height		1x4 Black Trim
<b>S-AUD-PIR-BT</b>				
PIR ENVISIONLS				
Bluetooth Control				
<b>S-AUD-PIR-SL</b>				
PIR SILVAIR				
Bluetooth Mesh				

1. Custom height options available. Contact us.

Specs and model numbers are subject to change with or without notice. Customization of product is available.

**EnVision LED Lighting, Inc.**6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 12.24

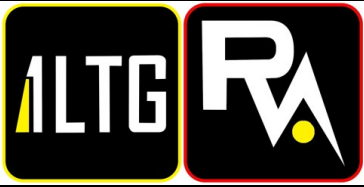

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-BPL-2X2-3M40-5CCT

Line Item#: 81  
[Go to Bill of Materials](#)

Type: SM8


Powered by 4submit.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM


## LED Panels: BackLit Line


### 5-CCT & 3-Power Selectable

#### FEATURES

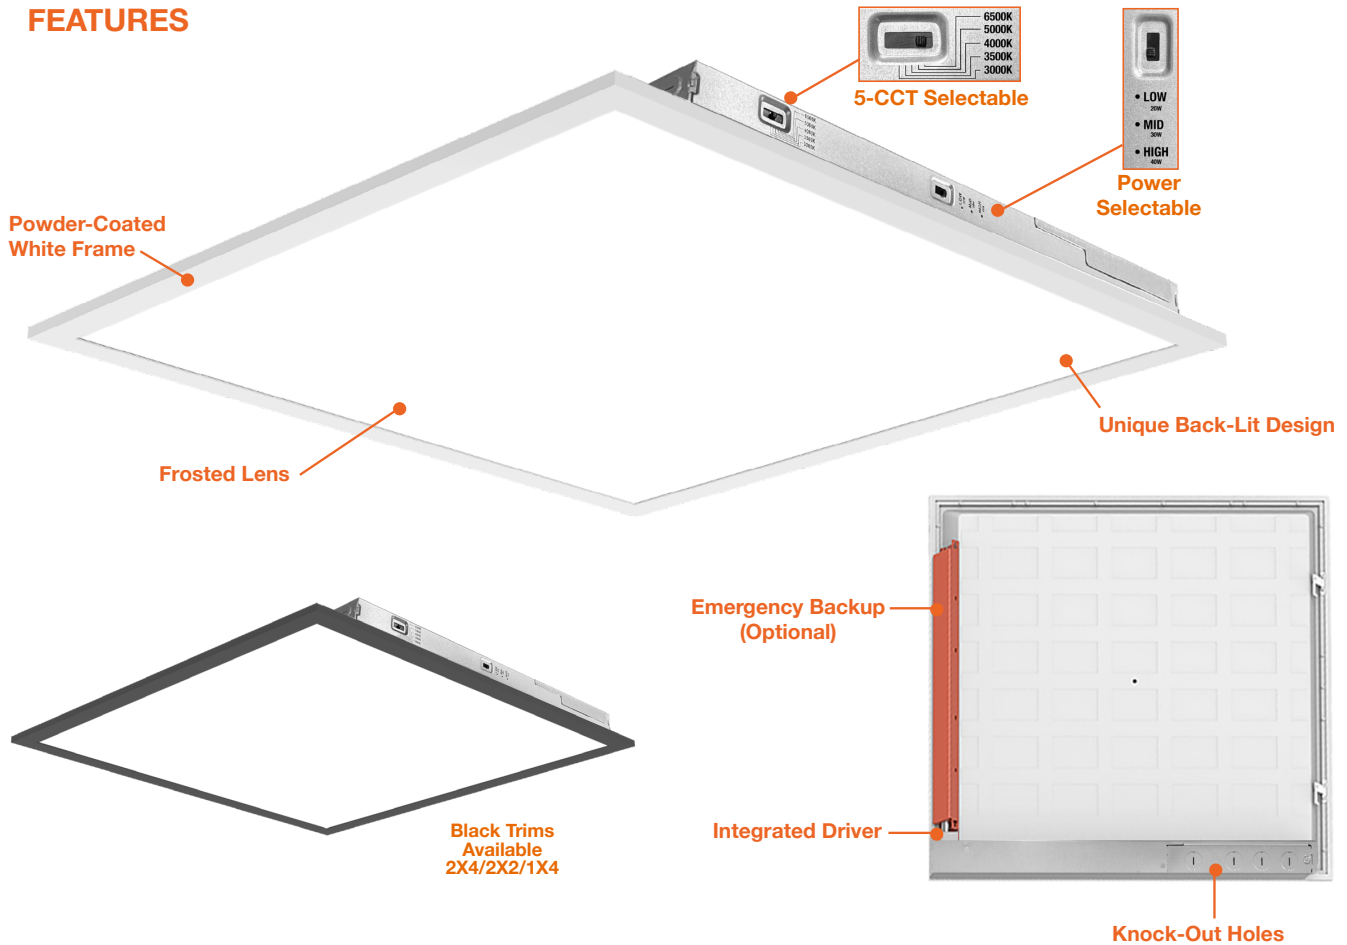

#### DIMENSIONS

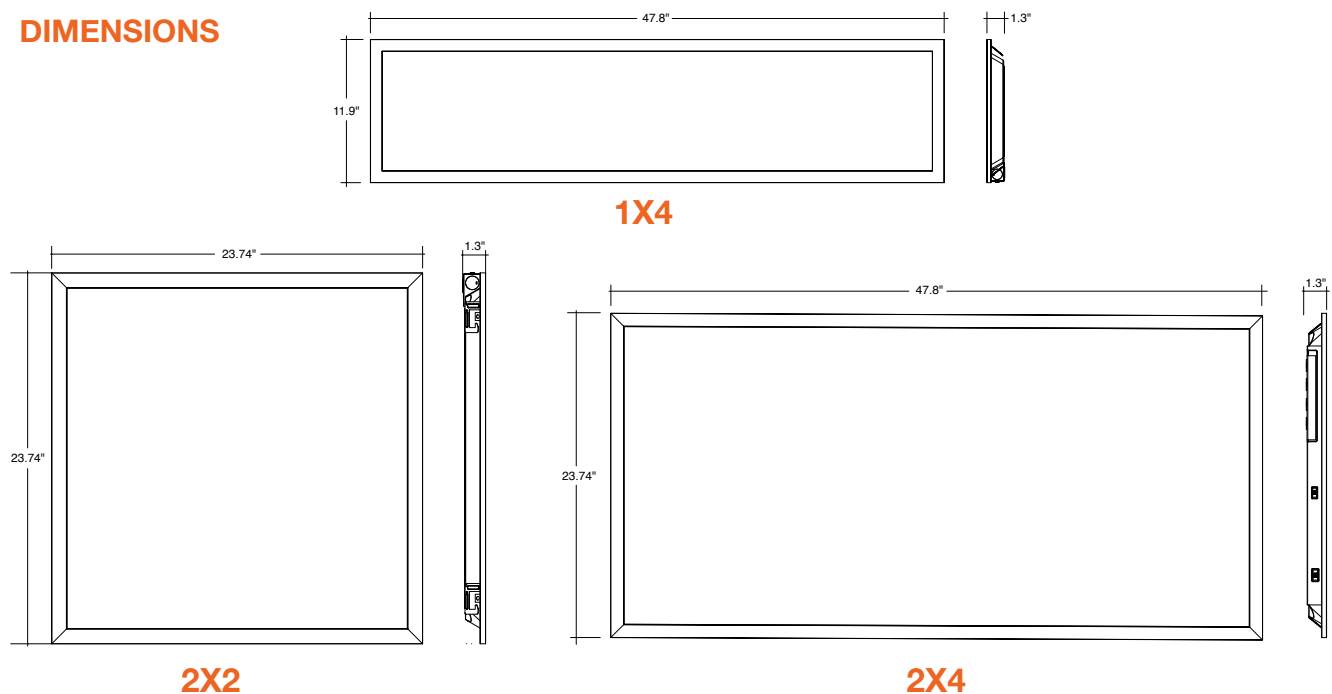

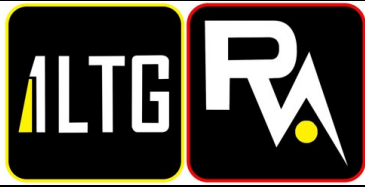

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-BPL-2X2-3M40-5CCT

Line Item#: 81  
[Go to Bill of Materials](#)

Type: SM8

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## LED Panels: BackLit Line 5-CCT & 3-Power Selectable

### ACCESSORIES




SK-10FT-Y-LC-CB  
SK-20FT-Y-LC-CB



CK-6FT-V




S-AUD-PIR-1  
S-AUD-PIR-BT  
S-AUD-PIR-SL

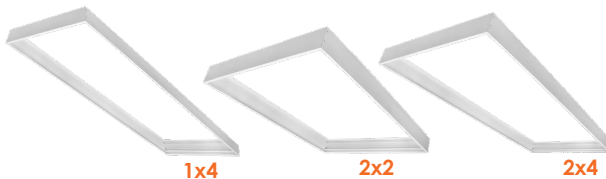

1x4

2x2

2x4

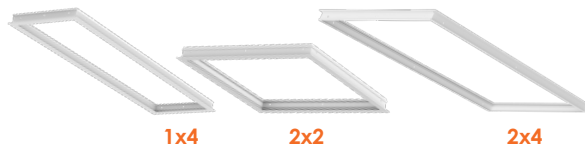

1x4

2x2

2x4



2x2



1x4



2x4

Model	Voltage	Watts	Lumens	Color	CRI
LED-BPL-2X2-3M40-5CCT	120/277V	20/30/40w	2600/3900/4400	30/35/40/50/65k	>80
LED-BPL-2X2-3M50-5CCT-HL	120/277V	30/40/50w	3900/4400/5500	30/35/40/50/65k	>80
LED-BPL-2X4-3M50-5CCT	120/277V	30/40/50w	3900/4400/5500	30/35/40/50/65k	>80
LED-BPL-2X4-3M65-5CCT-HL	120/277V	45/55/65w	5625/6875/8125	30/35/40/50/65k	>80
LED-BPL-1X4-3M40-5CCT	120/277V	20/30/40w	2600/3900/4400	30/35/40/50/65k	>80

### SUSPENSION KITS

Accessory	Description
SK-10FT-Y-LC-CB	10' Suspension Kit
SK-20FT-Y-LC-CB	20' Suspension Kit
CK-6FT-V	6' Chain Hanging Kit
LED-PNL-2X4-SK	3.5' Suspension Kit, works for all sizes

### SENSORS

Accessory Model	Description
S-AUD-PIR-1	PIR Bi-Level Motion + Daylight Sensor Remote Required: (S-LINE-R)
S-AUD-PIR-BT	PIR ENVISIONLS Bluetooth Control
S-AUD-PIR-SL	PIR SILVAIR Bluetooth Mesh

### SURFACE MOUNT KITS

Accessory	Description
2X2-SM-3"	2X2 Surface Mount Kit 3" Height for all Panels and Troffers
2X4-SM-3"	2X4 Surface Mount Kit 3" Height for all Panels and Troffers
1x4-SM-3"	1X4 Surface Mount Kit 3" Height for all Panels and Troffers

### DRYWALL KITS

Accessory	Description
LED-PNL-2X2-FLNG	Flange (Drywall) Kit for Panels for all 2X2 Fixtures
LED-PNL-2X4-FLNG	Flange (Drywall) Kit for Panels for all 2X4 Fixtures
LED-PNL-1X4-FLNG	Flange (Drywall) Kit for Panels for all 1X4 Fixtures

### TRIMS


Accessory	Description
BPL-2X2-TRIM-BL	2x2 LED Panel: Backlit-Line Black Trim
BPL-1X4-TRIM-BL	1x4 LED Panel: Backlit-Line Black Trim
BPL-2X4-TRIM-BL	2x4 LED Panel: Backlit-Line Black Trim

Luminaires for Ambient Lighting of - DLC Product ID:

LED-BPL-2x2-3M40-5CCT	S-IMBE52 (Standard)
LED-BPL-2x4-3M50-5CC	S-U0267J (Standard)
LED-BPL-1x4-3M40-5CCT	S-DR8V2E (Standard)
LED-BPL-2x2-3M50-5CCT-HL	S-V26054 (Standard)
LED-BPL-2x4-3M65-5CCT-HL	S-WNV8KG (Premium)

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

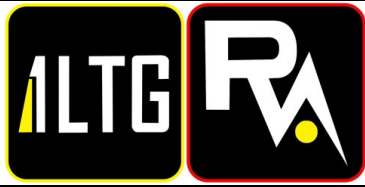

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-BPL-2X2-3M40-5CCT









Line Item#: 81  
[Go to Bill of Materials](#)

Type: SM8

Powered by 4submittal.com


## EnVisionLED™ Control Options

EnVision LED offers 3 control systems compatible with our LED Fixtures for projects of all sizes and budgets.

	Basic Controls	EnVisionLS 	EnVisionLED™ x SILVAIR 
<b>Description</b>	Standard Plug In Sensors	Basic Bluetooth Wireless Control	Advanced Bluetooth Wireless Control
<b>Recommended Quantity</b> (but not limited to)	N/A	>40-50 Nodes	>50 Nodes
<b>Maximum Zone Quantity</b>	N/A	100	3,000
<b>Commissioning Tool</b>	Remote Only	  ENVISIONLS App 	  SILVAIR App 
<b>Commissioning Process</b>	Individually Set via Remote	Wireless Must be done on site	Wireless- Initial linking must be done on site. Commissioning can be done via desktop remotely.
<b>Floor Plan Upload</b>	N/A	N/A	Yes Add a floor plan and mark luminaires & zones via desktop
<b>Gateway</b>	N/A	N/A	Required only for energy monitoring, advanced scheduling, automated demand response.
<b>Individual Luminaire Control</b>	Yes	Yes	Yes
<b>Luminaire Grouping Zoning</b>	N/A	Yes	Yes
<b>High End Power Low End Power</b>	Yes but limited (View Remote)	Yes	Yes
<b>Cost</b>	\$	\$\$	\$\$\$
<b>DLC NLC Listed</b>	N/A	Yes	Yes
<b>Energy Monitoring &amp; Data Reporting</b>	N/A	N/A	Monitor energy usage per individual zone & retrofit cost savings calculation + detailed reporting





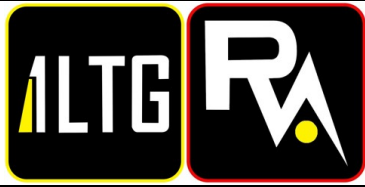

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-BPL-2X2-3M40-5CCT

Line Item#: 81  
[Go to Bill of Materials](#)

Type: SM8

Powered by 4submittal.com





## Compatible Products:

EnVision offers a variety of nodes, sensors, & gateways that are controlled via remote, ENVISIONLS Bluetooth Mesh & SILVAIR Bluetooth Mesh on all of our 0-10V dimmable fixtures.






### Individual Fixture Controls: PIR Sensor, Bi-Level Dimming, Daylight


Basic Note: -1 • ENVISIONLS Models Note: -BT • SILVAIR Models Note: -SL

	MODEL #	DESIGN	RECOMMENDED FIXTURE	FEATURES
	S-TWC-PIR-1 S-TWC-PIR-BT S-TWC-PIR-SL	Twist-C Control Sensor	Sensor Ready Fixtures: Area Lights, Canopies, Flood Lights, High Bays	All models are equipped with PIR occupancy sensing, high & low end bi-level dimming, & daylight sensing.
	S-TWC-90 + S-TWC-PIR-1 S-TWC-90 + S-TWC-PIR-BT S-TWC-90 + S-TWC-PIR-SL	Twist-C Control Sensor + 90 Degree Arm	Cylinders, Strips, Wall Packs	
	S-AUD-PIR-1 S-AUD-PIR-BT S-AUD-PIR-SL	2.5m Audio Jack	Panels & Troffers	
	S-SN-PIR-1 S-SN-PIR-BT S-SN-PIR-SL	Snap In Sensor	Troffers & Wraps	

### Group Controls ENVISIONLS Models Note : -BT • SILVAIR Models Note: -SL

	MODEL #	DESIGN	VOLTAGE	FEATURES	RECOMMENDED FEATURES
	S-CM-PIR-LV-BT S-CM-PIR-LV-SL	Ceiling Mounted PIR Sensor	12-24V	PIR Sensor, Bi-Level Dimming, Daylight, 360° detection, 12' Max Mounting Height	Connects to 0-10V dimmable fixtures
	S-WM-PIR-CUNV-BT S-WM-PIR-CUNV-SL	Wall Mounted PIR Occupancy Sensor, Bi-Level Dimming, Daylight	120-277V	On/Off PIR occupancy sensor, 180° detection, 30' detection @ 4' Mounting Height	Connects to LED fixtures
	S-WS-120V-USB-SL		120V	Dimming Wall Socket, Two Sockets	Floor Lamps, Other Lamps

### Gateway (Silvaire Only) 4.5–5.5 V DC, 2A Power over Ethernet 36–57 V DC

	MODEL #	DESIGN	VOLTAGE	FEATURES	RECOMMENDED FEATURES
	SGW-102	Wall or Ceiling Mounted	POE	Advanced Energy Monitoring Control	Connects to Silvaire Controls. Gateway is not required.



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
SM56885FTSN

Line Item#: 82  
[Go to Bill of Materials](#)

Type: SM13

Powered by 4submittal.com


Essentials - 588x | SM56885FTSN

Job Name: Job Type: Quantity: Comments:



#### PRODUCT DESCRIPTION

Maxim Lighting's commitment to both the residential lighting and the home building industries will assure you a product line focused on your lighting needs. With Maxim Lighting you will find quality product that is well designed, well priced and readily available.



#### MEASUREMENTS

DIMENSION : 9" L x 9" W x 5" H  
HANGING WEIGHT : 2.18 lb

#### LAMPING

INPUT VOLTAGE : 120V  
BULB : 60W Incandescent E26 Medium , 120W Total  
BULB INCLUDED : (Not Included)  
DIMMABLE : Yes

#### FINISHES OPTION

Oil Rubbed Bronze (OI)  
 Satin Nickel (SN)

#### GLASS

Frosted FT

#### MATERIAL

Glass, Steel

#### RATINGS

cETLus  
Damp Location



#### ADDITIONAL

OPERATING TEMPERATURE:  
-20°C (-4°F), 40°C (104°F)

Always consult a qualified electrician before installing any lighting product.

# STUDIO•M

Modifications or Customizations: Please email [contract@studiomlighting.com](mailto:contract@studiomlighting.com)

Sample Request: Please email [order@studiomlighting.com](mailto:order@studiomlighting.com) with subject line

"Sample Order, [Project Name] / [Specifier/Designer]"

All samples are subject to Studio M approval and must show proof of project and/or explanation.

Job Name:	Job Type:
Quantity:	Comments:

StudioMlighting.com - 1.626.956.4209



Date: 1/12/2026

Project:  
FINDLAY FLATSDescription:  
LED-A19-9W-5CCTLine Item#: 83  
[Go to Bill of Materials](#)

Type: SM13 LAMP

Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COMProject: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_

LED Bulbs

**A Bulb SERIES: 5-CCT LED BULBS**



A-19, A-21



A-19



A-21

**Detail Specifications**

- IP Rating: Damp Location
- Beam Angle: 220°
- 5-CCT: 27/30/35/40/50K
- Chip: SMD 2835, R9 >50, CRI >90
- Operating Temperature: -4° - 114° F
- Average life (L70) of 25,000 hours

**Applications:**

- Decorative Lighting
- Interior Lighting
- Table & Floor Lamps
- Showcases
- Residential, Multi-Family, Commercial

**Product Information:**

- Suitable for use in existing fixtures
- Instant-On to full brightness

**Driver Options:**

- 120V
- Triac Dimmable
- PF >0.9, 50/60Hz

**Mounting & Installation:**

- E26 Socket
- Direct A Lamp Replacement

**Packaging:**

- All bulbs come in individual color boxes, but are sold in inner carton qty packs only

Carton Qty.	A-19	A-21
Inner Carton	10	10
Master Carton	100	100

**Certifications:**

- ETL Listed for USA and CA
- Energy Star
- Title 20 and JA8-2022 Approved
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

**Dimmer List:**

Leviton	6674
Lutron	LGCL-153P
Lutron	DVCL-153P
Lutron	CTCL-153P
Lutron	MAELV-300

**Series****LED-A19-9W-5CCT**

600 Lumens 60W Equivalent

**LED-A21-15W-5CCT**

1,600 Lumens 100W Equivalent

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 10.23



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
TS3-8FT-SM-WH

Line Item#: 84  
Go to Bill of Materials


Type: TL1

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## Linear Track & Accessories

### 3-Wire Single Circuit



	LENGTH	WIDTH	HEIGHT
TS3-2FT-SM 2' Nominal	24"	1 3/8"	1 1/16"
TS3-4FT-SM 4' Nominal	48"	1 3/8"	1 1/16"
TS3-8FT-SM 8' Nominal	96"	1 3/8"	1 1/16"



#### Item

TS3-2FT-SM-WH  
White  
TS3-2FT-SM-BL  
Black  
TS3-4FT-SM-WH  
White  
TS3-4FT-SM-BL  
Black  
TS3-8FT-SM-WH  
White  
TS3-8FT-SM-BL  
Black

#### Accessories

**TS3-SM-LIVE-WH**  
Live End: Required to start a run  
**TS3-SM-LIVE-BL**  
Live End: Required to start a run  
**TS3-SM-END-WH**  
End Cap: Required to end a run  
**TS3-SM-END-BL**  
End Cap: Required to end a run  
**TS3-SM-MJ-WH**  
Mini Joiner: Low profile joiner for two straight track sections  
**TS3-SM-MJ-BL**  
Mini Joiner: Low profile joiner for two straight track sections  
**TS3-SM-SC-WH**  
Straight Connector: Connect two track sections end to end with a center feed option  
**TS3-SM-SC-BL**  
Straight Connector: Connect two track sections end to end with a center feed option  
**TS3-SM-L-WH**  
L-Connector: Connect two track sections at a right angle  
**TS3-SM-L-BL**  
L-Connector: Connect two track sections at a right angle

**TS3-SM-T-WH**  
T-Connector: Connect two track sections at a T angle  
**TS3-SM-T-BL**  
T-Connector: Connect two track sections at a T angle  
**TS3-SM-X-WH**  
X-Connector: Connect two track sections at an cross angle  
**TS3-SM-X-BL**  
X-Connector: Connect two track sections at an cross angle  
**TS3-SM-FLX-WH**  
Flexible Connector: Connect two track sections at any angle up to 90°  
**TS3-SM-FLX-BL**  
Flexible Connector: Connect two track sections at any angle up to 90°  
**TS3-SM-FC-WH**  
Floating Canopy: Track can be connected to existing outlet box along the track.  
**TS3-SM-FC-BL**  
Floating Canopy: Track can be connected to existing outlet box

Project: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_

Track Lights



#### Detail Specifications:

- Finish: White, Black
- Dry Location Rated
- 3-Wire
- Single Circuit
- Voltage: 120V

#### Applications:

- General Track Lighting
- Residential & Multifamily
- Art Galleries, Museums
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality

#### Product Information:

- End cap included with each track
- Extruded aluminum housing
- Solid copper conductor
- Interchangeable beam angles
- Multiple accessories available

#### Mounting & Installations:

- Compatible with H-Type single circuit track system
- Surface Mount Use

#### Certifications:

- ETL Listed for USA and CA

Specs and model numbers are subject to change with or without notice. Customization of product is available.

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | www.envisionledlighting.com

Rev. 10.23



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
TS3-8FT-SM-WH

Line Item#: 84  
[Go to Bill of Materials](#)

Type: TL1

Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Linear Track & Accessories

### 3-Wire Single Circuit

#### TRACK ACCESSORIES

	<b>TS3-SM-LIVE-WH</b> <b>TS3-SM-LIVE-BL</b>	Live End: Required to start a run
	<b>TS3-SM-END-WH</b> <b>TS3-SM-END-BL</b>	End Cap: Required to end a run
	<b>TS3-SM-MJ-WH</b> <b>TS3-SM-MJ-BL</b>	Mini Joiner: Low profile joiner for two straight track sections
	<b>TS3-SM-SC-WH</b> <b>TS3-SM-SC-BL</b>	Straight Connector: Connect two track sections end to end with a center
	<b>TS3-SM-L-WH</b> <b>TS3-SM-L-BL</b>	L-Connector: Connect two track sections at a right angle
	<b>TS3-SM-T-WH</b> <b>TS3-SM-T-BL</b>	T-Connector: Connect two track sections at a T angle
	<b>TS3-SM-X-WH</b> <b>TS3-SM-X-BL</b>	X-Connector: Connect two track sections at an cross angle
	<b>TS3-SM-FLX-WH</b> <b>TS3-SM-FLX-BL</b>	Flexible Connector: Connect two track sections at any angle up to 90°
	<b>TS3-SM-FC-WH</b> <b>TS3-SM-FC-BL</b>	Floating Canopy: Track can be connected to existing outlet box along the track.



Date: 1/12/2026

Project:  
FINDLAY FLATSDescription:  
LED-ATH-10W-5CCT-30D-WHLine Item#: 85  
[Go to Bill of Materials](#)Type: TRACK  
HEAD

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## ARCY-Line: Track Heads

### COB 5-CCT Selectable



#### Track Lights



#### Detail Specifications:

- Finish: White, Black
- Damp Location Rated
- Chip: High Lumen COB, R9 >50, CRI >90
- 2 Step MacAdam Ellipses
- Operating Temperature: -40° - 114° F
- Lens: PMMA Clear Lens
- Average life (L70) of 50,000 hours

#### Applications:

- General Track Lighting
- Residential & Multifamily
- Art Galleries, Museums
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality

#### Product Information:

- Metal housing and trim for better heat dissipation
- 350° Horizontal Rotation, 90° Vertical Rotation
- Interchangeable beam angles
- For use with H-Type track or surface mount installation
- Select-n-Switch Technology: 5-CCT
- Instant-On to full brightness

#### Driver Options:

- Voltage: 120V
- Triac Dimmable Down to 5%
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz
- Built in 2.5Kv Surge Protector
- Flicker Free

#### Mounting & Installation:

- Compatible with H-Type single circuit track system
- Surface mount accessory option available for 3/40 J-Box

#### Certifications:

- ETL Listed for USA and CA
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017
- IC Rated and ASTM-E283 Air-Tight
- Complies with UL 263, ASTM E119, CAN ULC S101

Series	Beam Angles	Finish	Mounting
LED-ATH-10W-5CCT 10W • 1,000lm	30D <sup>1</sup> 30°	WH White	(Blank) H-Type Track
LED-ATH-20W-5CCT 20W • 2,000lm	36D <sup>1</sup> 36°	BLK Black	SM Surface Mount
LED-ATH-30W-5CCT 30W • 3,000lm	24D 24° 60D 60°		
<sup>1</sup> • 30D standard on 10W. • 36D standard on 20W & 30W. • 24D & 60D available for all sizes			

#### Optional Accessories (Order Separately)

Optic Lens	Surface Mount	Emergency Backup <sup>1</sup> (field install)
ATH-10W-24D 24° Beam Angle ATH-10W-60D 60° Beam Angle ATH-20W-24D 24° Beam Angle ATH-20W-60D 60° Beam Angle ATH-30W-24D 24° Beam Angle ATH-30W-60D 60° Beam Angle	ATH-SM Surface Mount for 30/40 Jbox	LED-EMB-15W-HV-0/10V-2P Up to 14W fixtures LED-EMB-25W-HV-0/10V-2P Up to 24W fixtures
		<sup>1</sup> Field installable. Lasts 90 minutes.

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-ATH-10W-5CCT-30D-WH

Line Item#: 85  
[Go to Bill of Materials](#)

Type: TRACK  
HEAD





Powered by 4submit.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## ARCY-Line: Track Heads

### COB 5-CCT Selectable

#### FEATURES

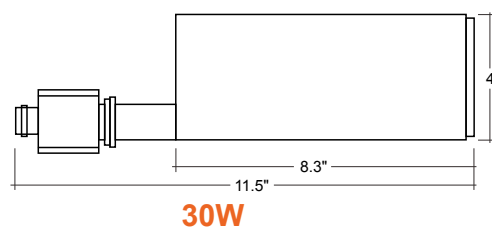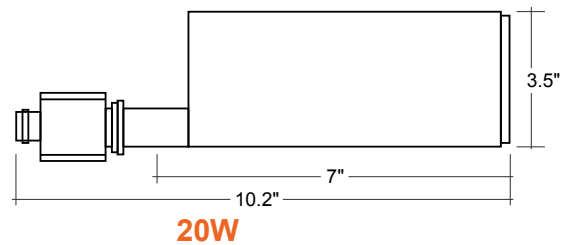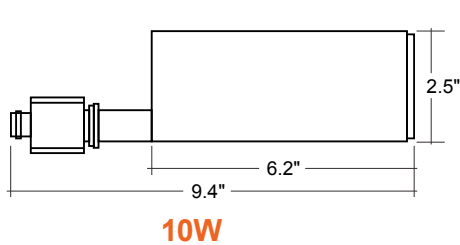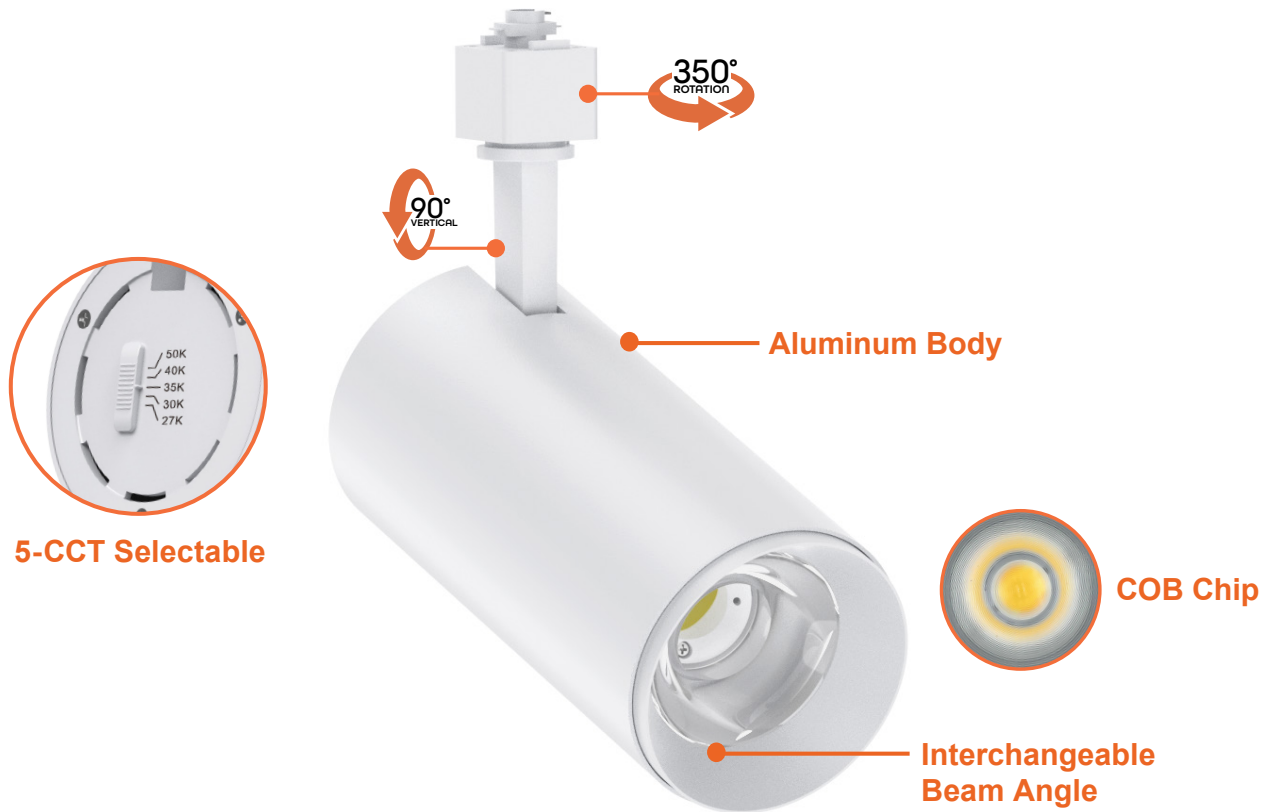

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-ATH-10W-5CCT-30D-WH

Line Item#: 85  
[Go to Bill of Materials](#)

Type: TRACK  
HEAD

Powered by 4submit.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## ARCY-Line: Track Heads

### COB 5-CCT Selectable

#### ACCESSORIES



LENS

ATH-SM

#### QUICK SHIP MODELS

Model	Voltage	Watts	Lumens	Color	CRI
LED-ATH-10W-5CCT-30D-WH	120V	10w	1000	27/30/35/40/50K	>90
LED-ATH-10W-5CCT-30D-BLK	120V	10w	1000	27/30/35/40/50K	>90
LED-ATH-20W-5CCT-36D-WH	120V	20w	2000	27/30/35/40/50K	>90
LED-ATH-20W-5CCT-36D-BLK	120V	20w	2000	27/30/35/40/50K	>90
LED-ATH-30W-5CCT-36D-WH	120V	30w	3000	27/30/35/40/50K	>90
LED-ATH-30W-5CCT-36D-BLK	120V	30w	3000	27/30/35/40/50K	>90

#### OPTIC LENS

Model	Description
ATH-10W-24D	Track Heads: ACRY-Line 24D Optic
ATH-10W-60D	Track Heads: ACRY-Line 60D Optic
ATH-20W-24D	Track Heads: ACRY-Line 24D Optic
ATH-20W-60D	Track Heads: ACRY-Line 60D Optic
ATH-30W-24D	Track Heads: ACRY-Line 24D Optic
ATH-30W-60D	Track Heads: ACRY-Line 60D Optic

#### SURFACE MOUNT

Accessory	Description
ATH-SM	Surface Mount for 30/40 Jbox

#### BATTERY BACK-UP

Accessory	Description
LED-EMB-15W-HV-0/10V-2P	Up to 14W fixtures
LED-EMB-25W-HV-0/10V-2P	Up to 24W fixtures


#### TESTED COMPATIBLE DIMMERS

Other dimmers may be compatible but have not been tested.  
Please contact us for more information.

Lutron	Leviton	Toshiba	Panasonic
DVCL-153P	6674	WDG9001	WN575149
SCL-153P			
LGCL-153P			
MACL-153M			
MSCL-OP153M			
S-600P			
AYCL-153			
DV-600P			

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

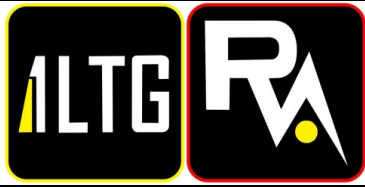

Date: 1/12/2026

Project:  
FINDLAY FLATSDescription:  
LED-CYE-UD-3-3P30-TRI-BL-PCLine Item#: 87  
[Go to Bill of Materials](#)

Type: WM1

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COMProject: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_

Area Lights



## M-Line: 3" Edge-Lit Cylinder Up/Down Light

3-CCT w/ Photocell



WATT	LUMENS
10	1,200
20	2,400
30	3,600

**Detail Specification:**

- Finish: Bronze, Black, White
- IP Rating: Wet Location IP65
- Beam Angle: 60°
- CCT: 30/40/50K Selectable
- Wattage: 30/20/10w
- Lumens: 3,600
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 122° F
- BUG: B2-U2-G2
- Lens: Clear glass with optics
- Average life (L70) of 50,000 hours

**Applications:**

- Dock and Loading
- Walkways & Pathways
- Parking Lots
- Hospitality, Multi-Family
- Outdoor Corridors
- General Outdoor Lighting
- Residential, Commercial and Industrial

**Product Information:**

- Sturdy die-cast aluminum housing finished with corrosion free powder coat
- Photocell included on each fixture. Easy disconnect.
- 1.5' STJW 18.3 AWG cable whip included
- Illuminates up and down and edge
- Select-n-Switch Technology: 3-CCT Selectable + 3-Power Selectable
- Instant-On to full brightness

**Driver Options:**

- UNV: 120-277V 0-10V Dimmable
- Built in 6Kv Surge Protector
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz

**Mounting & Installation:**

- Mounts to 3 or 4" J-box
- Covers a standard 4" recessed j-box

**Certifications:**


- UL Listed for USA and CA
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

**Series****LED-CYE-UD-3-3P30-TRI -**  
3" Up/Down Cylinder • 30/20/10W**Finish****BZ**  
Bronze  
**WH**  
White  
**BL**  
Black**Photocell****PC**  
Photocell  
is included.  
Easy quick  
disconnect.  
(PC-3/4-3PIN-LV)

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 10.23

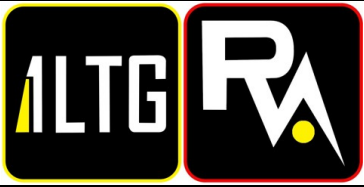

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-CYE-UD-3-3P30-TRI-BL-PC

Line Item#: 87  
[Go to Bill of Materials](#)

Type: WM1

Powered by 4submit.com


**EnVisionLED**<sup>TM</sup>  
WWW.ENVISIONLEDLIGHTING.COM

## M-Line: 3" Edge-Lit Cylinder Up/Down Light 3-CCT w/ Photocell

### FEATURES




### DIMENSIONS

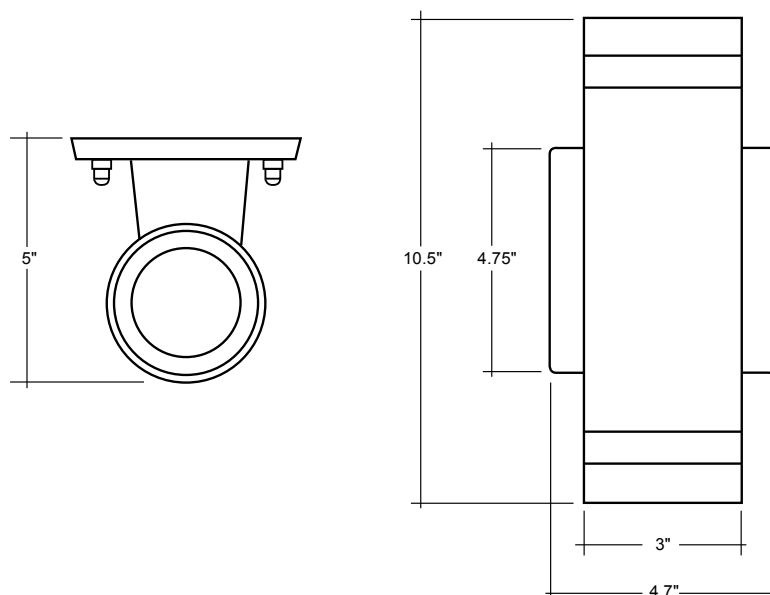

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

	<b>Date:</b> 1/12/2026	<b>Description:</b> SM160116BK	<b>Line Item#:</b> 88 <a href="#">Go to Bill of Materials</a>
	<b>Project:</b> FINDLAY FLATS		<b>Type:</b> WM5
			Powered by 4submittal.com


**Signlite** | SM160116BK

Job Name:
Job Type:
Quantity:
Comments:



### PRODUCT DESCRIPTION

This classic design was originally used to illuminate signs but now is used as a nostalgic wall washer in residential and commercial applications. The polycarbonate shade is supported by an aluminum arm for maximum durability at a very affordable price.



\*height from center of outlet to the top of the fixture

### MEASUREMENTS

DIMENSION	: 7.5" W x 13.75" H x 20.5" Ext
BACK PLATE	: 5" W x 5" H x 2.5" HCO
HANGING WEIGHT	: 1.17 lb
<b>LAMPING</b>	
INPUT VOLTAGE	: 120V
BULB	: 60W Incandescent E26 Medium , 60W Total
BULB INCLUDED	: (Not Included)
DIMMABLE	: Yes
LIGHTING_DIRECTION	: Down

### FINISHES OPTION

- Black (BK)

### MATERIAL

Polycarbonate, Aluminum

### RATINGS

cETLus  
Wet Location



### ADDITIONAL


INSTALL UP/DOWN: Down  
OPERATING TEMPERATURE:  
-20°C (-4°F), 40°C (104°F)

Always consult a qualified electrician before installing any lighting product.

# STUDIO•M

**Modifications or Customizations:** Please email [contract@studiomlighting.com](mailto:contract@studiomlighting.com)  
**Sample Request:** Please email [order@studiomlighting.com](mailto:order@studiomlighting.com) with subject line "Sample Order\_ [Project Name] / [Specifier/Designer]"  
 All samples are subject to Studio M approval and must show proof of project and/or explanation.

Job Name:	Job Type:
Quantity:	Comments:

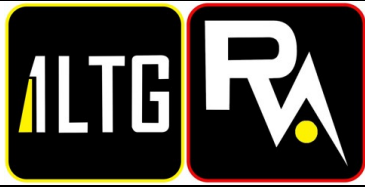

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-FLM-A19-8.5W-30K-D-JA8

Line Item#: 89  
[Go to Bill of Materials](#)


Type: WM5 LAMP

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## A-19 Bulb Filament Series

LED Bulbs

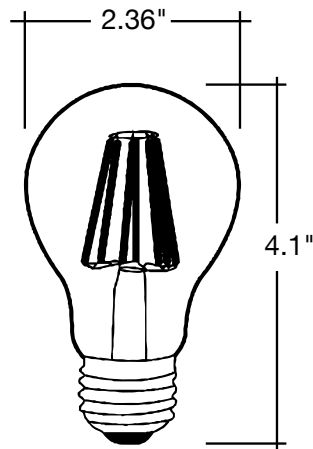

### Detail Specifications

- IP Rating: Damp Location
- Beam Angle: Omni-Directional 360°
- Chip: Filament, R9- 78, CRI >90
- Operating Temperature: -4° - 114° F
- Average life (L70) of 25,000 hours

### Applications:

- Decorative Lighting
- Interior Lighting
- Table & Floor Lamps
- Showcases
- Residential, Multi-Family, Commercial

### Product Information:

- Suitable for use in existing fixtures
- Instant-On to full brightness

### Driver Options:

- 120V
- Triac Dimmable
- PF >0.9, 50/60Hz

### Mounting & Installation:

- E26 Socket
- Direct A Lamp Replacement

### Certifications:

- UL Listed for USA and CA
- Energy Star
- Title 20 and JA8-2022 Approved (8.5W Model Only)
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

### Dimmer List:

Leviton	6674
Lutron	LGCL-153P
Lutron	DVCL-153P
Lutron	CTCL-153P
Lutron	MAELV-300

### Series

**LED-FLM-A19-8.5W-30K-D-JA8**

550 Lumens 60W Equivalent

**LED-FLM-A19-10W-27K**


1,000 Lumens 100W Equivalent

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 10.23

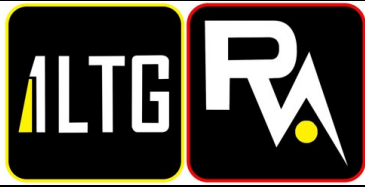

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-VT-ADJ-24-21W-5CCT-BN

Line Item#: 90  
[Go to Bill of Materials](#)


Type: V1

Powered by 4submittal.com

**EnVisionLED**<sup>TM</sup>  
WWW.ENVISIONLEDLIGHTING.COM

## Vanity Fixtures

### Square Adjustable Swivel

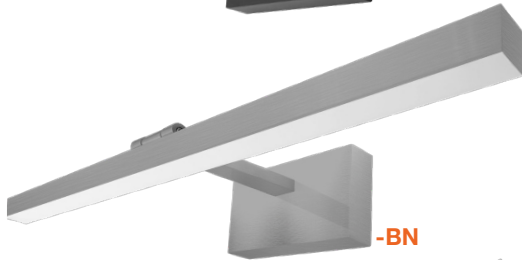

FRONT VIEW



90° Rotatable Angle

Vanity Fixture



#### Detail Specifications:

- Power: 21W
- Lumens: 2,700
- Finishes: Black, Brushed Nickel, Chrome
- IP Rating: IP54 Damp Location
- Beam Angle: 100°
- Chip: SMD 2835, R9 >50, CRI >90
- Operating Temperature: -40° - 114° F
- Lens: Frosted Acrylic, non-yellowing
- Average life (L70) of 50,000 hours

#### Applications:

- Bathrooms & Lavatories
- Hallways & Corridors
- Artwork, Museums
- Residential & Multifamily
- Education, Healthcare, Retail, Hospitality

#### Product Information:

- Available in 23.6" length
- Adjustable Angle: Lens swivels up and down
- Wide j-box for easier installation in retrofit and new construction applications
- Select-n-Switch Technology: 5-CCT Selectable

#### Driver Options:

- Triac & ELV dimmable down to 5%
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz
- Built in 2.5Kv Surge Protector
- Flicker Free

#### Mounting & Installations:

- 30/40 Junction Box
- Surface mount bracket included

#### Certifications:

- ETL Listed for USA and CA
- CA Title 24 JA8-2022 CEC Listed
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

#### Series

LED-VT-ADJ-24-21W-5CCT-BL

Black

LED-VT-ADJ-24-21W-5CCT-BN

Brushed Nickel

LED-VT-ADJ-24-21W-5CCT-CH


Chrome

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 04.25

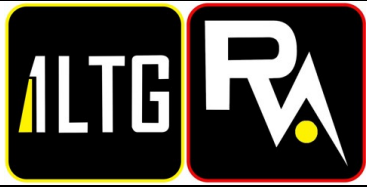

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-VT-ADJ-24-21W-5CCT-BN

Line Item#: 90  
[Go to Bill of Materials](#)

Type: V1

Powered by 4submit.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM


## Vanity Fixtures

### Square Adjustable Swivel

#### FEATURES




90° Rotatable Angle



5-CCT Selectable

#### MEASUREMENTS

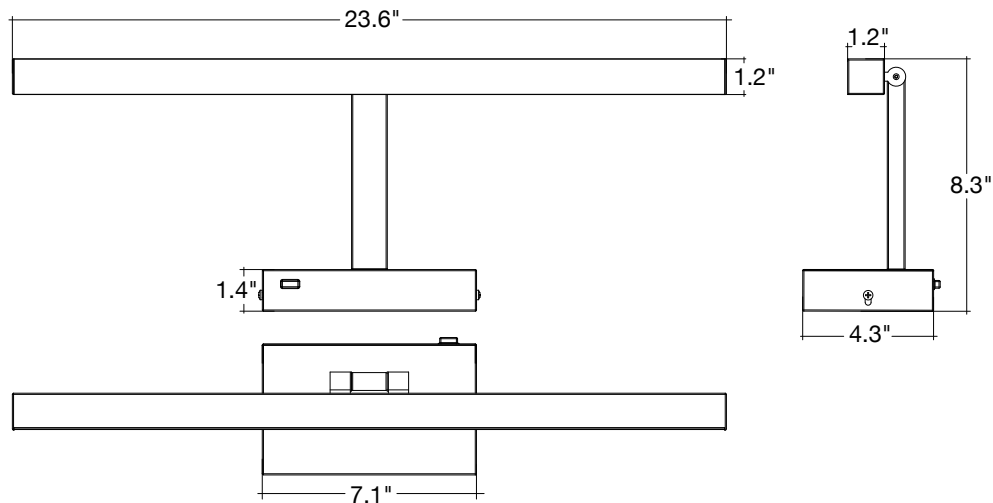

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)





Date: 1/12/2026

Project:  
FINDLAY FLATSDescription:  
LED-RST-4FT-3M40W-4CCT-SRLine Item#: 91  
[Go to Bill of Materials](#)

Type: ST1

Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Round LED Strip Fixtures

### 5-CCT & 3-Power Selectable

### Sensor Ready



3M25W		3M40W		3M60W		3M80W		3M100W	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
15	2,100	20	2,600	40	5,200	50	6,500	70	9,100
20	2,800	30	3,900	50	6,500	65	8,450	85	11,050
25	3,500	40	5,200	60	7,800	80	10,400	100	13,000

Project: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_

Strips



#### Detail Specification:

- Finish: White, Custom finishes available
- IP Rating: Damp Location (IP44)
- Beam Angle: 130°
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 122° F
- Lens: Round Acrylic Frosted Lens
- Average life (L70) of 50,000 hours

#### Applications:

- Stairwell & Hallways
- Utility & Storage
- Garage Structures
- Office and Meeting Rooms
- Shop Lighting
- Commercial and Industrial

#### Product Information:

- Aluminum housing finished with corrosion free power coat
- Easy j-box access: snap on and off tool-less design
- 40 J-box cover included with every fixture
- Audio Jack Sensor Ready (with RST-SR bracket)
- Sensor Options:
  - Standard Sensors
  - SILVAIR Bluetooth Mesh
  - ENVISIONLS Bluetooth
  - [Click Here](#) for More Information

#### Driver Options:

- UNV: 120-277V 0-10V Dimmable
- Optional 347-480V step down transformer available
- THD: <15% (+/-5% tolerance), PF >0.9, 50/60Hz
- 12V low voltage aux output for controls
- Flicker Free

#### Mounting & Installation

- Surface mount into 30 or 40 j-box
- Optional 10' & 20' suspension kit available
- Optional 6' chain mount available
- Rated for installation in closets

#### Certifications

- UL Listed for USA and CA
- DLC Premium Listed
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

Series	Sensor <sup>1</sup>	Emergency <sup>2</sup>	Finish <sup>3</sup>	Flex
LED-RST-2FT-3M25W-5CCT-SR	(Blank)	(Blank)	(Blank)	(Blank)
LED-RST-4FT-3M40W-5CCT-SR	No Sensor	No Emergency	White	No Flex
LED-RST-4FT-3M80W-5CCT-SR	BMS <sup>1</sup>	Backup	BL	6FLX
LED-RST-8FT-3M60W-5CCT-SR	Microwave	EMB	Black	6' Flex
LED-RST-8FT-3M100W-5CCT-SR	Bi-Level Motion	Emergency	GRY <sup>3</sup>	Whip
	+ Daylight Sensor	Backup	Gray	
	(Internal Sensor)	EMB20	BRZ <sup>3</sup>	
	BMSPIR	Emergency	Bronze	
	Available for field install.	Backup (20W)	CS <sup>3</sup>	
			Custom Color	

1. Sensor Note:  
Microwave: Detects motion through barriers such as walls, and doors. Ideal for applications where obstacles might obstruct the line of sight. Works effectively outdoors, in large open spaces, & parking lots. Do not use in areas of high vibrations or metal.  
PIR: Ideal for indoor environments with clear lines of sight to the area of interest. Detects warm objects, like a person or animal. Good for high vibration, areas of metal.

2. Standard emergency is 8W (1,040LM). 20W available, inquire factory

3. Standard quick ship finish is white & black. Other colors are custom finishes.

#### Optional Accessories (Order Separately)

Sensors	Suspension Kit	Accessories	Wire Guards
RST-SR Receptacle for Sensor (Required for below sensors)	SK-10FT-Y-LC-PD 10' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)	RST-SM-CN Surface mount linkable bracket	RST-2FT-WG 2ft Wire Guard
S-AUD-PIR-1 PIR Bi-Level Motion + Daylight Sensor Remote Required: (S-LINE-R)	SK-20FT-Y-LC-PD 20' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)	RST-PDM-CN Pendant mount linkable bracket	RST-4FT-WG 4ft Wire Guard (order 2 for 8ft fixtures)
S-AUD-PIR-BT PIR ENVISIONLS Bluetooth Control			
S-AUD-PIR-SL PIR SILVAIR Bluetooth Mesh			

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 10.25



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-RST-4FT-3M40W-4CCT-SR

Line Item#: 91  
[Go to Bill of Materials](#)

Type: ST1


Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM


## Round LED Strip Fixtures


### 5-CCT & 3-Power Selectable

#### FEATURES

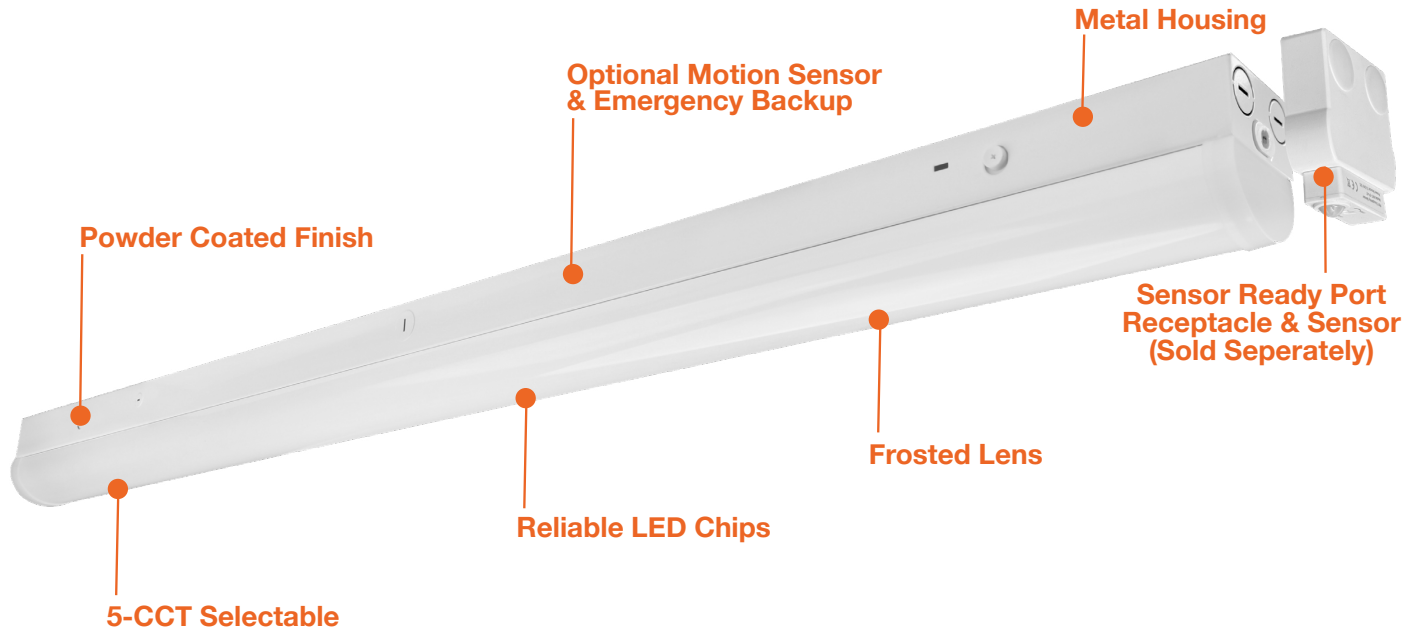

#### DIMENSIONS

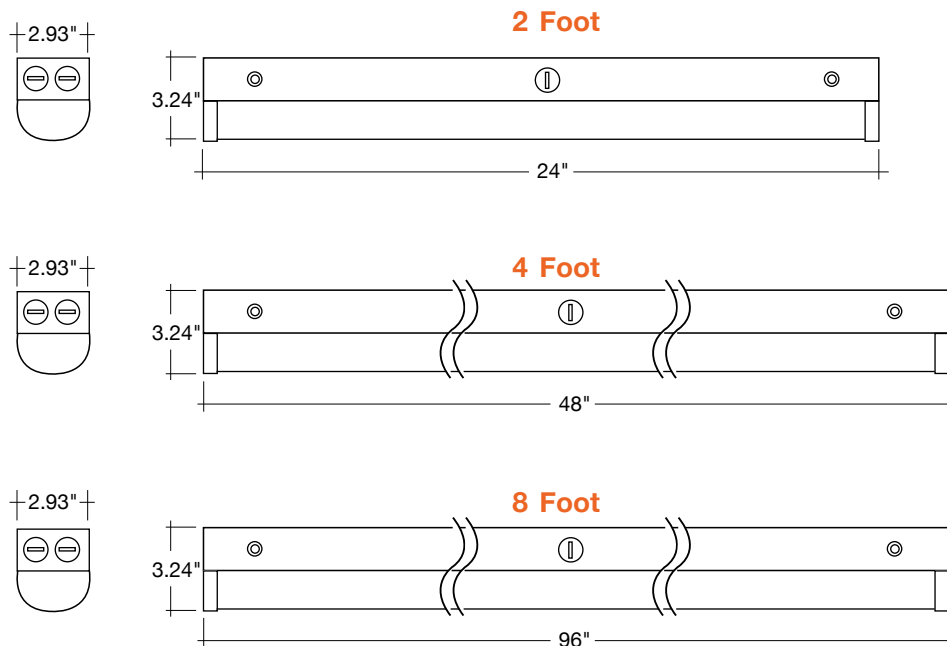

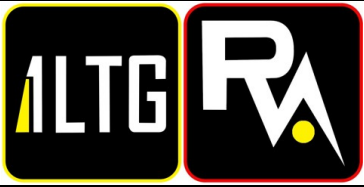

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-RST-4FT-3M40W-4CCT-SR

Line Item#: 91  
[Go to Bill of Materials](#)

Type: ST1

Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Round LED Strip Fixtures G3

### 4-CCT & 3-Power Selectable

#### ACCESSORIES



RST-SR



S-AUD-PIR-1  
S-AUD-PIR-BT  
S-AUD-PIR-SL



SK-10FT-Y-LC-PD  
SK-20FT-Y-LC-PD




RST-SM-CN




RST-PDM-CN




RST-2FT-WG  
RST-4FT-WG

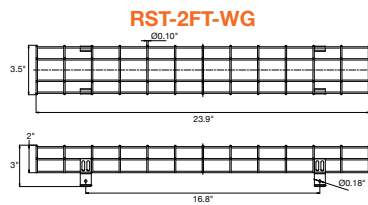

RST-2FT-WG

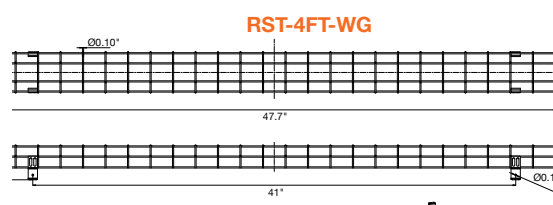

RST-4FT-WG



2-RST-4FT-WG FOR 8FT



Model	Voltage	Watts	Lumens	Color	CRI
LED-RST-2FT-3M25W-5CCT-SR	120-277V	25/20/15w	3,500/2,800/2,100	30/35/40/50/65k	>80
LED-RST-4FT-3M40W-5CCT-SR	120-277V	40/30/20w	5,200/3,900/2,600	30/35/40/50/65k	>80
LED-RST-4FT-3M80W-5CCT-SR	120-277V	80/65/50w	10,400/8,450/6,500	30/35/40/50/65k	>80
LED-RST-8FT-3M60W-5CCT-SR	120-277V	60/50/40w	7,800/6,500/5,200	30/35/40/50/65k	>80
LED-RST-8FT-3M100W-5CCT-SR	120-277V	100/85/70w	13,000/11,050/9,100	30/35/40/50/65k	>80

#### SENSORS

Pre-Installed Accessory Model	Description
RST-SR	Sensor Receptacle (REQUIRED)
S-AUD-PIR-1	PIR Bi-Level + Daylight: Audio Jack
S-AUD-PIR-BT	PIR Bi-Level + Daylight: Audio Jack Bluetooth EnVisionLS App
S-AUD-PIR-SL	PIR Bi-Level + Daylight: Audio Jack SILVAIR

#### SUSPENSION KIT


Model	Description
SK-10FT-Y-LC-PD	10' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)
SK-20FT-Y-LC-PD	20' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)

#### ACCESSORIES

Model	Description
RST-SM-CN	Surface Mount Linkable Bracket
RST-PDM-CN	Pendant Mount Linkable Bracket

#### WIRE GUARDS

Model	Description
RST-2FT-WG	2ft Wire Guard
RST-4FT-WG	4ft Wire Guard (order 2 for 8ft fixtures)

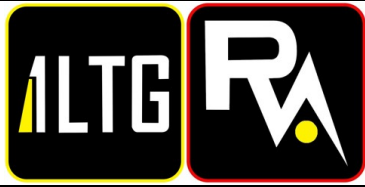

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-RST-4FT-3M40W-4CCT-SR









Line Item#: 91  
[Go to Bill of Materials](#)

Type: ST1


Powered by 4submittal.com

## EnVisionLED™ Control Options

EnVision LED offers 3 control systems compatible with our LED Fixtures for projects of all sizes and budgets.

	Basic Controls	EnVisionLS 	EnVisionLED™ x SILVAIR 
<b>Description</b>	Standard Plug In Sensors	Basic Bluetooth Wireless Control	Advanced Bluetooth Wireless Control
<b>Recommended Quantity</b> (but not limited to)	N/A	>40-50 Nodes	>50 Nodes
<b>Maximum Zone Quantity</b>	N/A	100	3,000
<b>Commissioning Tool</b>	Remote Only	  ENVISIONLS App 	  SILVAIR App 
<b>Commissioning Process</b>	Individually Set via Remote	Wireless Must be done on site	Wireless- Initial linking must be done on site. Commissioning can be done via desktop remotely.
<b>Floor Plan Upload</b>	N/A	N/A	Yes Add a floor plan and mark luminaires & zones via desktop
<b>Gateway</b>	N/A	N/A	Required only for energy monitoring, advanced scheduling, automated demand response.
<b>Individual Luminaire Control</b>	Yes	Yes	Yes
<b>Luminaire Grouping Zoning</b>	N/A	Yes	Yes
<b>High End Power Low End Power</b>	Yes but limited (View Remote)	Yes	Yes
<b>Cost</b>	\$	\$\$	\$\$\$
<b>DLC NLC Listed</b>	N/A	Yes	Yes
<b>Energy Monitoring &amp; Data Reporting</b>	N/A	N/A	Monitor energy usage per individual zone & retrofit cost savings calculation + detailed reporting



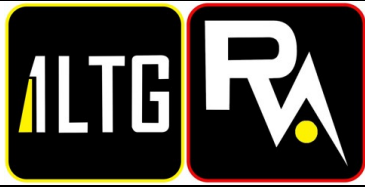

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-RST-4FT-3M40W-4CCT-SR

Line Item#: 91  
[Go to Bill of Materials](#)

Type: ST1

Powered by 4submittal.com





## Compatible Products:

EnVision offers a variety of nodes, sensors, & gateways that are controlled via remote, ENVISIONLS Bluetooth Mesh & SILVAIR Bluetooth Mesh on all of our 0-10V dimmable fixtures.






### Individual Fixture Controls: PIR Sensor, Bi-Level Dimming, Daylight


Basic Note: -1 • ENVISIONLS Models Note: -BT • SILVAIR Models Note: -SL


	MODEL #	DESIGN	RECOMMENDED FIXTURE	FEATURES
	S-TWC-PIR-1 S-TWC-PIR-BT S-TWC-PIR-SL	Twist-C Control Sensor	Sensor Ready Fixtures: Area Lights, Canopies, Flood Lights, High Bays	All models are equipped with PIR occupancy sensing, high & low end bi-level dimming, & daylight sensing.
	S-TWC-90 + S-TWC-PIR-1 S-TWC-90 + S-TWC-PIR-BT S-TWC-90 + S-TWC-PIR-SL	Twist-C Control Sensor + 90 Degree Arm	Cylinders, Strips, Wall Packs	
	S-AUD-PIR-1 S-AUD-PIR-BT S-AUD-PIR-SL	2.5m Audio Jack	Panels & Troffers	
	S-SN-PIR-1 S-SN-PIR-BT S-SN-PIR-SL	Snap In Sensor	Troffers & Wraps	

### Group Controls ENVISIONLS Models Note : -BT • SILVAIR Models Note: -SL

	MODEL #	DESIGN	VOLTAGE	FEATURES	RECOMMENDED FEATURES
	S-CM-PIR-LV-BT S-CM-PIR-LV-SL	Ceiling Mounted PIR Sensor	12-24V	PIR Sensor, Bi-Level Dimming, Daylight, 360° detection, 12' Max Mounting Height	Connects to 0-10V dimmable fixtures
	S-WM-PIR-CUNV-BT S-WM-PIR-CUNV-SL	Wall Mounted PIR Occupancy Sensor, Bi-Level Dimming, Daylight	120-277V	On/Off PIR occupancy sensor, 180° detection, 30' detection @ 4' Mounting Height	Connects to LED fixtures
	S-WS-120V-USB-SL		120V	Dimming Wall Socket, Two Sockets	Floor Lamps, Other Lamps

### Gateway (Silvaire Only) 4.5–5.5 V DC, 2A Power over Ethernet 36–57 V DC

	MODEL #	DESIGN	VOLTAGE	FEATURES	RECOMMENDED FEATURES
	SGW-102	Wall or Ceiling Mounted	POE	Advanced Energy Monitoring Control	Connects to Silvaire Controls. Gateway is not required.

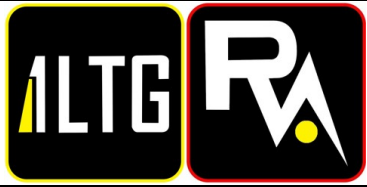

Date: 1/12/2026

Project:  
FINDLAY FLATS


Description:  
CFR525J1-N10-WP-1-FM

Line Item#: 93  
[Go to Bill of Materials](#)

Type: F2

Powered by 4submittal.com

**CARRO**  
SMART FANS | LIGHTING

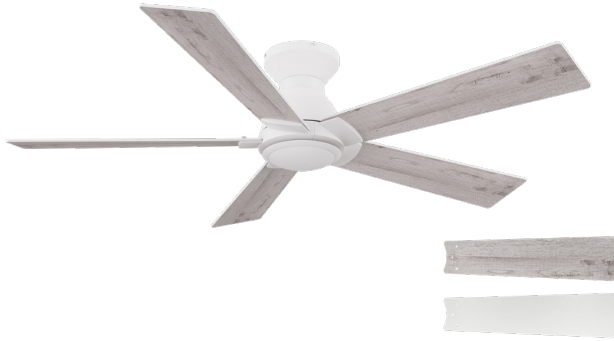

#### DC Motor

- 10-Speed | Reversible
- Motor | 148 X 15mm
- RPM: High 205 Low 65
- 4630 CFM | 26 W | Efficiency = 174 CFM / Watt

#### Blade

- 5-Blade | 52" Sweep
- Material: Highly-Compressed Plywood
- 11° Pitch

#### Light Kit

- No Light
- Metal Plate

#### Control

- Remote (Standard)
- Wall Control (Optional\*)
- Pull Chain (Optional\*)

#### Location

- Indoor / Outdoor (Damp Rated)

#### Certification

- ETL Listed

#### Warranty

- Fan Motor: Three-Year Limited Warranty
- Fan Blade: Three-Year Limited Warranty
- Other: Three-Year Limited Warranty

#### Measurements

- Dimensions (in.):  
10.8 H (to lowest point) x 7 W (housing) x 7.2 H (top of blade)
- Product Weight (lbs.): 11.2 N.W. | 15 G.W.
- Box (in.): 23 L X 11 W X 10 H

#### Shipping

- Container Loading:  
20GP 680 pcs | 40GP 1400 pcs | 40HQ 1640 pcs

#### SKU #

CFR525J1-N10-WP-1-FM

#### Motor/Blade Finish

White | White & Whitewashed  
Reversible Plywood Blades

## LURGAN

5-Blade | 52 " | Flushmount | Remote Control  
DC MOTOR 120V  
NO LIGHT



Intertek


Fan Motor

Fan Blade

Other

#### Dimensions


10.8"	7"	7.2"
Height (lowest point)	Width (housing)	Height (top of blade)

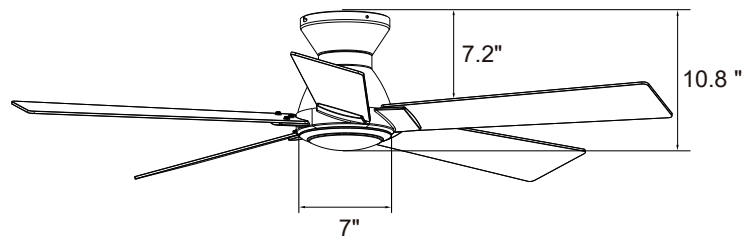


#### Fan Control Features and Options

- Simple and intuitive design with standard layout.
- Multi-functional fan speed control with fan forward/reverse, and fan on/off.
- Remote (Standard)
- Hardwired Wall Control (Optional\*)
  - Single Live Wire No Neutral Needed
  - Push Button or Knob design available
- Pull Chain (Optional\*)

\* Optional controls at an additional cost

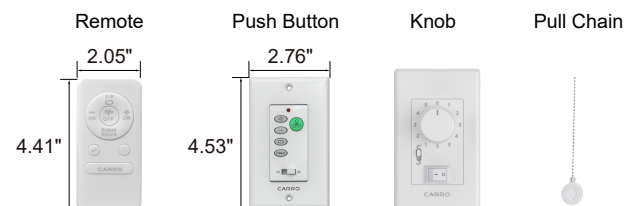

\* Data subject to change without notice.

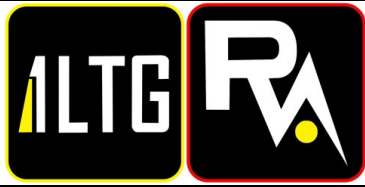

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-DH-HO

Line Item#: 94  
[Go to Bill of Materials](#)

Type: EM

Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Emergency Bug Eyes Square Models



Emergency



### Detail Specifications:

- Finish: White
- IP Rating: Dry Location
- Lumen Options
  - Standard: 3W 140LM
  - High Output: 6W 650LM
- Operating Temperature: -40° - 104° F
- Average life (L70) of 50,000 hours

### Applications:

- Exit Doors
- Corridor Intersections
- Exit Stairways
- Exit ramps

### Product Information:

- Built-in test switch and charge indicator light
- Overcharge and over-discharge protection
- Injection-molded thermoplastic housing, PC cover
- Backup Time: >90 minutes
- Recharge time: 24 hours

### Driver Options:

- Dual Voltage 120/277V
- PF >0.9, 50/60Hz
- Nickel Cadmium Battery 3.6V
- This fixture is non-dimmable

### Mounting & Installation:

- Wall and ceiling mounted
- Universal J-box mounting pattern

### Certifications:

- UL Listed for USA and CA (UL94V-0 Flame Rating)
- Meets UL924, NDPA 101
- Approved for CA T24
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

Series

**LED-EM-DH**

3W • 140Lm

**LED-EM-DH-HO**

6W • 650Lm

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 01.24





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-DH-HO

Line Item#: 94  
[Go to Bill of Materials](#)


Type: EM

Powered by 4submittal.com


**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Emergency Bug Eyes Square Models

### FEATURES

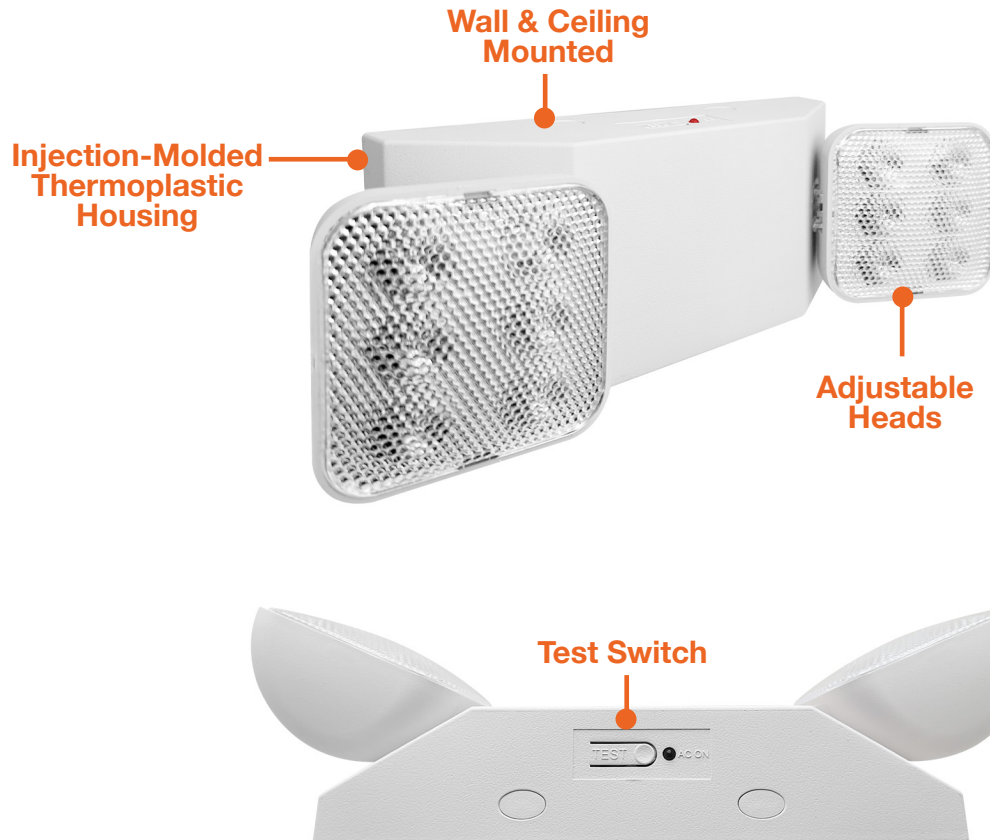


### DIMENSIONS

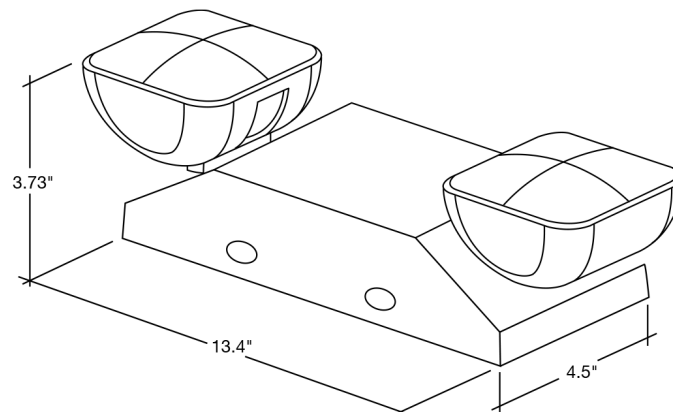

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

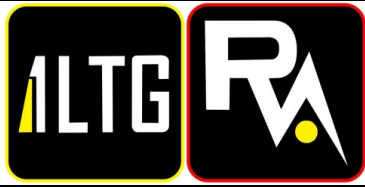

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-EXT-RG-WH-CMB-RC

Line Item#: 95  
[Go to Bill of Materials](#)

Type: EX/EM

Powered by 4submittal.com

**EnVisionLED**<sup>TM</sup>  
WWW.ENVISIONLEDLIGHTING.COM

## Emergency Exit Sign With Bug Eyes



Emergency Exit Signs



### Detail Specifications:

- Finish: White Finish
- IP Rating: IP20, Dry Location
- Wattage: 3.5W
- Lumens: 140
- Operating Temperature: 32°F to 104°F
- Lens: Red or Green
- Remoted Capable
- Compatible with: LED-EM-RC-1, LED-EM-RC-2
- Average life (L70) of 50,000 hours

### Applications:

- Exit Doors
- Corridor Intersections
- Exit Stairways
- Exit Ramps

### Product Information:

- Built-in test switch and charge indicator
- Injection-molded thermoplastic housing, PC cover
- Backup Time: >90 minutes
- Recharge time: 24 hours
- Single Face
- 6" height letters with 3/4" stroke, viewable from 100ft away

### Driver Options:

- Dual Voltage 120/277V
- PF >0.9, 50/60Hz

### Mounting & Installations:

- Wall and ceiling mounted
- Universal J-box mounting pattern

### Certifications:

- UL Listed for USA and CA (UL94V-0 Flame Rating)
- Meets UL924, NDPA 101
- Approved for CA T24
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

### REMOTE HEAD OPTIONS

LED-EM-RC-1

LED-EM-RC-2

Series

**LED-EM-EXT-RG-WH-CMB-RC**


Red/Green Color Selectable

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 08.25

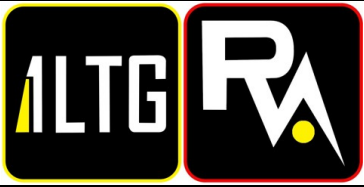

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-EXT-RG-WH-CMB-RC

Line Item#: 95  
[Go to Bill of Materials](#)

Type: EX/EM

Powered by 4submit.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## Emergency Exit Sign With Bug Eyes

### FEATURES

Film Protectant

Fire-Retardant




Adjustable Knuckle

Super Bright COB LED

Wall & Ceiling Mount


### DIMENSIONS

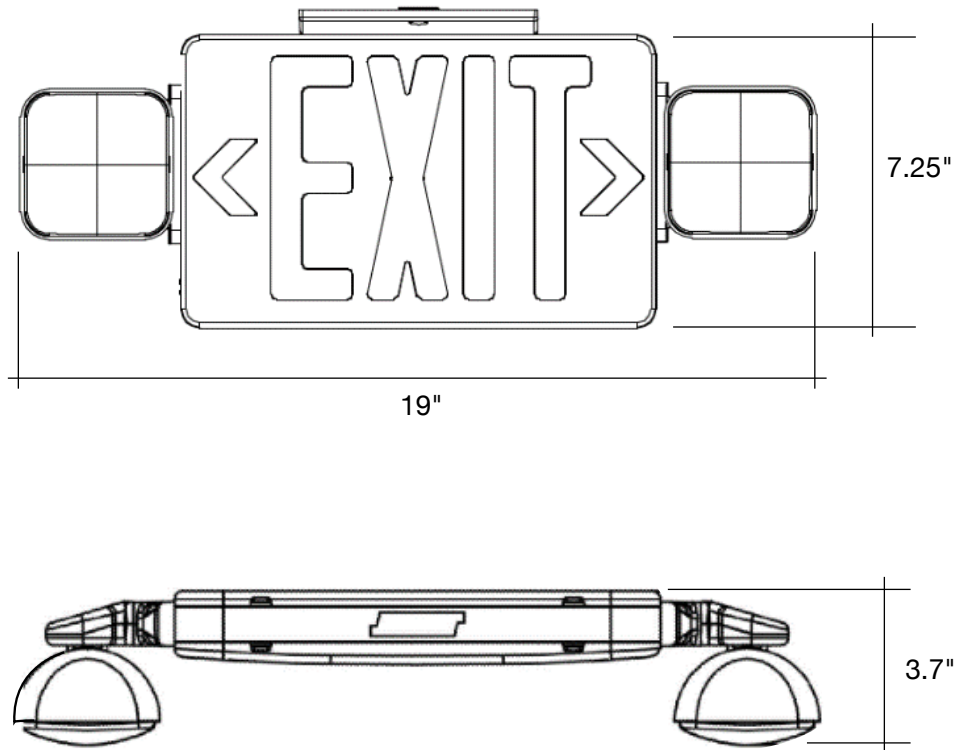

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

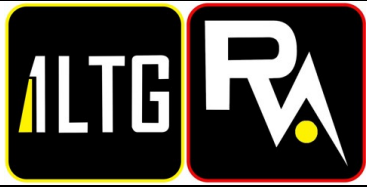

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-RC-1

Line Item#: 96  
[Go to Bill of Materials](#)

Type: RH1

Powered by 4submittal.com



Project: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_



## Single/Double Remote Head

### Product Information:

- Injection-Molded Thermoplastic ABS Housing
- 320 Lumens
- UL-940V-0 Flame Rating
- Wall and Ceiling Mounting
- Input Voltage: 3.6-24 VDC
- Super Bright SMD LED 2.4W
- IP Class: IP65
- Insulation: Class II
- Operating Temperature: 0°F ~ 104° F
- Remote Capable
- Compatible with but Not Limited to  
LED-EM-EXT-G-WH-CMB-RC  
or LED-EM-EXT-R-WH-CMB-R
- 5 Year Limited Warranty



#### 1 Product

LED-EM-RC Remote Head


#### 2 Head


Single 1  
Double 2

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)



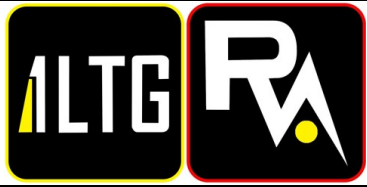

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-RC-1

Line Item#: 96  
[Go to Bill of Materials](#)

Type: RH1

Powered by 4submittal.com




## Single/Double Remote Head

### FEATURES



### FEATURES

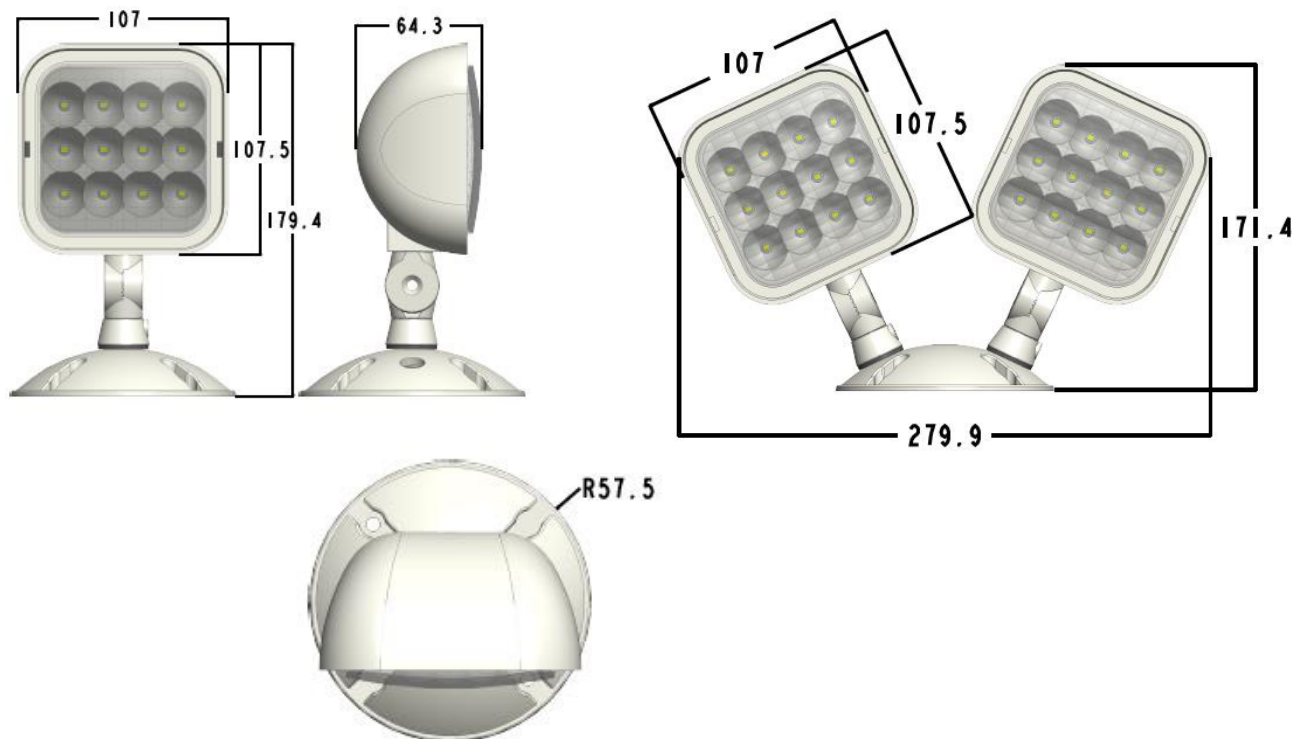

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)







Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 97  
[Go to Bill of Materials](#)

Type: SM1

Powered by 4submittal.com




LIGHTING | REINVENTED

plano **ARCH** PRO

## LDLL | Eclipse-II

Product Data Sheet

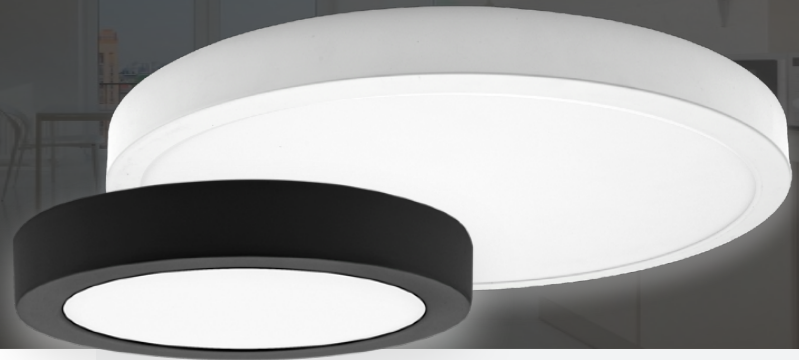

COMMERCIAL-GRADE

### LED Surface Mount Puck Downlight



CCTselect



TruColor Rendering

5" / 7" / 9" / 11" / 13"

#### Product Overview

**INTENDED USE** — The Eclipse-II Series is built for 5-way switchable CCT and is suitable for use in dry, damp, and wet locations, perfect for use in kitchens, hallways, stairways, bathrooms, closets, and just about anywhere you'd need it.

**CONSTRUCTION** — The die-cast aluminum housing is designed for durability and ruggedness.

**INSTALLATION** — Quick-mount aluminum backplate for easy installation.

**WARRANTY** — Featuring a no-compromise 5-year warranty, Energy Star and JA8-compliant, the Eclipse-II is a clean and modern solution for surface mounted driverless design.

ARCHIPELAGO luminaires and LED components undergo rigorous testing by an independent laboratory to meet IESNA LM-79 and LM-80 standards for light output and lumen maintenance. LED color temperature is warranted to shift no more than 180K over the standard warranty period. Correlated Color Temperature (CCT) follows the guidelines set forth in the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

#### Applications



Residential



Hallway



Patio



Entryway

#### Main Features

- Low-Profile Edge-Lit Surface Mount Design
- Durable Di-Cast Aluminum Trim w/ Frosted Lens
- For New Construction or Retrofit Applications
- Suitable for Use in Dry, Damp and Wet Locations
- Suitable for Use in Closets, In Accordance to NEC Guidelines
- Installs on Ceiling and Standard Junction Boxes
- Dimmable to 10% on Compatible TRIAC Dimmers
- 5-Year, 50,000 Hr Warranty
- CEC T24 JA8 Compliant
- NEC Compliant, Suitable for Use in Closet
- Energy Star Certified for 5", 7", 9"

#### Product Warranty\*

5-Year Warranty



50,000 Hrs



\* Standard warranty. Extended warranty available.

Archipelago Lighting, Inc.


| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

[Contact Us](#)





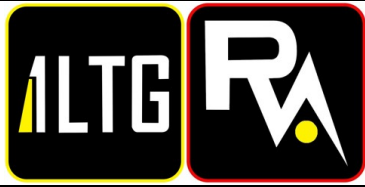

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W


Line Item#: 97  
[Go to Bill of Materials](#)

Type: SM1

Powered by 4submittal.com



LDLL | Eclipse-II

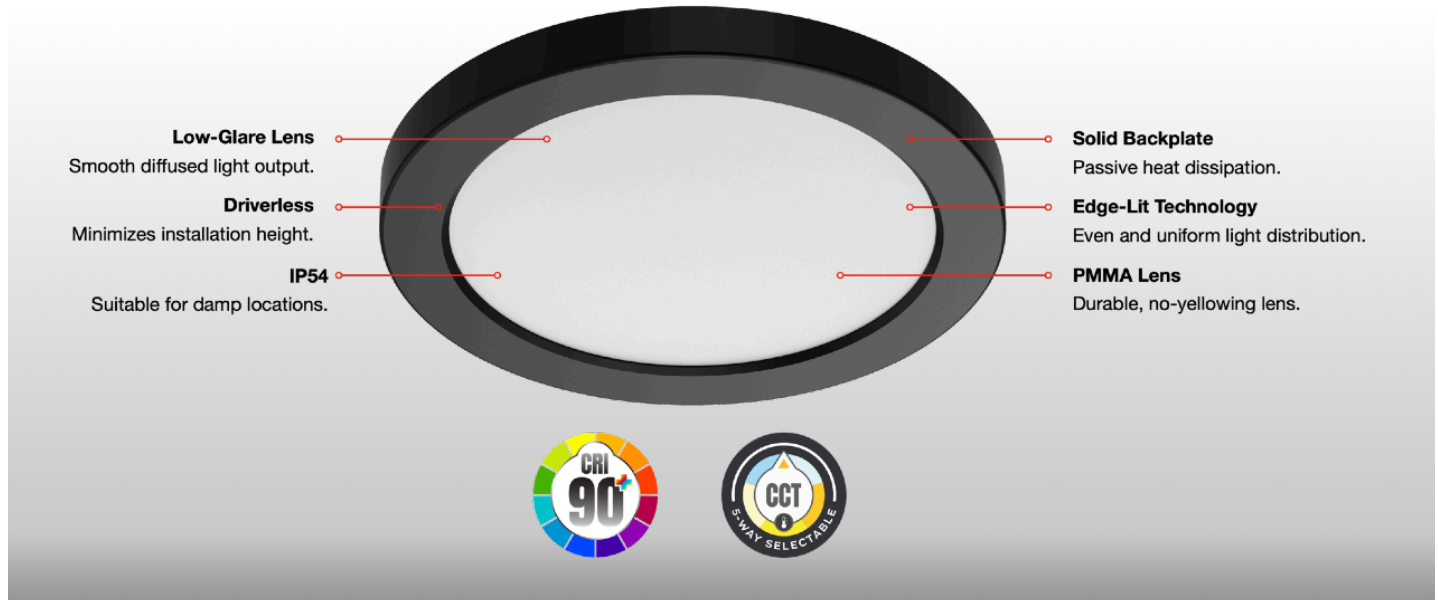

#### Ordering Guide<sup>1</sup>

Model Series	Size (in) / Wattage (W)	Series	CCTselect (K)	Finish Color
<b>LDLL</b> LED Surface Mount Puck Downlight	<b>0510</b> 5inch / 10W <b>0715</b> 7inch / 15W <b>0918</b> 9inch / 18W <b>1121</b> 11inch / 21W <b>1324</b> 13inch / 24W	- <b>E2</b> Eclipse-II	<b>S5</b> 5-CCTselect: 2700K 3000K 3500K 4000K 5000K	/ <b>B</b> Black <b>W</b> White
<b>CATALOG #:</b>				
<b>LDLL</b>		- <b>E2</b>	<b>S5</b>	/

#### Options Guide<sup>2</sup>

EM Driver <sup>3</sup>	Motion Sensor
<input type="checkbox"/> <b>EM15</b> 15W EM Driver <input type="checkbox"/> <b>CRCU</b> 15W EM Driver with Junction Box	<input type="checkbox"/> <b>MSP/W</b> PIR Bi-Level Sensor for 7" and 9" ONLY (White Finish)
<b>OPTIONAL ACCESSORIES #:</b>	

**NOTE:**

- Only one selection may be applicable within the same category.
- Multiple selections may be applicable within the same option category. See Compatible Accessories below for details.
- EM drivers only work with 7, 9, 11 and 13in fixtures

#### Archipelago Lighting, Inc.


| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

#### Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)






+1 (866) 912-3220

	Date: 1/12/2026	Description: LDLL0510-E2S5/W	Line Item#: 97
	Project: FINDLAY FLATS		<a href="#">Go to Bill of Materials</a>
			Type: SM1
Powered by 4submittal.com			



LDLL | Eclipse-II

Sizing & Measurements

Model Series	Dimensions	Overall Diameter (in)	Depth (IN)
LDLL0510-E2		5.51	0.79
LDLL0715-E2		7.48	0.82
LDLL0918-E2		8.86	0.79
LDLL1121-E2		10.98	0.98
LDLL1124-E2		12.80	0.98

Recommended Dimmers

Make	Models			
Lutron	TG-600PR-WH S-600PR-WH CTCL-153PDH-WH	TGCL-153PH-LA SLV-600P-AL DV-600PR-WH	SCL-153PH-WH GT-600P DVCL-153P	MSCL-OP153M MACL-153M//MA-R PD-6WCL
Leviton	6672 IPL06	6674	DSL06	RNL06

Accessories (Standard)

Accessories (Optional)



<b>Mounting Bracket</b>	<b>Wire Nuts</b>	<b>Bolts</b>	<b>15W EM Driver</b>	<b>PIR Bi-Level Sensor</b>
Compatible to 2.75" or 3.50" Junction Box			EM15-HMB/170DC CRCU-EM/JBM	LDLL-E2/MSP/W

Archipelago Lighting, Inc.


| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220

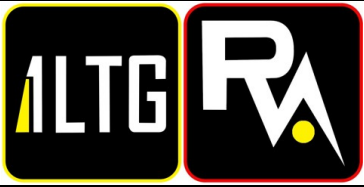

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 97  
[Go to Bill of Materials](#)


Type: SM1


Powered by 4submittal.com



LDLL | Eclipse-II

EM Driver / J-Box (Optional)

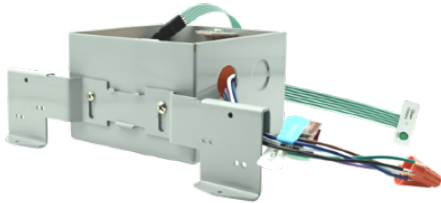

Technical Specification	CRCU-EM/JBM
Emergency Power	15W Max
Installation Method	Recessed
IP Rating	IP20
CEC T.24/JA8 Compliant	Yes
Color Finish	Grey
Physical Features	<ul style="list-style-type: none"><li>Directly connect to AC input</li><li>Fits 2.75" and 3.5" J-Box</li><li>Supports recessed in-ceiling mount</li></ul>
Self-Diagnostic Test Switch	<ol style="list-style-type: none"><li>Emergency conversion kit will go into emergency mode when test switch is pressed while main power is ON.</li><li>Will go into charging mode if test switch is not pressed.</li><li>In emergency mode, pressing the test switch for 3-seconds will inactivate emergency mode.</li></ol>
Indicator Status Light	<ol style="list-style-type: none"><li>Green ON: Charging mode / charging full</li><li>Green OFF: Mains power OFF / discharging mode</li></ol>
Dimension	<p>W4.29in x H2.96</p> 

Archipelago Lighting, Inc.


| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220

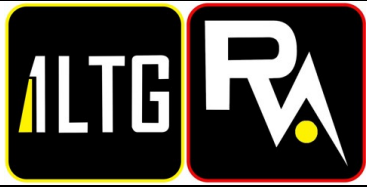

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 98  
[Go to Bill of Materials](#)

Type: SM2

Powered by 4submittal.com




LIGHTING | REINVENTED

plano **ARCH** PRO

## LDLL | Eclipse-II

Product Data Sheet

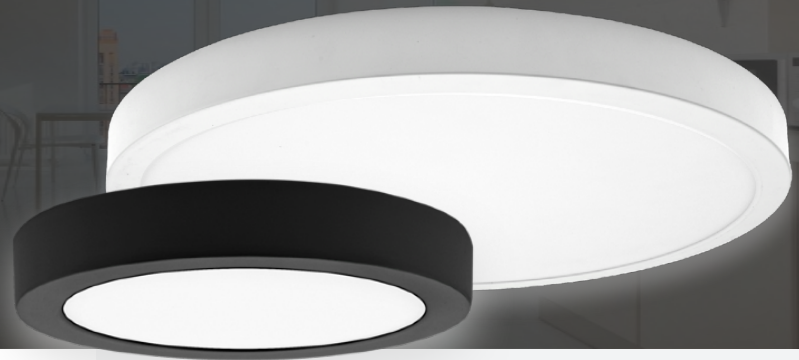

COMMERCIAL-GRADE

### LED Surface Mount Puck Downlight



CCTselect



TruColor Rendering

5" / 7" / 9" / 11" / 13"

#### Product Overview

**INTENDED USE** — The Eclipse-II Series is built for 5-way switchable CCT and is suitable for use in dry, damp, and wet locations, perfect for use in kitchens, hallways, stairways, bathrooms, closets, and just about anywhere you'd need it.

**CONSTRUCTION** — The die-cast aluminum housing is designed for durability and ruggedness.

**INSTALLATION** — Quick-mount aluminum backplate for easy installation.

**WARRANTY** — Featuring a no-compromise 5-year warranty, Energy Star and JA8-compliant, the Eclipse-II is a clean and modern solution for surface mounted driverless design.

ARCHIPELAGO luminaires and LED components undergo rigorous testing by an independent laboratory to meet IESNA LM-79 and LM-80 standards for light output and lumen maintenance. LED color temperature is warranted to shift no more than 180K over the standard warranty period. Correlated Color Temperature (CCT) follows the guidelines set forth in the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

#### Applications



Residential



Hallway



Patio



Entryway

#### Main Features

- Low-Profile Edge-Lit Surface Mount Design
- Durable Di-Cast Aluminum Trim w/ Frosted Lens
- For New Construction or Retrofit Applications
- Suitable for Use in Dry, Damp and Wet Locations
- Suitable for Use in Closets, In Accordance to NEC Guidelines
- Installs on Ceiling and Standard Junction Boxes
- Dimmable to 10% on Compatible TRIAC Dimmers
- 5-Year, 50,000 Hr Warranty
- CEC T24 JA8 Compliant
- NEC Compliant, Suitable for Use in Closet
- Energy Star Certified for 5", 7", 9"

#### Product Warranty\*

5-Year Warranty



50,000 Hrs



\* Standard warranty. Extended warranty available.

Archipelago Lighting, Inc.


| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

[Contact Us](#)



LDLL | Eclipse-II



Project Details





Project Name:

Fixture Schedule:

Project Number:

Notes:

Highlights

Features	Description
5-CCTselect	 CCT selectable: 5-way dip-switch
Sensor Ready	 Optional plug-n-play motion sensor available on 7" and 9"
TruColor High CRI	 Title 24 Compliant. JA8 LED 90CRI+
Limited Warranty	 5-Year Warranty

Key Specifications

- Input Voltage: 120V
- Dimming: TRIAC
- Efficacy: ≤103lm/W
- IP: Suitable for Wet Location
- Housing: Die-Cast Aluminum
- Power Factor (PF): >0.9 Non-Flicker
- Operating Temperature: -4°F - 113°F
- Total Harmonic Distortion (THD): <20%
- Beam Angle (°): 120°

Certifications



Model Specifications

Model	Size (in)	Wattage (W)	Lumen (lm)	Efficacy (lm/W)	5-CCTselect (K) <sup>1</sup>	Voltage (V)	CRI
LDLL0510	5"	10W	671lm	67lm/W	2700K	120V	90CRI+
			675lm	68lm/W	3000K		
			698lm	70lm/W	3500K		
			712lm	71lm/W	4000K		
			689lm	69lm/W	5000K		
LDLL0715	7"	15W	1,187lm	79lm/W	2700K		
			1,205lm	80lm/W	3000K		
			1,211lm	81lm/W	3500K		
			1,257lm	84lm/W	4000K		
			1,241lm	83lm/W	5000K		
LDLL0918	9"	18W	1,409lm	78lm/W	2700K		
			1,415lm	79lm/W	3000K		
			1,436lm	80lm/W	3500K		
			1,460lm	81lm/W	4000K		
			1,442lm	80lm/W	5000K		
LDLL1121	11"	21W	2,022lm	96lm/W	2700K		
			2,035lm	97lm/W	3000K		
			2,054lm	98lm/W	3500K		
			2,165lm	103lm/W	4000K		
			2,159lm	103lm/W	5000K		
LDLL1324	13"	24W	2,393lm	100lm/W	2700K		
			2,407lm	100lm/W	3000K		
			2,450lm	102lm/W	3500K		
			2,455lm	102lm/W	4000K		
			2,446lm	102lm/W	5000K		


1. Default settings on CCTselect is highest CCT available.

Archipelago Lighting, Inc.

Headquarter: 4615 State Street, Montclair, CA 91763  
USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

www.archipelagolighting.com  
+1 (866) 912-3220

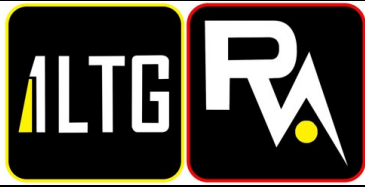

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W


Line Item#: 98  
[Go to Bill of Materials](#)

Type: SM2

Powered by 4submittal.com



LDLL | Eclipse-II

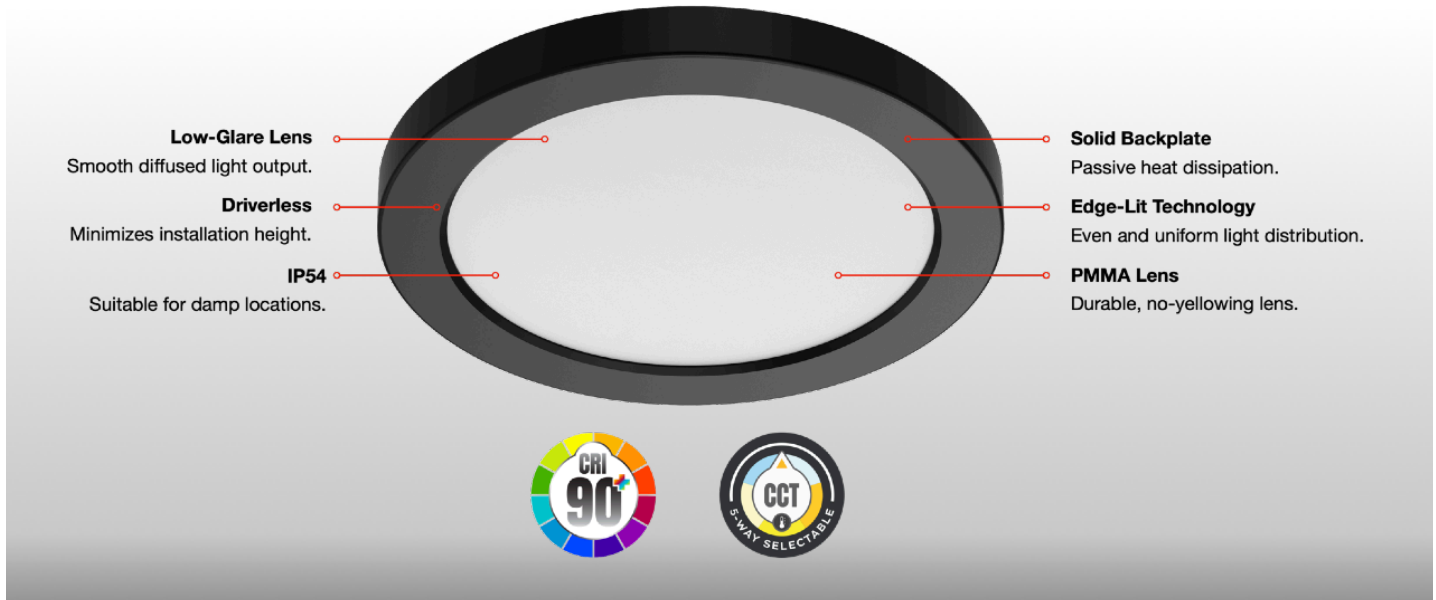

#### Ordering Guide<sup>1</sup>

Model Series	Size (in) / Wattage (W)	Series	CCTselect (K)	Finish Color
<b>LDLL</b> LED Surface Mount Puck Downlight	<b>0510</b> 5inch / 10W <b>0715</b> 7inch / 15W <b>0918</b> 9inch / 18W <b>1121</b> 11inch / 21W <b>1324</b> 13inch / 24W	- <b>E2</b> Eclipse-II	<b>S5</b> 5-CCTselect: 2700K 3000K 3500K 4000K 5000K	/ <b>B</b> Black <b>W</b> White
<b>CATALOG #:</b>				
<b>LDLL</b>		- <b>E2</b>	<b>S5</b>	/

#### Options Guide<sup>2</sup>

EM Driver <sup>3</sup>	Motion Sensor
<input type="checkbox"/> <b>EM15</b> 15W EM Driver <input type="checkbox"/> <b>CRCU</b> 15W EM Driver with Junction Box	<input type="checkbox"/> <b>MSP/W</b> PIR Bi-Level Sensor for 7" and 9" ONLY (White Finish)
<b>OPTIONAL ACCESSORIES #:</b>	

NOTE:

- Only one selection may be applicable within the same category.
- Multiple selections may be applicable within the same option category. See Compatible Accessories below for details.
- EM drivers only work with 7, 9, 11 and 13in fixtures

#### Archipelago Lighting, Inc.


| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

#### Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)






+1 (866) 912-3220

	Date: 1/12/2026	Description: LDLL0510-E2S5/W	Line Item#: 98
	Project: FINDLAY FLATS		<a href="#">Go to Bill of Materials</a>
			Type: SM2
Powered by 4submittal.com			



LDLL | Eclipse-II

Sizing & Measurements


Model Series	Dimensions	Overall Diameter (in)	Depth (IN)
LDLL0510-E2		5.51	0.79
LDLL0715-E2		7.48	0.82
LDLL0918-E2		8.86	0.79
LDLL1121-E2		10.98	0.98
LDLL1124-E2		12.80	0.98

Recommended Dimmers

Make	Models			
Lutron	TG-600PR-WH S-600PR-WH CTCL-153PDH-WH	TGCL-153PH-LA SLV-600P-AL DV-600PR-WH	SCL-153PH-WH GT-600P DVCL-153P	MSCL-OP153M MACL-153M//MA-R PD-6WCL
Leviton	6672 IPL06	6674	DSL06	RNL06

Accessories (Standard)

Accessories (Optional)



<b>Mounting Bracket</b>	<b>Wire Nuts</b>	<b>Bolts</b>	<b>15W EM Driver</b>	<b>PIR Bi-Level Sensor</b>
Compatible to 2.75" or 3.50" Junction Box			EM15-HMB/170DC CRCU-EM/JBM	LDLL-E2/MSP/W

Archipelago Lighting, Inc.

| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 98  
[Go to Bill of Materials](#)


Type: SM2


Powered by 4submittal.com



LDLL | Eclipse-II

EM Driver / J-Box (Optional)

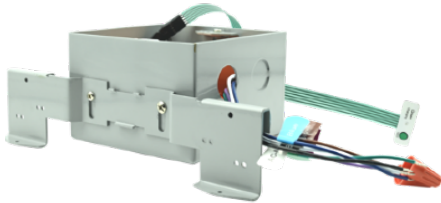

Technical Specification	CRCU-EM/JBM
Emergency Power	15W Max
Installation Method	Recessed
IP Rating	IP20
CEC T.24/JA8 Compliant	Yes
Color Finish	Grey
Physical Features	<ul style="list-style-type: none"><li>Directly connect to AC input</li><li>Fits 2.75" and 3.5" J-Box</li><li>Supports recessed in-ceiling mount</li></ul>
Self-Diagnostic Test Switch	<ol style="list-style-type: none"><li>Emergency conversion kit will go into emergency mode when test switch is pressed while main power is ON.</li><li>Will go into charging mode if test switch is not pressed.</li><li>In emergency mode, pressing the test switch for 3-seconds will inactivate emergency mode.</li></ol>
Indicator Status Light	<ol style="list-style-type: none"><li>Green ON: Charging mode / charging full</li><li>Green OFF: Mains power OFF / discharging mode</li></ol>
Dimension	W4.29in x H2.96 

Archipelago Lighting, Inc.


| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220

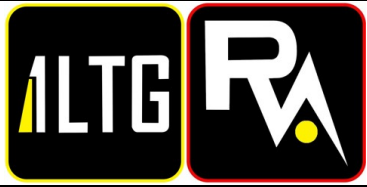

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 99  
[Go to Bill of Materials](#)

Type: SM3

Powered by 4submittal.com




LIGHTING | REINVENTED

plano **ARCH** PRO

## LDLL | Eclipse-II

Product Data Sheet

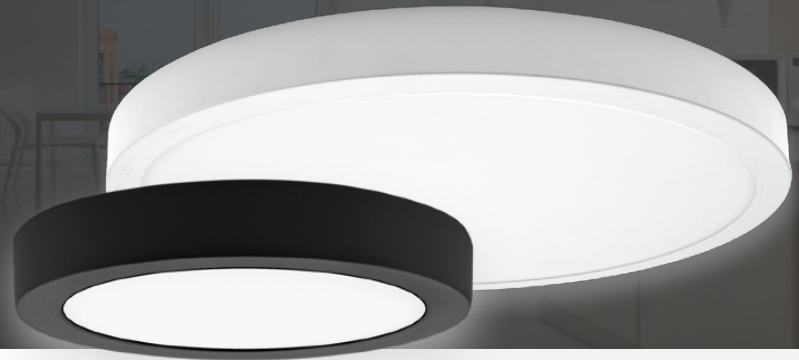

COMMERCIAL-GRADE

### LED Surface Mount Puck Downlight



CCTselect



TruColor Rendering

5" / 7" / 9" / 11" / 13"

#### Product Overview

**INTENDED USE** — The Eclipse-II Series is built for 5-way switchable CCT and is suitable for use in dry, damp, and wet locations, perfect for use in kitchens, hallways, stairways, bathrooms, closets, and just about anywhere you'd need it.

**CONSTRUCTION** — The die-cast aluminum housing is designed for durability and ruggedness.

**INSTALLATION** — Quick-mount aluminum backplate for easy installation.

**WARRANTY** — Featuring a no-compromise 5-year warranty, Energy Star and JA8-compliant, the Eclipse-II is a clean and modern solution for surface mounted driverless design.

ARCHIPELAGO luminaires and LED components undergo rigorous testing by an independent laboratory to meet IESNA LM-79 and LM-80 standards for light output and lumen maintenance. LED color temperature is warranted to shift no more than 180K over the standard warranty period. Correlated Color Temperature (CCT) follows the guidelines set forth in the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

#### Applications



Residential



Hallway



Patio



Entryway

#### Main Features

- Low-Profile Edge-Lit Surface Mount Design
- Durable Di-Cast Aluminum Trim w/ Frosted Lens
- For New Construction or Retrofit Applications
- Suitable for Use in Dry, Damp and Wet Locations
- Suitable for Use in Closets, In Accordance to NEC Guidelines
- Installs on Ceiling and Standard Junction Boxes
- Dimmable to 10% on Compatible TRIAC Dimmers
- 5-Year, 50,000 Hr Warranty
- CEC T24 JA8 Compliant
- NEC Compliant, Suitable for Use in Closet
- Energy Star Certified for 5", 7", 9"

#### Product Warranty\*

5-Year Warranty



50,000 Hrs



\* Standard warranty. Extended warranty available.

Archipelago Lighting, Inc.

| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

[Contact Us](#)





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W


Line Item#: 99  
[Go to Bill of Materials](#)

Type: SM3

Powered by 4submittal.com



LDLL | Eclipse-II

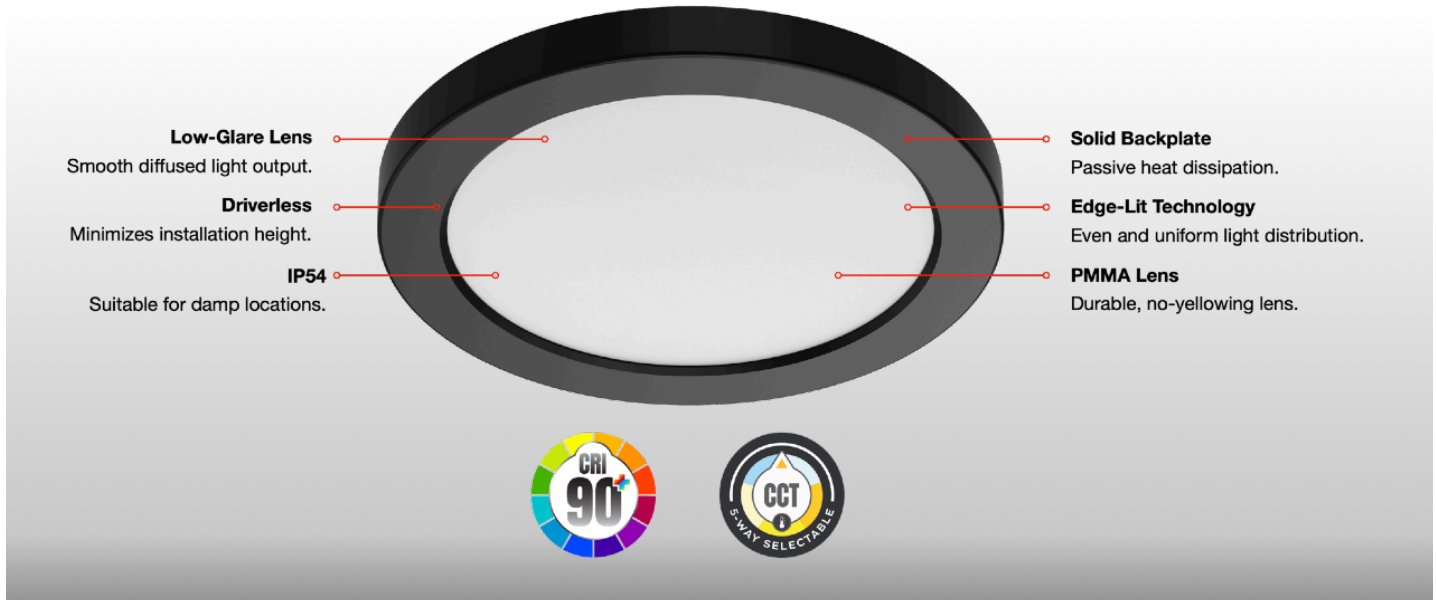

#### Ordering Guide<sup>1</sup>

Model Series	Size (in) / Wattage (W)		Series	CCTselect (K)	Finish Color
<b>LDLL</b> LED Surface Mount Puck Downlight	<b>0510</b> 5inch / 10W <b>0715</b> 7inch / 15W <b>0918</b> 9inch / 18W <b>1121</b> 11inch / 21W <b>1324</b> 13inch / 24W	-	<b>E2</b> Eclipse-II	<b>S5</b> 5-CCTselect: 2700K 3000K 3500K 4000K 5000K	/ <b>B</b> Black <b>W</b> White
<b>CATALOG #:</b>					
<b>LDLL</b>		-	<b>E2</b>	<b>S5</b>	/

#### Options Guide<sup>2</sup>

EM Driver <sup>3</sup>	Motion Sensor
<input type="checkbox"/> <b>EM15</b> 15W EM Driver <input type="checkbox"/> <b>CRCU</b> 15W EM Driver with Junction Box	<input type="checkbox"/> <b>MSP/W</b> PIR Bi-Level Sensor for 7" and 9" ONLY (White Finish)
<b>OPTIONAL ACCESSORIES #:</b>	
	/

NOTE:

- Only one selection may be applicable within the same category.
- Multiple selections may be applicable within the same option category. See Compatible Accessories below for details.
- EM drivers only work with 7, 9, 11 and 13in fixtures

#### Archipelago Lighting, Inc.


| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

#### Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)






+1 (866) 912-3220

	Date: 1/12/2026	Description: LDLL0510-E2S5/W	Line Item#: 99
	Project: FINDLAY FLATS		<a href="#">Go to Bill of Materials</a>
			Type: SM3
Powered by 4submittal.com			



LDLL | Eclipse-II

Sizing & Measurements


Model Series	Dimensions	Overall Diameter (in)	Depth (IN)
LDLL0510-E2		5.51	0.79
LDLL0715-E2		7.48	0.82
LDLL0918-E2		8.86	0.79
LDLL1121-E2		10.98	0.98
LDLL1124-E2		12.80	0.98

Recommended Dimmers

Make	Models			
Lutron	TG-600PR-WH S-600PR-WH CTCL-153PDH-WH	TGCL-153PH-LA SLV-600P-AL DV-600PR-WH	SCL-153PH-WH GT-600P DVCL-153P	MSCL-OP153M MACL-153M//MA-R PD-6WCL
Leviton	6672 IPL06	6674	DSL06	RNL06

Accessories (Standard)

Accessories (Optional)



<b>Mounting Bracket</b>	<b>Wire Nuts</b>	<b>Bolts</b>	<b>15W EM Driver</b>	<b>PIR Bi-Level Sensor</b>
Compatible to 2.75" or 3.50" Junction Box			EM15-HMB/170DC CRCU-EM/JBM	LDLL-E2/MSP/W

Archipelago Lighting, Inc.

| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 99  
[Go to Bill of Materials](#)


Type: SM3


Powered by 4submittal.com



LDLL | Eclipse-II

EM Driver / J-Box (Optional)

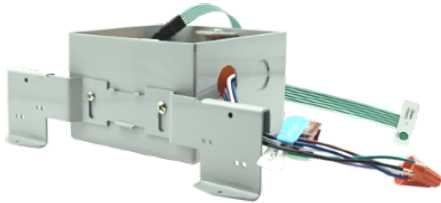

Technical Specification	CRCU-EM/JBM
Emergency Power	15W Max
Installation Method	Recessed
IP Rating	IP20
CEC T.24/JA8 Compliant	Yes
Color Finish	Grey
Physical Features	<ul style="list-style-type: none"><li>Directly connect to AC input</li><li>Fits 2.75" and 3.5" J-Box</li><li>Supports recessed in-ceiling mount</li></ul>
Self-Diagnostic Test Switch	<ol style="list-style-type: none"><li>Emergency conversion kit will go into emergency mode when test switch is pressed while main power is ON.</li><li>Will go into charging mode if test switch is not pressed.</li><li>In emergency mode, pressing the test switch for 3-seconds will inactivate emergency mode.</li></ol>
Indicator Status Light	<ol style="list-style-type: none"><li>Green ON: Charging mode / charging full</li><li>Green OFF: Mains power OFF / discharging mode</li></ol>
Dimension	<p>W4.29in x H2.96</p> 

Archipelago Lighting, Inc.


| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220

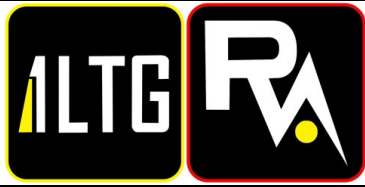

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
SM56885FTSN

Line Item#: 100  
[Go to Bill of Materials](#)

Type: SM13

Powered by 4submittal.com


Essentials - 588x | SM56885FTSN

Job Name: Job Type: Quantity: Comments:



#### PRODUCT DESCRIPTION

Maxim Lighting's commitment to both the residential lighting and the home building industries will assure you a product line focused on your lighting needs. With Maxim Lighting you will find quality product that is well designed, well priced and readily available.





#### MEASUREMENTS

DIMENSION : 9" L x 9" W x 5" H  
HANGING WEIGHT : 2.18 lb

#### LAMPING

INPUT VOLTAGE : 120V  
BULB : 60W Incandescent E26 Medium , 120W Total  
BULB INCLUDED : (Not Included)  
DIMMABLE : Yes

#### FINISHES OPTION

 Oil Rubbed Bronze (OI)  
 Satin Nickel (SN)

#### GLASS

Frosted FT

#### MATERIAL

Glass, Steel

#### RATINGS

cETLus  
Damp Location



#### ADDITIONAL

OPERATING TEMPERATURE:  
-20°C (-4°F), 40°C (104°F)

Always consult a qualified electrician before installing any lighting product.

# STUDIO•M

Modifications or Customizations: Please email [contract@studiomlighting.com](mailto:contract@studiomlighting.com)

Sample Request: Please email [order@studiomlighting.com](mailto:order@studiomlighting.com) with subject line

"Sample Order, [Project Name] / [Specifier/Designer]"

All samples are subject to Studio M approval and must show proof of project and/or explanation.

Job Name:	Job Type:
Quantity:	Comments:

StudioMlighting.com - 1.626.956.4209





Date: 1/12/2026

Project:  
FINDLAY FLATSDescription:  
LED-A19-9W-5CCTLine Item#: 101  
[Go to Bill of Materials](#)

Type: SM13 LAMP

Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COMProject: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_



LED Bulbs

**A Bulb SERIES: 5-CCT LED BULBS**  
A-19, A-21

A-19



A-21

**Detail Specifications**

- IP Rating: Damp Location
- Beam Angle: 220°
- 5-CCT: 27/30/35/40/50K
- Chip: SMD 2835, R9 >50, CRI >90
- Operating Temperature: -4° - 114° F
- Average life (L70) of 25,000 hours

**Applications:**

- Decorative Lighting
- Interior Lighting
- Table & Floor Lamps
- Showcases
- Residential, Multi-Family, Commercial

**Product Information:**

- Suitable for use in existing fixtures
- Instant-On to full brightness

**Driver Options:**

- 120V
- Triac Dimmable
- PF >0.9, 50/60Hz

**Mounting & Installation:**

- E26 Socket
- Direct A Lamp Replacement

**Packaging:**

- All bulbs come in individual color boxes, but are sold in inner carton qty packs only

Carton Qty.	A-19	A-21
Inner Carton	10	10
Master Carton	100	100

**Certifications:**

- ETL Listed for USA and CA
- Energy Star
- Title 20 and JA8-2022 Approved
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

**Dimmer List:**

Leviton	6674
Lutron	LGCL-153P
Lutron	DVCL-153P
Lutron	CTCL-153P
Lutron	MAELV-300

**Series****LED-A19-9W-5CCT**

600 Lumens 60W Equivalent


**LED-A21-15W-5CCT**

1,600 Lumens 100W Equivalent

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 10.23

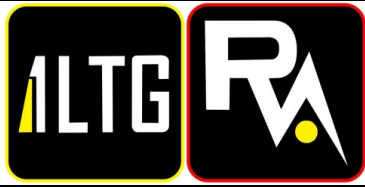

Date: 1/12/2026

Project:  
FINDLAY FLATSDescription:  
LED-CYE-UD-3-3P30-TRI-BL-PCLine Item#: 102  
[Go to Bill of Materials](#)

Type: WM1

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COMProject: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_

Area Lights



## M-Line: 3" Edge-Lit Cylinder Up/Down Light

3-CCT w/ Photocell



WATT	LUMENS
10	1,200
20	2,400
30	3,600

**Detail Specification:**

- Finish: Bronze, Black, White
- IP Rating: Wet Location IP65
- Beam Angle: 60°
- CCT: 30/40/50K Selectable
- Wattage: 30/20/10w
- Lumens: 3,600
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 122° F
- BUG: B2-U2-G2
- Lens: Clear glass with optics
- Average life (L70) of 50,000 hours

**Applications:**

- Dock and Loading
- Walkways & Pathways
- Parking Lots
- Hospitality, Multi-Family
- Outdoor Corridors
- General Outdoor Lighting
- Residential, Commercial and Industrial

**Product Information:**

- Sturdy die-cast aluminum housing finished with corrosion free powder coat
- Photocell included on each fixture. Easy disconnect.
- 1.5' STJW 18.3 AWG cable whip included
- Illuminates up and down and edge
- Select-n-Switch Technology: 3-CCT Selectable + 3-Power Selectable
- Instant-On to full brightness

**Driver Options:**

- UNV: 120-277V 0-10V Dimmable
- Built in 6Kv Surge Protector
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz

**Mounting & Installation:**


- Mounts to 3 or 4" J-box
- Covers a standard 4" recessed j-box

**Certifications:**

- UL Listed for USA and CA
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

**Series****LED-CYE-UD-3-3P30-TRI -**  
3" Up/Down Cylinder • 30/20/10W**Finish****BZ**  
Bronze  
**WH**  
White  
**BL**  
Black**Photocell****PC**  
Photocell  
is included.  
Easy quick  
disconnect.  
(PC-3/4-3PIN-LV)*Specs and model numbers are subject to change with or without notice.***EnVision LED Lighting, Inc.**6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 10.23

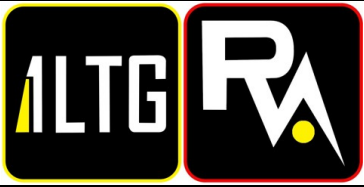

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-CYE-UD-3-3P30-TRI-BL-PC

Line Item#: 102  
[Go to Bill of Materials](#)

Type: WM1

Powered by 4submit.com


**EnVisionLED**<sup>TM</sup>  
WWW.ENVISIONLEDLIGHTING.COM

## M-Line: 3" Edge-Lit Cylinder Up/Down Light 3-CCT w/ Photocell

### FEATURES




### DIMENSIONS

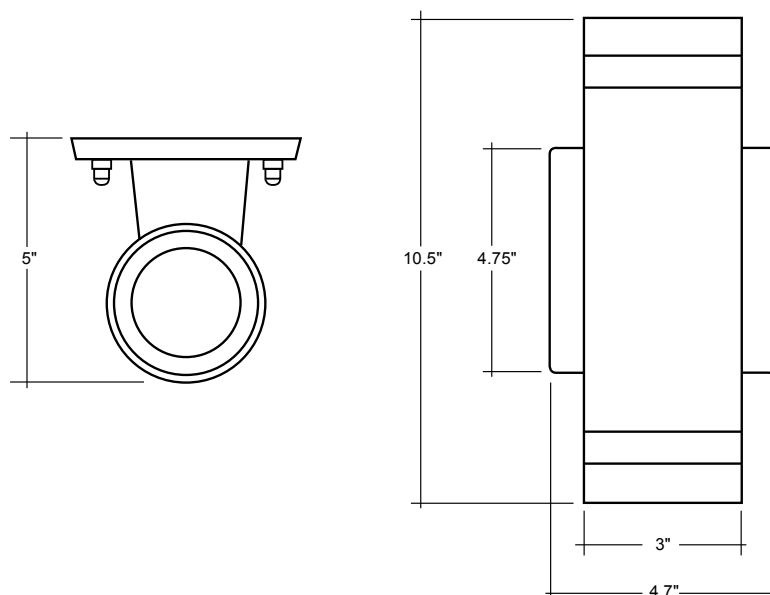

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

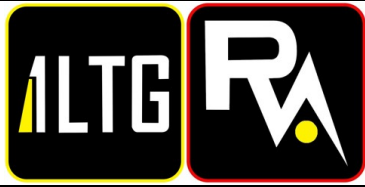

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-VT-ADJ-24-21W-5CCT-BN

Line Item#: 103  
[Go to Bill of Materials](#)

Type: V1

Powered by 4submittal.com

**EnVisionLED**<sup>TM</sup>  
WWW.ENVISIONLEDLIGHTING.COM

## Vanity Fixtures

### Square Adjustable Swivel



-BL



-BN



-CH



FRONT VIEW



90° Rotatable Angle

Vanity Fixture



#### Detail Specifications:

- Power: 21W
- Lumens: 2,700
- Finishes: Black, Brushed Nickel, Chrome
- IP Rating: IP54 Damp Location
- Beam Angle: 100°
- Chip: SMD 2835, R9 >50, CRI >90
- Operating Temperature: -40° - 114° F
- Lens: Frosted Acrylic, non-yellowing
- Average life (L70) of 50,000 hours

#### Applications:

- Bathrooms & Lavatories
- Hallways & Corridors
- Artwork, Museums
- Residential & Multifamily
- Education, Healthcare, Retail, Hospitality

#### Product Information:

- Available in 23.6" length
- Adjustable Angle: Lens swivels up and down
- Wide j-box for easier installation in retrofit and new construction applications
- Select-n-Switch Technology: 5-CCT Selectable

#### Driver Options:

- Triac & ELV dimmable down to 5%
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz
- Built in 2.5Kv Surge Protector
- Flicker Free

#### Mounting & Installations:

- 30/40 Junction Box
- Surface mount bracket included

#### Certifications:

- ETL Listed for USA and CA
- CA Title 24 JA8-2022 CEC Listed
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

#### Series

LED-VT-ADJ-24-21W-5CCT-BL

Black

LED-VT-ADJ-24-21W-5CCT-BN

Brushed Nickel

LED-VT-ADJ-24-21W-5CCT-CH


Chrome

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 04.25

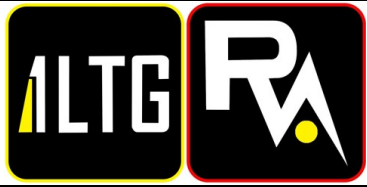

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-VT-ADJ-24-21W-5CCT-BN

Line Item#: 103  
[Go to Bill of Materials](#)

Type: V1

Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM


## Vanity Fixtures

### Square Adjustable Swivel

#### FEATURES




90° Rotatable Angle



5-CCT Selectable

#### MEASUREMENTS

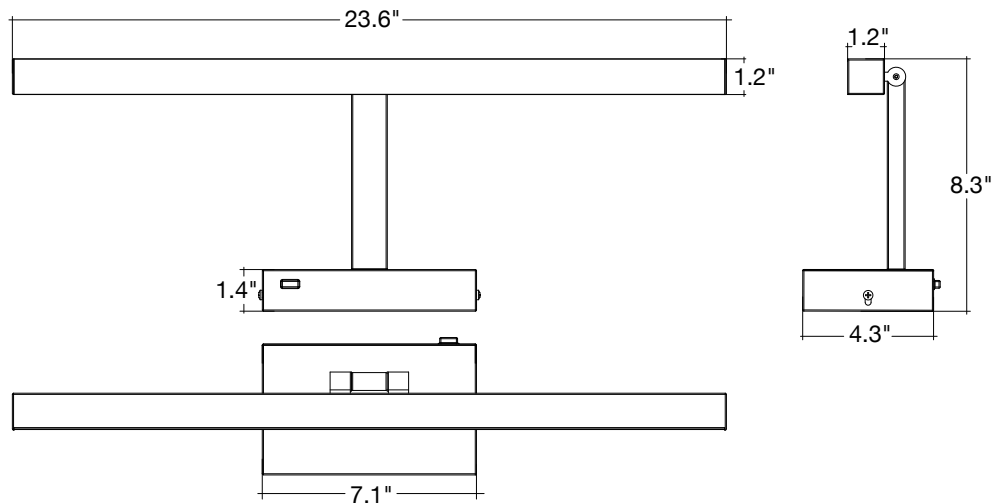

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)



Date: 1/12/2026

Project:  
FINDLAY FLATSDescription:  
LED-RST-4FT-3M40W-4CCT-SRLine Item#: 104  
[Go to Bill of Materials](#)

Type: ST1

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## Round LED Strip Fixtures

### 5-CCT & 3-Power Selectable

### Sensor Ready

Project: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_

Strips



#### Detail Specification:

- Finish: White, Custom finishes available
- IP Rating: Damp Location (IP44)
- Beam Angle: 130°
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 122° F
- Lens: Round Acrylic Frosted Lens
- Average life (L70) of 50,000 hours

#### Applications:

- Stairwell & Hallways
- Utility & Storage
- Garage Structures
- Office and Meeting Rooms
- Shop Lighting
- Commercial and Industrial

#### Product Information:

- Aluminum housing finished with corrosion free power coat
- Easy j-box access: snap on and off tool-less design
- 40 J-box cover included with every fixture
- Audio Jack Sensor Ready (with RST-SR bracket)
- Sensor Options:
  - Standard Sensors
  - SILVAIR Bluetooth Mesh
  - ENVISIONLS Bluetooth
  - [Click Here](#) for More Information

#### Driver Options:

- UNV: 120-277V 0-10V Dimmable
- Optional 347-480V step down transformer available
- THD: <15% (+/-5% tolerance), PF >0.9, 50/60Hz
- 12V low voltage aux output for controls
- Flicker Free

#### Mounting & Installation

- Surface mount into 30 or 40 j-box
- Optional 10' & 20' suspension kit available
- Optional 6' chain mount available
- Rated for installation in closets

#### Certifications

- UL Listed for USA and CA
- DLC Premium Listed
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

3M25W		3M40W		3M60W		3M80W		3M100W	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
15	2,100	20	2,600	40	5,200	50	6,500	70	9,100
20	2,800	30	3,900	50	6,500	65	8,450	85	11,050
25	3,500	40	5,200	60	7,800	80	10,400	100	13,000

Series	Sensor <sup>1</sup>	Emergency <sup>2</sup>	Finish <sup>3</sup>	Flex
LED-RST-2FT-3M25W-5CCT-SR	(Blank)	(Blank)	(Blank)	(Blank)
LED-RST-4FT-3M40W-5CCT-SR	No Sensor	No Emergency	White	No Flex
LED-RST-4FT-3M80W-5CCT-SR	BMS <sup>1</sup>	Backup	BL	6FLX
LED-RST-8FT-3M60W-5CCT-SR	Microwave	EMB	Black	6' Flex
LED-RST-8FT-3M100W-5CCT-SR	Bi-Level Motion	Emergency	GRY <sup>3</sup>	Whip
	+ Daylight Sensor	EMB20	Gray	
	(Internal Sensor)	Backup	BRZ <sup>3</sup>	
	BMSPIR	Emergency	Bronze	
	Available for field install.	Backup (20W)	CS <sup>3</sup>	
			Custom Color	

1. Sensor Note:  
Microwave: Detects motion through barriers such as walls, and doors. Ideal for applications where obstacles might obstruct the line of sight. Works effectively outdoors, in large open spaces, & parking lots. Do not use in areas of high vibrations or metal.  
PIR: Ideal for indoor environments with clear lines of sight to the area of interest. Detects warm objects, like a person or animal. Good for high vibration, areas of metal.

2. Standard emergency is 8W (1,040LM). 20W available, inquire factory

3. Standard quick ship finish is white & black. Other colors are custom finishes.

Optional Accessories (Order Separately)			
Sensors	Suspension Kit	Accessories	Wire Guards
RST-SR Receptacle for Sensor (Required for below sensors)	SK-10FT-Y-LC-PD 10' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)	RST-SM-CN Surface mount linkable bracket	RST-2FT-WG 2ft Wire Guard
S-AUD-PIR-1 PIR Bi-Level Motion + Daylight Sensor Remote Required: (S-LINE-R)	SK-20FT-Y-LC-PD 20' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)	RST-PDM-CN Pendant mount linkable bracket	RST-4FT-WG 4ft Wire Guard (order 2 for 8ft fixtures)
S-AUD-PIR-BT PIR ENVISIONLS Bluetooth Control			
S-AUD-PIR-SL PIR SILVAIR Bluetooth Mesh			

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 10.25



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-RST-4FT-3M40W-4CCT-SR

Line Item#: 104  
[Go to Bill of Materials](#)

Type: ST1


Powered by 4submittal.com




## Round LED Strip Fixtures

### 5-CCT & 3-Power Selectable

#### FEATURES

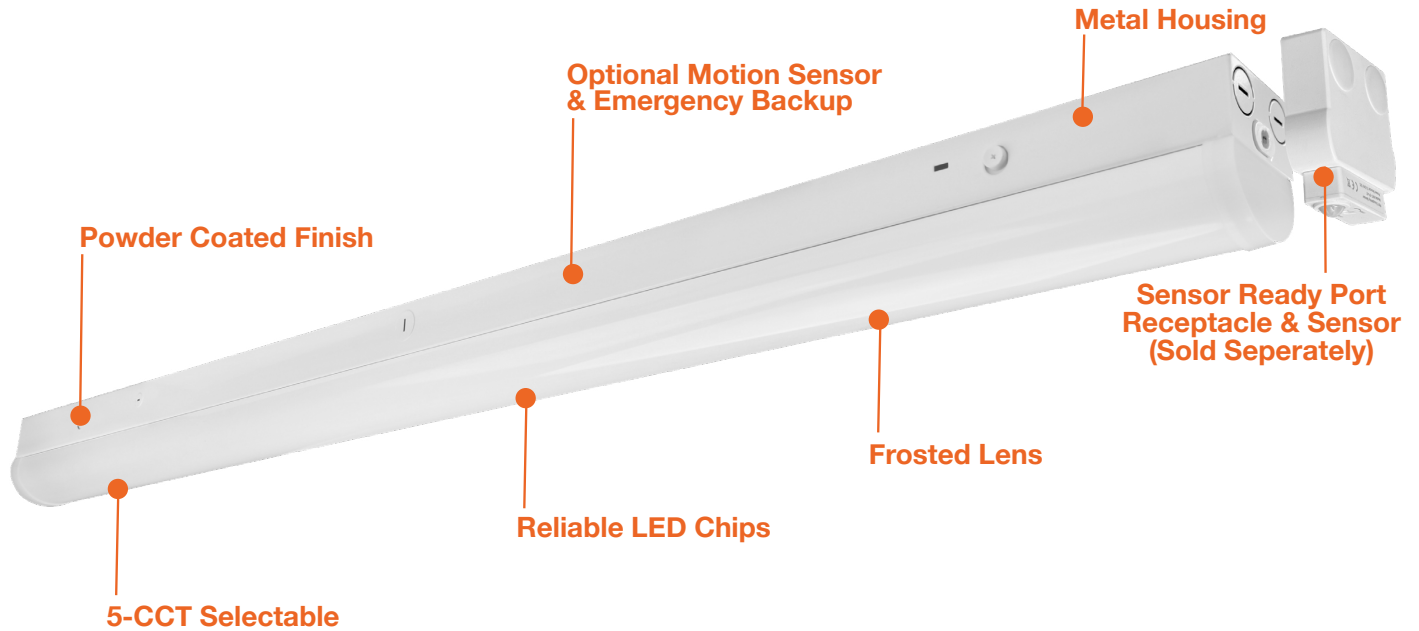

#### DIMENSIONS

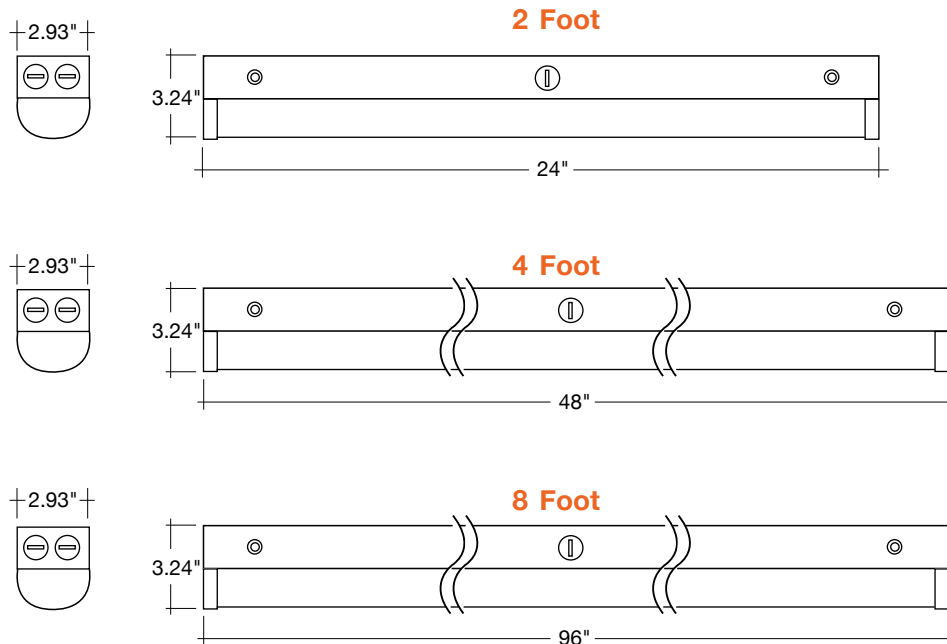





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-RST-4FT-3M40W-4CCT-SR

Line Item#: 104  
[Go to Bill of Materials](#)

Type: ST1

Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Round LED Strip Fixtures G3

### 4-CCT & 3-Power Selectable

#### ACCESSORIES



RST-SR



S-AUD-PIR-1  
S-AUD-PIR-BT  
S-AUD-PIR-SL



SK-10FT-Y-LC-PD  
SK-20FT-Y-LC-PD




RST-SM-CN




RST-PDM-CN




RST-2FT-WG  
RST-4FT-WG

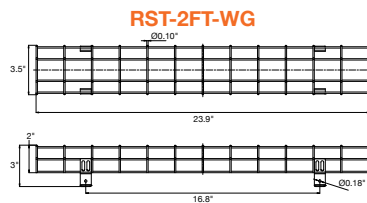

RST-2FT-WG

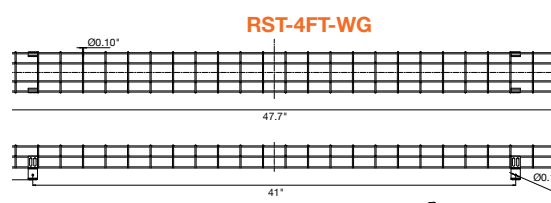

RST-4FT-WG



2-RST-4FT-WG FOR 8FT



Model	Voltage	Watts	Lumens	Color	CRI
LED-RST-2FT-3M25W-5CCT-SR	120-277V	25/20/15w	3,500/2,800/2,100	30/35/40/50/65k	>80
LED-RST-4FT-3M40W-5CCT-SR	120-277V	40/30/20w	5,200/3,900/2,600	30/35/40/50/65k	>80
LED-RST-4FT-3M80W-5CCT-SR	120-277V	80/65/50w	10,400/8,450/6,500	30/35/40/50/65k	>80
LED-RST-8FT-3M60W-5CCT-SR	120-277V	60/50/40w	7,800/6,500/5,200	30/35/40/50/65k	>80
LED-RST-8FT-3M100W-5CCT-SR	120-277V	100/85/70w	13,000/11,050/9,100	30/35/40/50/65k	>80

#### SENSORS

Pre-Installed Accessory Model	Description
RST-SR	Sensor Receptacle (REQUIRED)
S-AUD-PIR-1	PIR Bi-Level + Daylight: Audio Jack
S-AUD-PIR-BT	PIR Bi-Level + Daylight: Audio Jack Bluetooth EnVisionLS App
S-AUD-PIR-SL	PIR Bi-Level + Daylight: Audio Jack SILVAIR

#### SUSPENSION KIT


Model	Description
SK-10FT-Y-LC-PD	10' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)
SK-20FT-Y-LC-PD	20' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)

#### ACCESSORIES

Model	Description
RST-SM-CN	Surface Mount Linkable Bracket
RST-PDM-CN	Pendant Mount Linkable Bracket

#### WIRE GUARDS

Model	Description
RST-2FT-WG	2ft Wire Guard
RST-4FT-WG	4ft Wire Guard (order 2 for 8ft fixtures)

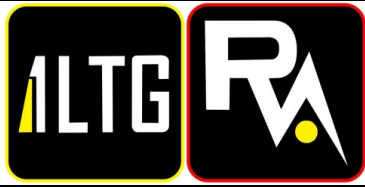

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-RST-4FT-3M40W-4CCT-SR

Line Item#: 104  
[Go to Bill of Materials](#)

Type: ST1

Powered by 4submittal.com

## EnVisionLED™ Control Options

EnVision LED offers 3 control systems compatible with our LED Fixtures for projects of all sizes and budgets.

	Basic Controls	EnVisionLS	EnVisionLED™ x SILVAIR
<b>Description</b>	Standard Plug In Sensors	Basic Bluetooth Wireless Control	Advanced Bluetooth Wireless Control
<b>Recommended Quantity</b> (but not limited to)	N/A	>40-50 Nodes	>50 Nodes
<b>Maximum Zone Quantity</b>	N/A	100	3,000
<b>Commissioning Tool</b>	Remote Only	ENVISIONLS App	SILVAIR App
<b>Commissioning Process</b>	Individually Set via Remote	Wireless Must be done on site	Wireless- Initial linking must be done on site. Commissioning can be done via desktop remotely.
<b>Floor Plan Upload</b>	N/A	N/A	Yes Add a floor plan and mark luminaires & zones via desktop
<b>Gateway</b>	N/A	N/A	Required only for energy monitoring, advanced scheduling, automated demand response.
<b>Individual Luminaire Control</b>	Yes	Yes	Yes
<b>Luminaire Grouping Zoning</b>	N/A	Yes	Yes
<b>High End Power Low End Power</b>	Yes but limited (View Remote)	Yes	Yes
<b>Cost</b>	\$	\$\$	\$\$\$
<b>DLC NLC Listed</b>	N/A	Yes	Yes
<b>Energy Monitoring &amp; Data Reporting</b>	N/A	N/A	Monitor energy usage per individual zone & retrofit cost savings calculation + detailed reporting





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-RST-4FT-3M40W-4CCT-SR

Line Item#: 104  
[Go to Bill of Materials](#)

Type: ST1

Powered by 4submittal.com





## Compatible Products:

EnVision offers a variety of nodes, sensors, & gateways that are controlled via remote, ENVISIONLS Bluetooth Mesh & SILVAIR Bluetooth Mesh on all of our 0-10V dimmable fixtures.






### Individual Fixture Controls: PIR Sensor, Bi-Level Dimming, Daylight


Basic Note: -1 • ENVISIONLS Models Note: -BT • SILVAIR Models Note: -SL


	MODEL #	DESIGN	RECOMMENDED FIXTURE	FEATURES
	S-TWC-PIR-1 S-TWC-PIR-BT S-TWC-PIR-SL	Twist-C Control Sensor	Sensor Ready Fixtures: Area Lights, Canopies, Flood Lights, High Bays	All models are equipped with PIR occupancy sensing, high & low end bi-level dimming, & daylight sensing.
	S-TWC-90 + S-TWC-PIR-1 S-TWC-90 + S-TWC-PIR-BT S-TWC-90 + S-TWC-PIR-SL	Twist-C Control Sensor + 90 Degree Arm	Cylinders, Strips, Wall Packs	
	S-AUD-PIR-1 S-AUD-PIR-BT S-AUD-PIR-SL	2.5m Audio Jack	Panels & Troffers	
	S-SN-PIR-1 S-SN-PIR-BT S-SN-PIR-SL	Snap In Sensor	Troffers & Wraps	

### Group Controls ENVISIONLS Models Note : -BT • SILVAIR Models Note: -SL

	MODEL #	DESIGN	VOLTAGE	FEATURES	RECOMMENDED FEATURES
	S-CM-PIR-LV-BT S-CM-PIR-LV-SL	Ceiling Mounted PIR Sensor	12-24V	PIR Sensor, Bi-Level Dimming, Daylight, 360° detection, 12' Max Mounting Height	Connects to 0-10V dimmable fixtures
	S-WM-PIR-CUNV-BT S-WM-PIR-CUNV-SL	Wall Mounted PIR Occupancy Sensor, Bi-Level Dimming, Daylight	120-277V	On/Off PIR occupancy sensor, 180° detection, 30' detection @ 4' Mounting Height	Connects to LED fixtures
	S-WS-120V-USB-SL		120V	Dimming Wall Socket, Two Sockets	Floor Lamps, Other Lamps

### Gateway (Silvaire Only) 4.5–5.5 V DC, 2A Power over Ethernet 36–57 V DC

	MODEL #	DESIGN	VOLTAGE	FEATURES	RECOMMENDED FEATURES
	SGW-102	Wall or Ceiling Mounted	POE	Advanced Energy Monitoring Control	Connects to Silvaire Controls. Gateway is not required.

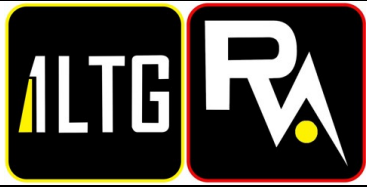

Date: 1/12/2026

Project:  
FINDLAY FLATS


Description:  
CFR525J1-N10-WP-1-FM

Line Item#: 106  
[Go to Bill of Materials](#)

Type: F2

Powered by 4submittal.com

**CARRO**  
SMART FANS | LIGHTING

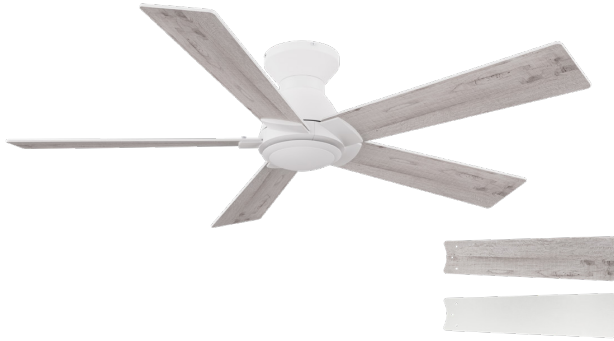

#### DC Motor

- 10-Speed | Reversible
- Motor | 148 X 15mm
- RPM: High 205 Low 65
- 4630 CFM | 26 W | Efficiency = 174 CFM / Watt

#### Blade

- 5-Blade | 52" Sweep
- Material: Highly-Compressed Plywood
- 11° Pitch

#### Light Kit

- No Light
- Metal Plate

#### Control

- Remote (Standard)
- Wall Control (Optional\*)
- Pull Chain (Optional\*)

#### Location

- Indoor / Outdoor (Damp Rated)

#### Certification

- ETL Listed

#### Warranty

- Fan Motor: Three-Year Limited Warranty
- Fan Blade: Three-Year Limited Warranty
- Other: Three-Year Limited Warranty

#### Measurements

- Dimensions (in.):  
10.8 H (to lowest point) x 7 W (housing) x 7.2 H (top of blade)
- Product Weight (lbs.): 11.2 N.W. | 15 G.W.
- Box (in.): 23 L X 11 W X 10 H

#### Shipping

- Container Loading:  
20GP 680 pcs | 40GP 1400 pcs | 40HQ 1640 pcs

SKU #

CFR525J1-N10-WP-1-FM

Motor/Blade Finish

White | White & Whitewashed  
Reversible Plywood Blades

## LURGAN

5-Blade | 52 " | Flushmount | Remote Control  
DC MOTOR 120V  
NO LIGHT



Intertek


Fan Motor

Fan Blade

Other

#### Dimensions


10.8"	7"	7.2"
Height (lowest point)	Width (housing)	Height (top of blade)

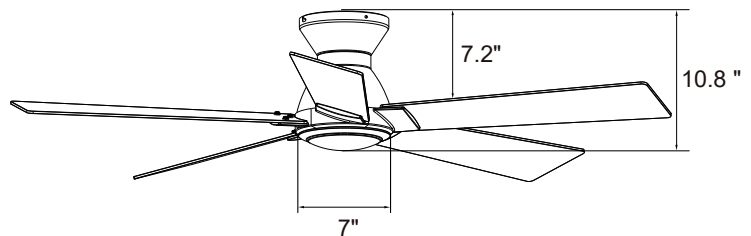


#### Fan Control Features and Options

- Simple and intuitive design with standard layout.
- Multi-functional fan speed control with fan forward/reverse, and fan on/off.
- Remote (Standard)
- Hardwired Wall Control (Optional\*)
  - Single Live Wire No Neutral Needed
  - Push Button or Knob design available
- Pull Chain (Optional\*)

\* Optional controls at an additional cost

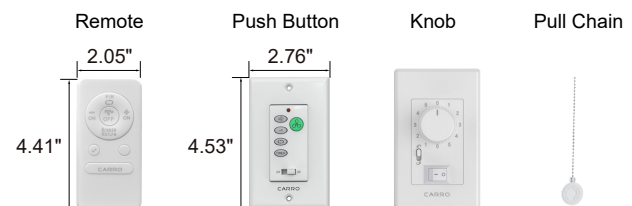

\* Data subject to change without notice.

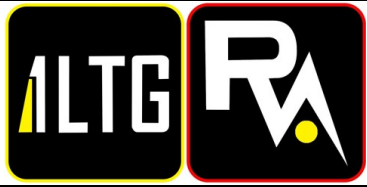

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-DH-HO

Line Item#: 107  
[Go to Bill of Materials](#)

Type: EM

Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Emergency Bug Eyes Square Models



Emergency



### Detail Specifications:

- Finish: White
- IP Rating: Dry Location
- Lumen Options
  - Standard: 3W 140LM
  - High Output: 6W 650LM
- Operating Temperature: -40° - 104° F
- Average life (L70) of 50,000 hours

### Applications:

- Exit Doors
- Corridor Intersections
- Exit Stairways
- Exit ramps

### Product Information:

- Built-in test switch and charge indicator light
- Overcharge and over-discharge protection
- Injection-molded thermoplastic housing, PC cover
- Backup Time: >90 minutes
- Recharge time: 24 hours

### Driver Options:

- Dual Voltage 120/277V
- PF >0.9, 50/60Hz
- Nickel Cadmium Battery 3.6V
- This fixture is non-dimmable

### Mounting & Installation:

- Wall and ceiling mounted
- Universal J-box mounting pattern

### Certifications:

- UL Listed for USA and CA (UL94V-0 Flame Rating)
- Meets UL924, NDPA 101
- Approved for CA T24
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

Series

**LED-EM-DH**

3W • 140Lm

**LED-EM-DH-HO**


6W • 650Lm

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 01.24

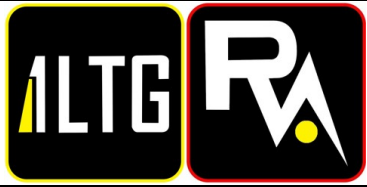

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-DH-HO

Line Item#: 107  
[Go to Bill of Materials](#)


Type: EM

Powered by 4submittal.com


**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Emergency Bug Eyes Square Models

### FEATURES

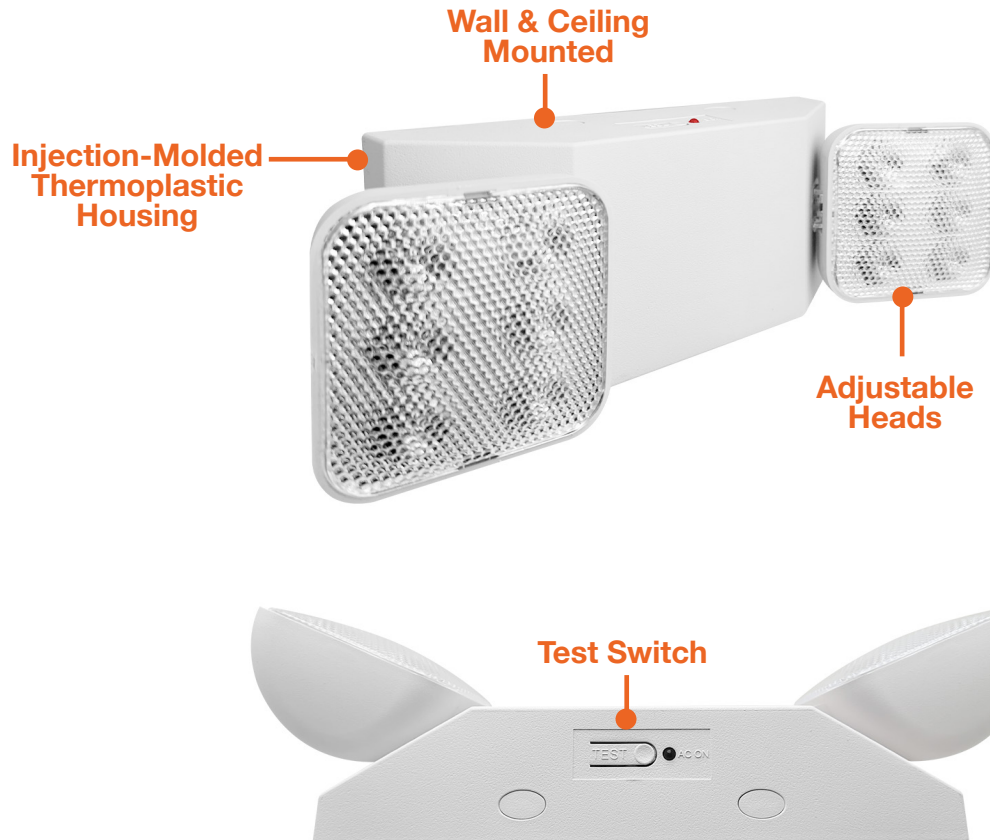

### DIMENSIONS

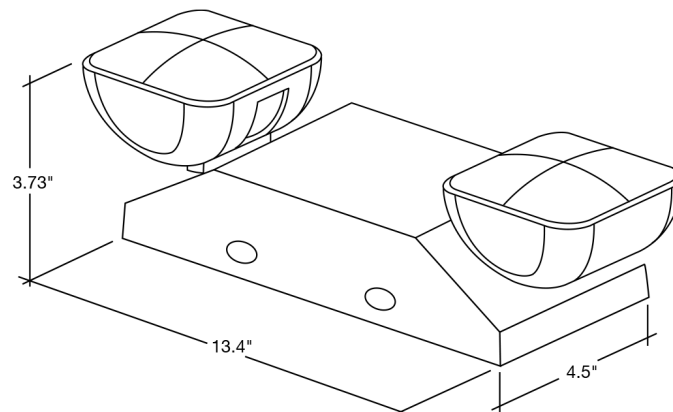

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-EXT-RG-WH-CMB-RC

Line Item#: 108  
[Go to Bill of Materials](#)

Type: EX/EM

Powered by 4submittal.com

**EnVisionLED**<sup>TM</sup>  
[WWW.ENVISIONLEDLIGHTING.COM](http://WWW.ENVISIONLEDLIGHTING.COM)

## Emergency Exit Sign With Bug Eyes



### Emergency Exit Signs



Project: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_

#### Detail Specifications:

- Finish: White Finish
- IP Rating: IP20, Dry Location
- Wattage: 3.5W
- Lumens: 140
- Operating Temperature: 32°F to 104°F
- Lens: Red or Green
- Remoted Capable
- Compatible with: LED-EM-RC-1, LED-EM-RC-2
- Average life (L70) of 50,000 hours

#### Applications:

- Exit Doors
- Corridor Intersections
- Exit Stairways
- Exit Ramps

#### Product Information:

- Built-in test switch and charge indicator
- Injection-molded thermoplastic housing, PC cover
- Backup Time: >90 minutes
- Recharge time: 24 hours
- Single Face
- 6" height letters with 3/4" stroke, viewable from 100ft away

#### Driver Options:

- Dual Voltage 120/277V
- PF >0.9, 50/60Hz

#### Mounting & Installations:

- Wall and ceiling mounted
- Universal J-box mounting pattern

#### Certifications:

- UL Listed for USA and CA (UL94V-0 Flame Rating)
- Meets UL924, NDPA 101
- Approved for CA T24
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

#### REMOTE HEAD OPTIONS

LED-EM-RC-1

LED-EM-RC-2

Series

**LED-EM-EXT-RG-WH-CMB-RC**

Red/Green Color Selectable

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 08.25





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-EXT-RG-WH-CMB-RC

Line Item#: 108  
[Go to Bill of Materials](#)


Type: EX/EM

Powered by 4submittal.com


**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## Emergency Exit Sign With Bug Eyes

### FEATURES

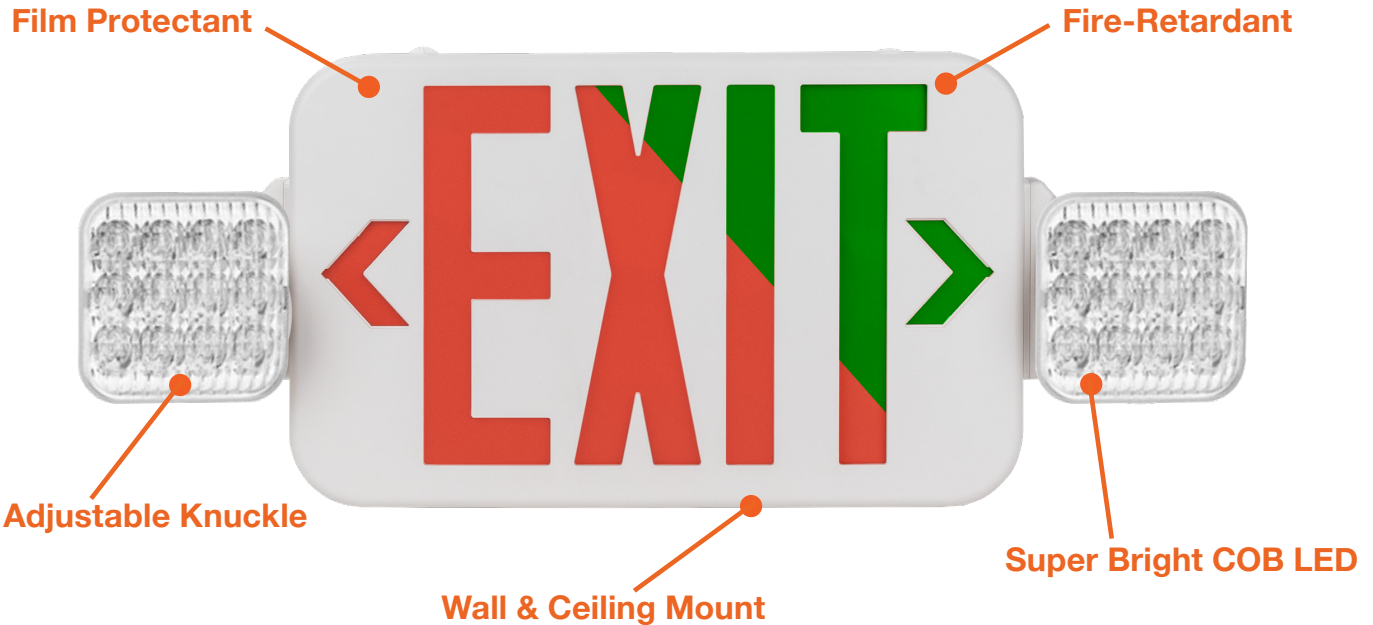


### DIMENSIONS

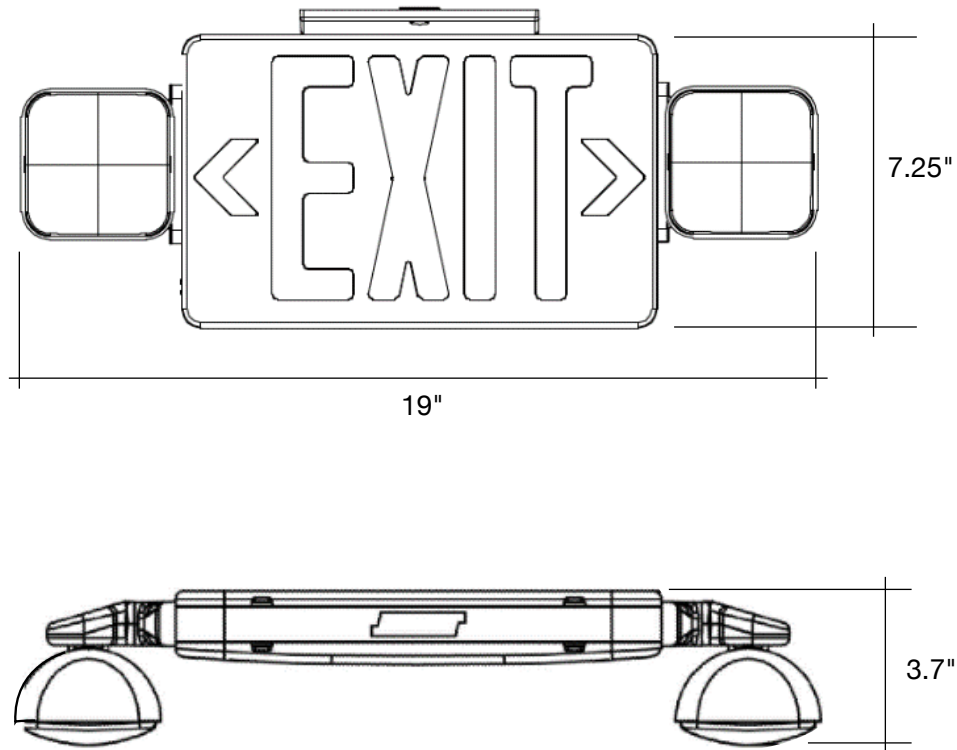

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

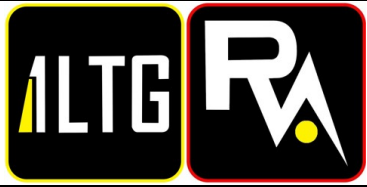

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-RC-1

Line Item#: 109  
[Go to Bill of Materials](#)

Type: RH1

Powered by 4submittal.com



Project: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_



## Single/Double Remote Head

### Product Information:

- Injection-Molded Thermoplastic ABS Housing
- 320 Lumens
- UL-940V-0 Flame Rating
- Wall and Ceiling Mounting
- Input Voltage: 3.6-24 VDC
- Super Bright SMD LED 2.4W
- IP Class: IP65
- Insulation: Class II
- Operating Temperature: 0°F ~ 104° F
- Remote Capable
- Compatible with but Not Limited to  
LED-EM-EXT-G-WH-CMB-RC  
or LED-EM-EXT-R-WH-CMB-R
- 5 Year Limited Warranty




**1 Product**  
LED-EM-RC Remote Head


**2 Head**  
Single 1  
Double 2

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)



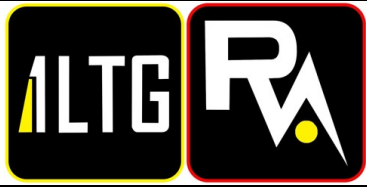

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-RC-1

Line Item#: 109  
[Go to Bill of Materials](#)

Type: RH1

Powered by 4submittal.com


**EnVisionLED™**

## Single/Double Remote Head

### FEATURES



### FEATURES

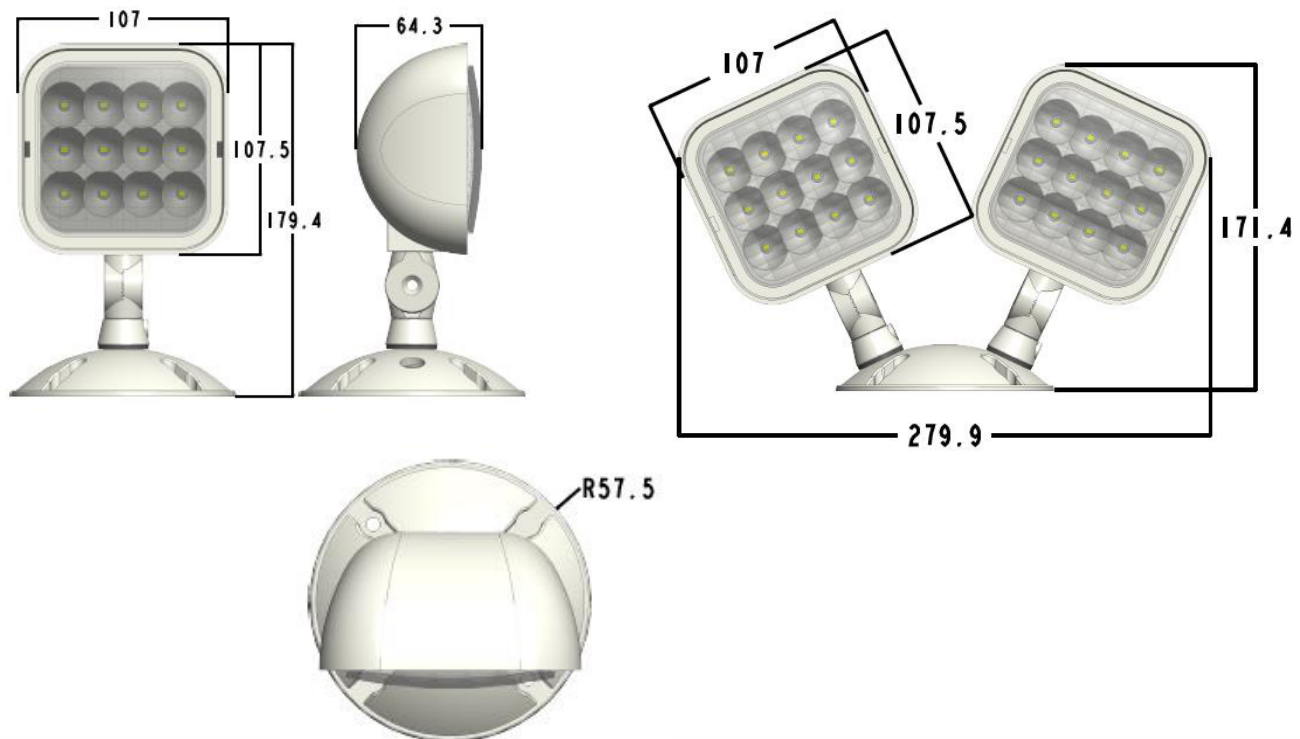


*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)



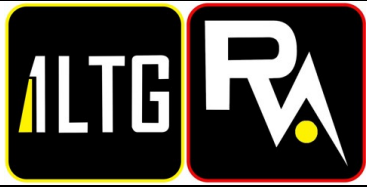

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 110  
[Go to Bill of Materials](#)

Type: SM1

Powered by 4submittal.com




LIGHTING | REINVENTED

plano **ARCH** PRO

## LDLL | Eclipse-II

Product Data Sheet

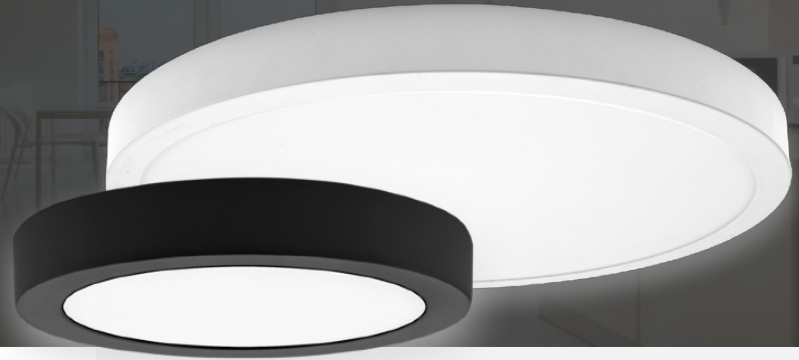

COMMERCIAL-GRADE

### LED Surface Mount Puck Downlight



CCTselect



TruColor Rendering

5" / 7" / 9" / 11" / 13"

#### Product Overview

**INTENDED USE** — The Eclipse-II Series is built for 5-way switchable CCT and is suitable for use in dry, damp, and wet locations, perfect for use in kitchens, hallways, stairways, bathrooms, closets, and just about anywhere you'd need it.

**CONSTRUCTION** — The die-cast aluminum housing is designed for durability and ruggedness.

**INSTALLATION** — Quick-mount aluminum backplate for easy installation.

**WARRANTY** — Featuring a no-compromise 5-year warranty, Energy Star and JA8-compliant, the Eclipse-II is a clean and modern solution for surface mounted driverless design.

ARCHIPELAGO luminaires and LED components undergo rigorous testing by an independent laboratory to meet IESNA LM-79 and LM-80 standards for light output and lumen maintenance. LED color temperature is warrantied to shift no more than 180K over the standard warranty period. Correlated Color Temperature (CCT) follows the guidelines set forth in the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

#### Applications



Residential



Hallway



Patio



Entryway

#### Main Features

- Low-Profile Edge-Lit Surface Mount Design
- Durable Di-Cast Aluminum Trim w/ Frosted Lens
- For New Construction or Retrofit Applications
- Suitable for Use in Dry, Damp and Wet Locations
- Suitable for Use in Closets, In Accordance to NEC Guidelines
- Installs on Ceiling and Standard Junction Boxes
- Dimmable to 10% on Compatible TRIAC Dimmers
- 5-Year, 50,000 Hr Warranty
- CEC T24 JA8 Compliant
- NEC Compliant, Suitable for Use in Closet
- Energy Star Certified for 5", 7", 9"

#### Product Warranty\*

5-Year Warranty



50,000 Hrs



\* Standard warranty. Extended warranty available.

Archipelago Lighting, Inc.

| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

[Contact Us](#)







Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 110  
[Go to Bill of Materials](#)

Type: SM1

Powered by 4submittal.com



LDLL | Eclipse-II

**Low-Glare Lens**  
Smooth diffused light output.

**Driverless**  
Minimizes installation height.

**IP54**  
Suitable for damp locations.

**Solid Backplate**  
Passive heat dissipation.

**Edge-Lit Technology**  
Even and uniform light distribution.

**PMMA Lens**  
Durable, no-yellowing lens.



#### Ordering Guide<sup>1</sup>

Model Series	Size (in) / Wattage (W)	Series	CCTselect (K)	Finish Color
<b>LDLL</b> LED Surface Mount Puck Downlight	<b>0510</b> 5inch / 10W <b>0715</b> 7inch / 15W <b>0918</b> 9inch / 18W <b>1121</b> 11inch / 21W <b>1324</b> 13inch / 24W	- <b>E2</b> Eclipse-II	<b>S5</b> 5-CCTselect: 2700K 3000K 3500K 4000K 5000K	/ <b>B</b> Black <b>W</b> White
<b>CATALOG #:</b>				
<b>LDLL</b>		- <b>E2</b>	<b>S5</b>	/

#### Options Guide<sup>2</sup>

EM Driver <sup>3</sup>	Motion Sensor
<input type="checkbox"/> <b>EM15</b> 15W EM Driver <input type="checkbox"/> <b>CRCU</b> 15W EM Driver with Junction Box	<input type="checkbox"/> <b>MSP/W</b> PIR Bi-Level Sensor for 7" and 9" ONLY (White Finish)
<b>OPTIONAL ACCESSORIES #:</b>	

NOTE:

1. Only one selection may be applicable within the same category.
2. Multiple selections may be applicable within the same option category. See Compatible Accessories below for details.
3. EM drivers only work with 7, 9, 11 and 13in fixtures

Archipelago Lighting, Inc.


| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

**Contact Us**

[www.archipelagolighting.com](http://www.archipelagolighting.com)






+1 (866) 912-3220

	Date: 1/12/2026	Description: LDLL0510-E2S5/W	Line Item#: 110
	Project: FINDLAY FLATS		<a href="#">Go to Bill of Materials</a>
			Type: SM1
Powered by 4submittal.com			



LDLL | Eclipse-II

Sizing & Measurements


Model Series	Dimensions	Overall Diameter (in)	Depth (IN)
LDLL0510-E2		5.51	0.79
LDLL0715-E2		7.48	0.82
LDLL0918-E2		8.86	0.79
LDLL1121-E2		10.98	0.98
LDLL1124-E2		12.80	0.98

Recommended Dimmers

Make	Models			
Lutron	TG-600PR-WH S-600PR-WH CTCL-153PDH-WH	TGCL-153PH-LA SLV-600P-AL DV-600PR-WH	SCL-153PH-WH GT-600P DVCL-153P	MSCL-OP153M MACL-153M//MA-R PD-6WCL
Leviton	6672 IPL06	6674	DSL06	RNL06

Accessories (Standard)

Accessories (Optional)



<b>Mounting Bracket</b>	<b>Wire Nuts</b>	<b>Bolts</b>	<b>15W EM Driver</b>	<b>PIR Bi-Level Sensor</b>
Compatible to 2.75" or 3.50" Junction Box			EM15-HMB/170DC CRCU-EM/JBM	LDLL-E2/MSP/W

Archipelago Lighting, Inc.

| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 110  
[Go to Bill of Materials](#)


Type: SM1


Powered by 4submittal.com



LDLL | Eclipse-II

EM Driver / J-Box (Optional)

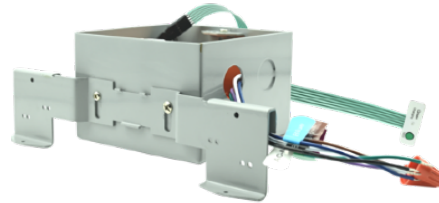

Technical Specification	CRCU-EM/JBM
Emergency Power	15W Max
Installation Method	Recessed
IP Rating	IP20
CEC T.24/JA8 Compliant	Yes
Color Finish	Grey
Physical Features	<ul style="list-style-type: none"><li>Directly connect to AC input</li><li>Fits 2.75" and 3.5" J-Box</li><li>Supports recessed in-ceiling mount</li></ul>
Self-Diagnostic Test Switch	<ol style="list-style-type: none"><li>Emergency conversion kit will go into emergency mode when test switch is pressed while main power is ON.</li><li>Will go into charging mode if test switch is not pressed.</li><li>In emergency mode, pressing the test switch for 3-seconds will inactivate emergency mode.</li></ol>
Indicator Status Light	<ol style="list-style-type: none"><li>Green ON: Charging mode / charging full</li><li>Green OFF: Mains power OFF / discharging mode</li></ol>
Dimension	W4.29in x H2.96 

Archipelago Lighting, Inc.


| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220

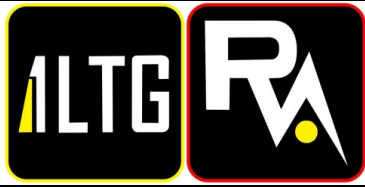

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 111  
[Go to Bill of Materials](#)

Type: SM2

Powered by 4submittal.com




LIGHTING | REINVENTED

plano **ARCH** PRO

## LDLL | Eclipse-II

Product Data Sheet

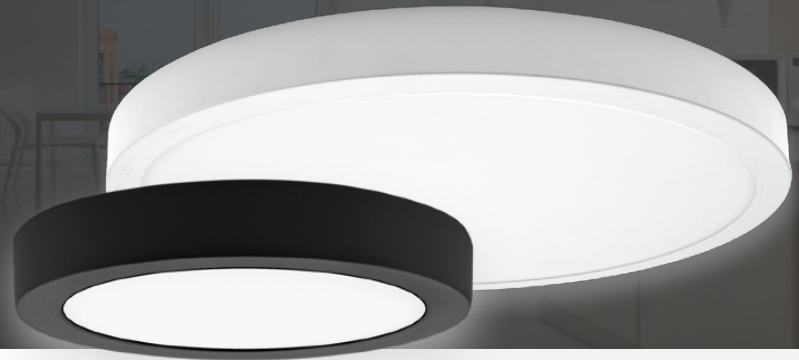

COMMERCIAL-GRADE

### LED Surface Mount Puck Downlight



CCTselect



TruColor Rendering

5" / 7" / 9" / 11" / 13"

#### Product Overview

**INTENDED USE** — The Eclipse-II Series is built for 5-way switchable CCT and is suitable for use in dry, damp, and wet locations, perfect for use in kitchens, hallways, stairways, bathrooms, closets, and just about anywhere you'd need it.

**CONSTRUCTION** — The die-cast aluminum housing is designed for durability and ruggedness.

**INSTALLATION** — Quick-mount aluminum backplate for easy installation.

**WARRANTY** — Featuring a no-compromise 5-year warranty, Energy Star and JA8-compliant, the Eclipse-II is a clean and modern solution for surface mounted driverless design.

ARCHIPELAGO luminaires and LED components undergo rigorous testing by an independent laboratory to meet IESNA LM-79 and LM-80 standards for light output and lumen maintenance. LED color temperature is warranted to shift no more than 180K over the standard warranty period. Correlated Color Temperature (CCT) follows the guidelines set forth in the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

#### Applications



Residential



Hallway



Patio



Entryway

#### Main Features

- Low-Profile Edge-Lit Surface Mount Design
- Durable Di-Cast Aluminum Trim w/ Frosted Lens
- For New Construction or Retrofit Applications
- Suitable for Use in Dry, Damp and Wet Locations
- Suitable for Use in Closets, In Accordance to NEC Guidelines
- Installs on Ceiling and Standard Junction Boxes
- Dimmable to 10% on Compatible TRIAC Dimmers
- 5-Year, 50,000 Hr Warranty
- CEC T24 JA8 Compliant
- NEC Compliant, Suitable for Use in Closet
- Energy Star Certified for 5", 7", 9"

#### Product Warranty\*

5-Year Warranty



50,000 Hrs



\* Standard warranty. Extended warranty available.

Archipelago Lighting, Inc.

| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

[Contact Us](#)





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 111  
[Go to Bill of Materials](#)

Type: SM2

Powered by 4submittal.com



LDLL | Eclipse-II

**Low-Glare Lens**  
Smooth diffused light output.

**Driverless**  
Minimizes installation height.

**IP54**  
Suitable for damp locations.

**Solid Backplate**  
Passive heat dissipation.

**Edge-Lit Technology**  
Even and uniform light distribution.

**PMMA Lens**  
Durable, no-yellowing lens.



#### Ordering Guide<sup>1</sup>

Model Series	Size (in) / Wattage (W)	Series	CCTselect (K)	Finish Color
<b>LDLL</b> LED Surface Mount Puck Downlight	<b>0510</b> 5inch / 10W <b>0715</b> 7inch / 15W <b>0918</b> 9inch / 18W <b>1121</b> 11inch / 21W <b>1324</b> 13inch / 24W	- <b>E2</b> Eclipse-II	<b>S5</b> 5-CCTselect: 2700K 3000K 3500K 4000K 5000K	/ <b>B</b> Black <b>W</b> White
<b>CATALOG #:</b>				
<b>LDLL</b>		- <b>E2</b>	<b>S5</b>	/

#### Options Guide<sup>2</sup>

EM Driver <sup>3</sup>	Motion Sensor
<input type="checkbox"/> <b>EM15</b> 15W EM Driver <input type="checkbox"/> <b>CRCU</b> 15W EM Driver with Junction Box	<input type="checkbox"/> <b>MSP/W</b> PIR Bi-Level Sensor for 7" and 9" ONLY (White Finish)
<b>OPTIONAL ACCESSORIES #:</b>	

**NOTE:**

- Only one selection may be applicable within the same category.
- Multiple selections may be applicable within the same option category. See Compatible Accessories below for details.
- EM drivers only work with 7, 9, 11 and 13in fixtures

#### Archipelago Lighting, Inc.


| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

#### Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)






+1 (866) 912-3220

	Date: 1/12/2026	Description: LDLL0510-E2S5/W	Line Item#: 111
	Project: FINDLAY FLATS		<a href="#">Go to Bill of Materials</a>
			Type: SM2
Powered by 4submittal.com			



LDLL | Eclipse-II

Sizing & Measurements


Model Series	Dimensions	Overall Diameter (in)	Depth (IN)
LDLL0510-E2		5.51	0.79
LDLL0715-E2		7.48	0.82
LDLL0918-E2		8.86	0.79
LDLL1121-E2		10.98	0.98
LDLL1124-E2		12.80	0.98

Recommended Dimmers

Make	Models			
Lutron	TG-600PR-WH S-600PR-WH CTCL-153PDH-WH	TGCL-153PH-LA SLV-600P-AL DV-600PR-WH	SCL-153PH-WH GT-600P DVCL-153P	MSCL-OP153M MACL-153M//MA-R PD-6WCL
Leviton	6672 IPL06	6674	DSL06	RNL06

Accessories (Standard)

Accessories (Optional)



<b>Mounting Bracket</b>	<b>Wire Nuts</b>	<b>Bolts</b>	<b>15W EM Driver</b>	<b>PIR Bi-Level Sensor</b>
Compatible to 2.75" or 3.50" Junction Box			EM15-HMB/170DC CRCU-EM/JBM	LDLL-E2/MSP/W

Archipelago Lighting, Inc.

| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 111  
[Go to Bill of Materials](#)


Type: SM2

Powered by 4submittal.com



LDLL | Eclipse-II

EM Driver / J-Box (Optional)

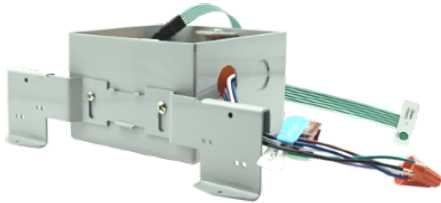

Technical Specification	CRCU-EM/JBM
Emergency Power	15W Max
Installation Method	Recessed
IP Rating	IP20
CEC T.24/JA8 Compliant	Yes
Color Finish	Grey
Physical Features	<ul style="list-style-type: none"><li>Directly connect to AC input</li><li>Fits 2.75" and 3.5" J-Box</li><li>Supports recessed in-ceiling mount</li></ul>
Self-Diagnostic Test Switch	<ol style="list-style-type: none"><li>Emergency conversion kit will go into emergency mode when test switch is pressed while main power is ON.</li><li>Will go into charging mode if test switch is not pressed.</li><li>In emergency mode, pressing the test switch for 3-seconds will inactivate emergency mode.</li></ol>
Indicator Status Light	<ol style="list-style-type: none"><li>Green ON: Charging mode / charging full</li><li>Green OFF: Mains power OFF / discharging mode</li></ol>
Dimension	<p>W4.29in x H2.96</p>

Archipelago Lighting, Inc.


| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220

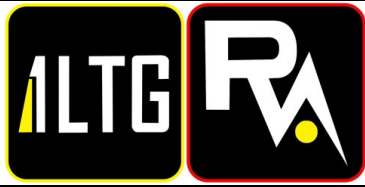

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 112  
[Go to Bill of Materials](#)

Type: SM3

Powered by 4submittal.com




LIGHTING | REINVENTED

plano **ARCH** PRO

## LDLL | Eclipse-II

Product Data Sheet

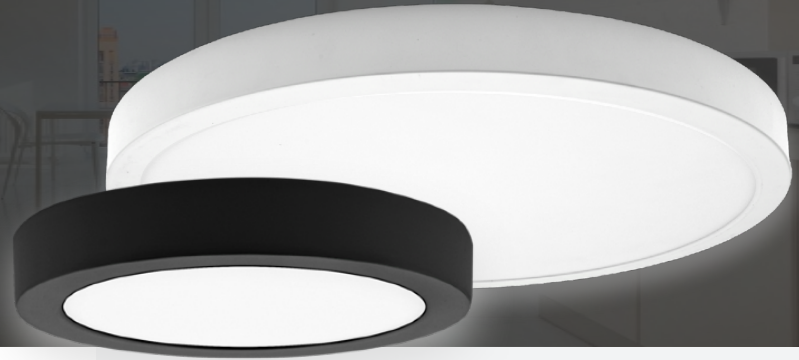

COMMERCIAL-GRADE

### LED Surface Mount Puck Downlight



CCTselect



TruColor Rendering

5" / 7" / 9" / 11" / 13"

#### Product Overview

**INTENDED USE** — The Eclipse-II Series is built for 5-way switchable CCT and is suitable for use in dry, damp, and wet locations, perfect for use in kitchens, hallways, stairways, bathrooms, closets, and just about anywhere you'd need it.

**CONSTRUCTION** — The die-cast aluminum housing is designed for durability and ruggedness.

**INSTALLATION** — Quick-mount aluminum backplate for easy installation.

**WARRANTY** — Featuring a no-compromise 5-year warranty, Energy Star and JA8-compliant, the Eclipse-II is a clean and modern solution for surface mounted driverless design.

ARCHIPELAGO luminaires and LED components undergo rigorous testing by an independent laboratory to meet IESNA LM-79 and LM-80 standards for light output and lumen maintenance. LED color temperature is warranted to shift no more than 180K over the standard warranty period. Correlated Color Temperature (CCT) follows the guidelines set forth in the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

#### Applications



Residential



Hallway



Patio



Entryway

#### Main Features

- Low-Profile Edge-Lit Surface Mount Design
- Durable Di-Cast Aluminum Trim w/ Frosted Lens
- For New Construction or Retrofit Applications
- Suitable for Use in Dry, Damp and Wet Locations
- Suitable for Use in Closets, In Accordance to NEC Guidelines
- Installs on Ceiling and Standard Junction Boxes
- Dimmable to 10% on Compatible TRIAC Dimmers
- 5-Year, 50,000 Hr Warranty
- CEC T24 JA8 Compliant
- NEC Compliant, Suitable for Use in Closet
- Energy Star Certified for 5", 7", 9"

#### Product Warranty\*

5-Year Warranty



50,000 Hrs



\* Standard warranty. Extended warranty available.

Archipelago Lighting, Inc.


| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

[Contact Us](#)





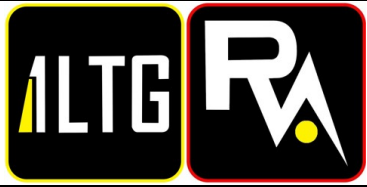

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 112  
[Go to Bill of Materials](#)

Type: SM3

Powered by 4submittal.com



LDLL | Eclipse-II

**Low-Glare Lens**  
Smooth diffused light output.

**Driverless**  
Minimizes installation height.

**IP54**  
Suitable for damp locations.

**Solid Backplate**  
Passive heat dissipation.

**Edge-Lit Technology**  
Even and uniform light distribution.

**PMMA Lens**  
Durable, no-yellowing lens.



#### Ordering Guide<sup>1</sup>

Model Series	Size (in) / Wattage (W)	Series	CCTselect (K)	Finish Color
<b>LDLL</b> LED Surface Mount Puck Downlight	<b>0510</b> 5inch / 10W <b>0715</b> 7inch / 15W <b>0918</b> 9inch / 18W <b>1121</b> 11inch / 21W <b>1324</b> 13inch / 24W	- <b>E2</b> Eclipse-II	<b>S5</b> 5-CCTselect: 2700K 3000K 3500K 4000K 5000K	/ <b>B</b> Black <b>W</b> White
<b>CATALOG #:</b>				
<b>LDLL</b>		- <b>E2</b>	<b>S5</b>	/

#### Options Guide<sup>2</sup>

EM Driver <sup>3</sup>	Motion Sensor
<input type="checkbox"/> <b>EM15</b> 15W EM Driver <input type="checkbox"/> <b>CRCU</b> 15W EM Driver with Junction Box	<input type="checkbox"/> <b>MSP/W</b> PIR Bi-Level Sensor for 7" and 9" ONLY (White Finish)
<b>OPTIONAL ACCESSORIES #:</b>	

**NOTE:**

- Only one selection may be applicable within the same category.
- Multiple selections may be applicable within the same option category. See Compatible Accessories below for details.
- EM drivers only work with 7, 9, 11 and 13in fixtures

#### Archipelago Lighting, Inc.


| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

#### Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)






+1 (866) 912-3220

	Date: 1/12/2026	Description: LDLL0510-E2S5/W	Line Item#: 112
	Project: FINDLAY FLATS		<a href="#">Go to Bill of Materials</a>
			Type: SM3
Powered by 4submittal.com			



LDLL | Eclipse-II

Sizing & Measurements


Model Series	Dimensions	Overall Diameter (in)	Depth (IN)
LDLL0510-E2		5.51	0.79
LDLL0715-E2		7.48	0.82
LDLL0918-E2		8.86	0.79
LDLL1121-E2		10.98	0.98
LDLL1124-E2		12.80	0.98

Recommended Dimmers

Make	Models			
Lutron	TG-600PR-WH S-600PR-WH CTCL-153PDH-WH	TGCL-153PH-LA SLV-600P-AL DV-600PR-WH	SCL-153PH-WH GT-600P DVCL-153P	MSCL-OP153M MACL-153M//MA-R PD-6WCL
Leviton	6672 IPL06	6674	DSL06	RNL06

Accessories (Standard)

Accessories (Optional)



<b>Mounting Bracket</b>	<b>Wire Nuts</b>	<b>Bolts</b>	<b>15W EM Driver</b>	<b>PIR Bi-Level Sensor</b>
Compatible to 2.75" or 3.50" Junction Box			EM15-HMB/170DC CRCU-EM/JBM	LDLL-E2/MSP/W



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 112  
[Go to Bill of Materials](#)


Type: SM3


Powered by 4submittal.com



LDLL | Eclipse-II

EM Driver / J-Box (Optional)

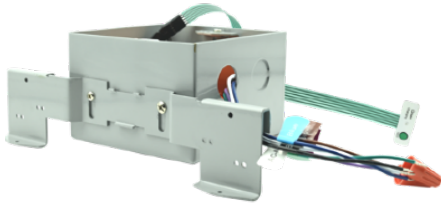

Technical Specification	CRCU-EM/JBM
Emergency Power	15W Max
Installation Method	Recessed
IP Rating	IP20
CEC T.24/JA8 Compliant	Yes
Color Finish	Grey
Physical Features	<ul style="list-style-type: none"><li>Directly connect to AC input</li><li>Fits 2.75" and 3.5" J-Box</li><li>Supports recessed in-ceiling mount</li></ul>
Self-Diagnostic Test Switch	<ol style="list-style-type: none"><li>Emergency conversion kit will go into emergency mode when test switch is pressed while main power is ON.</li><li>Will go into charging mode if test switch is not pressed.</li><li>In emergency mode, pressing the test switch for 3-seconds will inactivate emergency mode.</li></ol>
Indicator Status Light	<ol style="list-style-type: none"><li>Green ON: Charging mode / charging full</li><li>Green OFF: Mains power OFF / discharging mode</li></ol>
Dimension	<p>W4.29in x H2.96</p> 

Archipelago Lighting, Inc.


| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220

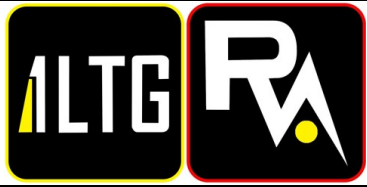

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
SM56885FTSN

Line Item#: 113  
[Go to Bill of Materials](#)

Type: SM13

Powered by 4submittal.com


Essentials - 588x | SM56885FTSN

Job Name: Job Type: Quantity: Comments:



#### PRODUCT DESCRIPTION

Maxim Lighting's commitment to both the residential lighting and the home building industries will assure you a product line focused on your lighting needs. With Maxim Lighting you will find quality product that is well designed, well priced and readily available.



#### MEASUREMENTS

DIMENSION : 9" L x 9" W x 5" H  
HANGING WEIGHT : 2.18 lb

#### LAMPING

INPUT VOLTAGE : 120V  
BULB : 60W Incandescent E26 Medium , 120W Total  
BULB INCLUDED : (Not Included)  
DIMMABLE : Yes

#### FINISHES OPTION

Oil Rubbed Bronze (OI)  
 Satin Nickel (SN)

#### GLASS

Frosted FT

#### MATERIAL

Glass, Steel

#### RATINGS

cETLus  
Damp Location



#### ADDITIONAL

OPERATING TEMPERATURE:  
-20°C (-4°F), 40°C (104°F)

Always consult a qualified electrician before installing any lighting product.

# STUDIO•M

Modifications or Customizations: Please email [contract@studiomlighting.com](mailto:contract@studiomlighting.com)

Sample Request: Please email [order@studiomlighting.com](mailto:order@studiomlighting.com) with subject line

"Sample Order, [Project Name] / [Specifier/Designer]"

All samples are subject to Studio M approval and must show proof of project and/or explanation.

Job Name:	Job Type:
Quantity:	Comments:

StudioMlighting.com - 1.626.956.4209



Date: 1/12/2026

Project:  
FINDLAY FLATSDescription:  
LED-A19-9W-5CCTLine Item#: 114  
[Go to Bill of Materials](#)

Type: SM13 LAMP

Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COMProject: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_



LED Bulbs

**A Bulb SERIES: 5-CCT LED BULBS**  
A-19, A-21

A-19



A-21

**Detail Specifications**

- IP Rating: Damp Location
- Beam Angle: 220°
- 5-CCT: 27/30/35/40/50K
- Chip: SMD 2835, R9 >50, CRI >90
- Operating Temperature: -4° - 114° F
- Average life (L70) of 25,000 hours

**Applications:**

- Decorative Lighting
- Interior Lighting
- Table & Floor Lamps
- Showcases
- Residential, Multi-Family, Commercial

**Product Information:**

- Suitable for use in existing fixtures
- Instant-On to full brightness

**Driver Options:**

- 120V
- Triac Dimmable
- PF >0.9, 50/60Hz

**Mounting & Installation:**

- E26 Socket
- Direct A Lamp Replacement

**Packaging:**

- All bulbs come in individual color boxes, but are sold in inner carton qty packs only

Carton Qty.	A-19	A-21
Inner Carton	10	10
Master Carton	100	100

**Certifications:**

- ETL Listed for USA and CA
- Energy Star
- Title 20 and JA8-2022 Approved
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

**Dimmer List:**

Leviton	6674
Lutron	LGCL-153P
Lutron	DVCL-153P
Lutron	CTCL-153P
Lutron	MAELV-300

**Series****LED-A19-9W-5CCT**

600 Lumens 60W Equivalent


**LED-A21-15W-5CCT**

1,600 Lumens 100W Equivalent

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 10.23

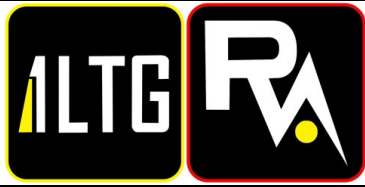

Date: 1/12/2026

Project:  
FINDLAY FLATSDescription:  
LED-CYE-UD-3-3P30-TRI-BL-PCLine Item#: 115  
[Go to Bill of Materials](#)

Type: WM1

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COMProject: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_

Area Lights



## M-Line: 3" Edge-Lit Cylinder Up/Down Light

### 3-CCT w/ Photocell



WATT	LUMENS
10	1,200
20	2,400
30	3,600

**Detail Specification:**

- Finish: Bronze, Black, White
- IP Rating: Wet Location IP65
- Beam Angle: 60°
- CCT: 30/40/50K Selectable
- Wattage: 30/20/10w
- Lumens: 3,600
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 122° F
- BUG: B2-U2-G2
- Lens: Clear glass with optics
- Average life (L70) of 50,000 hours

**Applications:**

- Dock and Loading
- Walkways & Pathways
- Parking Lots
- Hospitality, Multi-Family
- Outdoor Corridors
- General Outdoor Lighting
- Residential, Commercial and Industrial

**Product Information:**

- Sturdy die-cast aluminum housing finished with corrosion free powder coat
- Photocell included on each fixture. Easy disconnect.
- 1.5' STJW 18.3 AWG cable whip included
- Illuminates up and down and edge
- Select-n-Switch Technology: 3-CCT Selectable + 3-Power Selectable
- Instant-On to full brightness

**Driver Options:**

- UNV: 120-277V 0-10V Dimmable
- Built in 6Kv Surge Protector
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz

**Mounting & Installation:**

- Mounts to 3 or 4" J-box
- Covers a standard 4" recessed j-box

**Certifications:**

- UL Listed for USA and CA
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017


**Series****LED-CYE-UD-3-3P30-TRI -**  
3" Up/Down Cylinder • 30/20/10W**Finish****BZ**  
Bronze  
**WH**  
White  
**BL**  
Black**Photocell****- PC**Photocell  
is included.  
Easy quick  
disconnect.  
(PC-3/4-3PIN-LV)

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 10.23



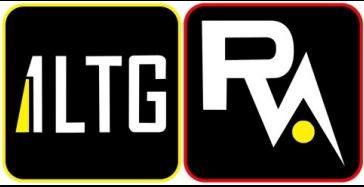

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-CYE-UD-3-3P30-TRI-BL-PC

Line Item#: 115  
[Go to Bill of Materials](#)

Type: WM1

Powered by 4submit.com


**EnVisionLED**<sup>TM</sup>  
WWW.ENVISIONLEDLIGHTING.COM

## M-Line: 3" Edge-Lit Cylinder Up/Down Light 3-CCT w/ Photocell

### FEATURES




### DIMENSIONS

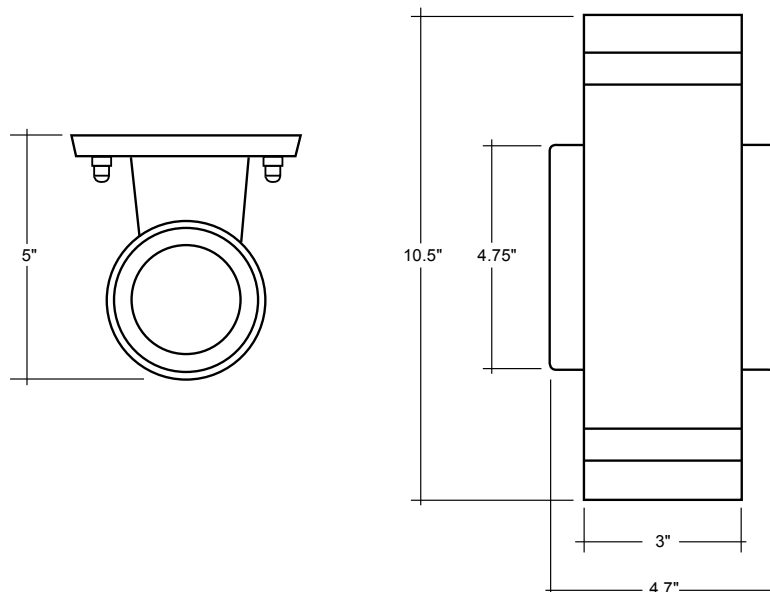

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

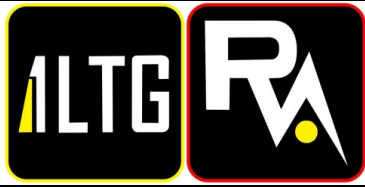

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-VT-ADJ-24-21W-5CCT-BN

Line Item#: 116  
[Go to Bill of Materials](#)


Type: V1

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## Vanity Fixtures

### Square Adjustable Swivel

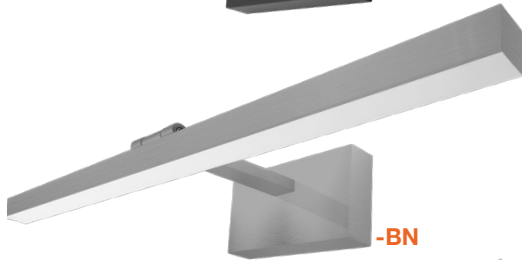

FRONT VIEW



90° Rotatable Angle

Vanity Fixture



#### Detail Specifications:

- Power: 21W
- Lumens: 2,700
- Finishes: Black, Brushed Nickel, Chrome
- IP Rating: IP54 Damp Location
- Beam Angle: 100°
- Chip: SMD 2835, R9 >50, CRI >90
- Operating Temperature: -40° - 114° F
- Lens: Frosted Acrylic, non-yellowing
- Average life (L70) of 50,000 hours

#### Applications:

- Bathrooms & Lavatories
- Hallways & Corridors
- Artwork, Museums
- Residential & Multifamily
- Education, Healthcare, Retail, Hospitality

#### Product Information:

- Available in 23.6" length
- Adjustable Angle: Lens swivels up and down
- Wide j-box for easier installation in retrofit and new construction applications
- Select-n-Switch Technology: 5-CCT Selectable

#### Driver Options:

- Triac & ELV dimmable down to 5%
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz
- Built in 2.5Kv Surge Protector
- Flicker Free

#### Mounting & Installations:

- 30/40 Junction Box
- Surface mount bracket included

#### Certifications:

- ETL Listed for USA and CA
- CA Title 24 JA8-2022 CEC Listed
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

#### Series

LED-VT-ADJ-24-21W-5CCT-BL

Black

LED-VT-ADJ-24-21W-5CCT-BN

Brushed Nickel

LED-VT-ADJ-24-21W-5CCT-CH


Chrome

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 04.25

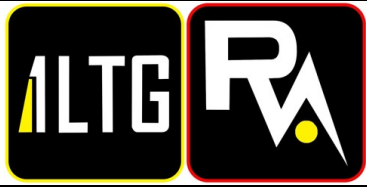

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-VT-ADJ-24-21W-5CCT-BN

Line Item#: 116  
[Go to Bill of Materials](#)

Type: V1

Powered by 4submit.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM


## Vanity Fixtures

### Square Adjustable Swivel

#### FEATURES




90° Rotatable Angle



5-CCT Selectable

#### MEASUREMENTS

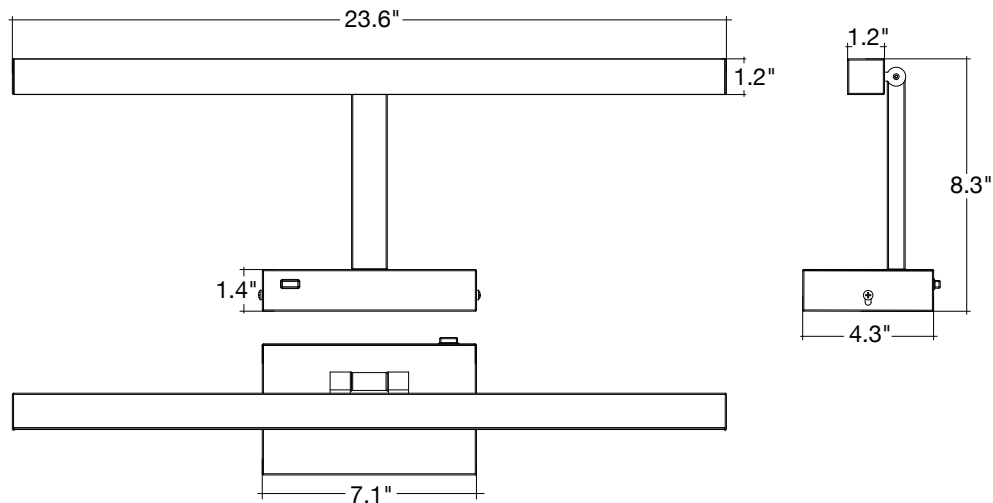

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)



Date: 1/12/2026

Project:  
FINDLAY FLATSDescription:  
LED-RST-4FT-3M40W-4CCT-SRLine Item#: 117  
[Go to Bill of Materials](#)

Type: ST1

Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Round LED Strip Fixtures

### 5-CCT & 3-Power Selectable

### Sensor Ready



3M25W		3M40W		3M60W		3M80W		3M100W	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
15	2,100	20	2,600	40	5,200	50	6,500	70	9,100
20	2,800	30	3,900	50	6,500	65	8,450	85	11,050
25	3,500	40	5,200	60	7,800	80	10,400	100	13,000

Project: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_

Strips

**Detail Specification:**

- Finish: White, Custom finishes available
- IP Rating: Damp Location (IP44)
- Beam Angle: 130°
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 122° F
- Lens: Round Acrylic Frosted Lens
- Average life (L70) of 50,000 hours

**Applications:**

- Stairwell & Hallways
- Utility & Storage
- Garage Structures
- Office and Meeting Rooms
- Shop Lighting
- Commercial and Industrial

**Product Information:**

- Aluminum housing finished with corrosion free power coat
- Easy j-box access: snap on and off tool-less design
- 40 J-box cover included with every fixture
- Audio Jack Sensor Ready (with RST-SR bracket)
- Sensor Options:
  - Standard Sensors
  - SILVAIR Bluetooth Mesh
  - ENVISIONLS Bluetooth
  - [Click Here](#) for More Information

**Driver Options:**

- UNV: 120-277V 0-10V Dimmable
- Optional 347-480V step down transformer available
- THD: <15% (+/-5% tolerance), PF >0.9, 50/60Hz
- 12V low voltage aux output for controls
- Flicker Free

**Mounting & Installation**

- Surface mount into 30 or 40 j-box
- Optional 10' & 20' suspension kit available
- Optional 6' chain mount available
- Rated for installation in closets

**Certifications**

- UL Listed for USA and CA
- DLC Premium Listed
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

Series	Sensor <sup>1</sup>	Emergency <sup>2</sup>	Finish <sup>3</sup>	Flex
LED-RST-2FT-3M25W-5CCT-SR	(Blank)	(Blank)	(Blank)	(Blank)
LED-RST-4FT-3M40W-5CCT-SR	No Sensor	No Emergency	White	No Flex
LED-RST-4FT-3M80W-5CCT-SR	BMS <sup>1</sup>	Backup	BL	6FLX
LED-RST-8FT-3M60W-5CCT-SR	Microwave	EMB	Black	6' Flex
LED-RST-8FT-3M100W-5CCT-SR	Bi-Level Motion	Emergency	GRY <sup>3</sup>	Whip
	+ Daylight Sensor	Backup	Gray	
	(Internal Sensor)	EMB20	BRZ <sup>3</sup>	
	BMSPIR	Emergency	Bronze	
	Available for field install.	Backup (20W)	CS <sup>3</sup>	
			Custom Color	

1. Sensor Note:  
Microwave: Detects motion through barriers such as walls, and doors. Ideal for applications where obstacles might obstruct the line of sight. Works effectively outdoors, in large open spaces, & parking lots. Do not use in areas of high vibrations or metal.  
PIR: Ideal for indoor environments with clear lines of sight to the area of interest. Detects warm objects, like a person or animal. Good for high vibration, areas of metal.

2. Standard emergency is 8W (1,040LM). 20W available, inquire factory

3. Standard quick ship finish is white & black. Other colors are custom finishes.

**Optional Accessories (Order Separately)**

Sensors	Suspension Kit	Accessories	Wire Guards
<b>RST-SR</b> Receptacle for Sensor (Required for below sensors)	<b>SK-10FT-Y-LC-PD</b> 10' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)	<b>RST-SM-CN</b> Surface mount linkable bracket	<b>RST-2FT-WG</b> 2ft Wire Guard
<b>S-AUD-PIR-1</b> PIR Bi-Level Motion + Daylight Sensor Remote Required: (S-LINE-R)	<b>SK-20FT-Y-LC-PD</b> 20' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)	<b>RST-PDM-CN</b> Pendant mount linkable bracket	<b>RST-4FT-WG</b> Wire Guard (order 2 for 8ft fixtures)
<b>S-AUD-PIR-BT</b> PIR ENVISIONLS Bluetooth Control			
<b>S-AUD-PIR-SL</b> PIR SILVAIR Bluetooth Mesh			

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 10.25



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-RST-4FT-3M40W-4CCT-SR

Line Item#: 117  
[Go to Bill of Materials](#)

Type: ST1


Powered by 4submittal.com




## Round LED Strip Fixtures


### 5-CCT & 3-Power Selectable

#### FEATURES

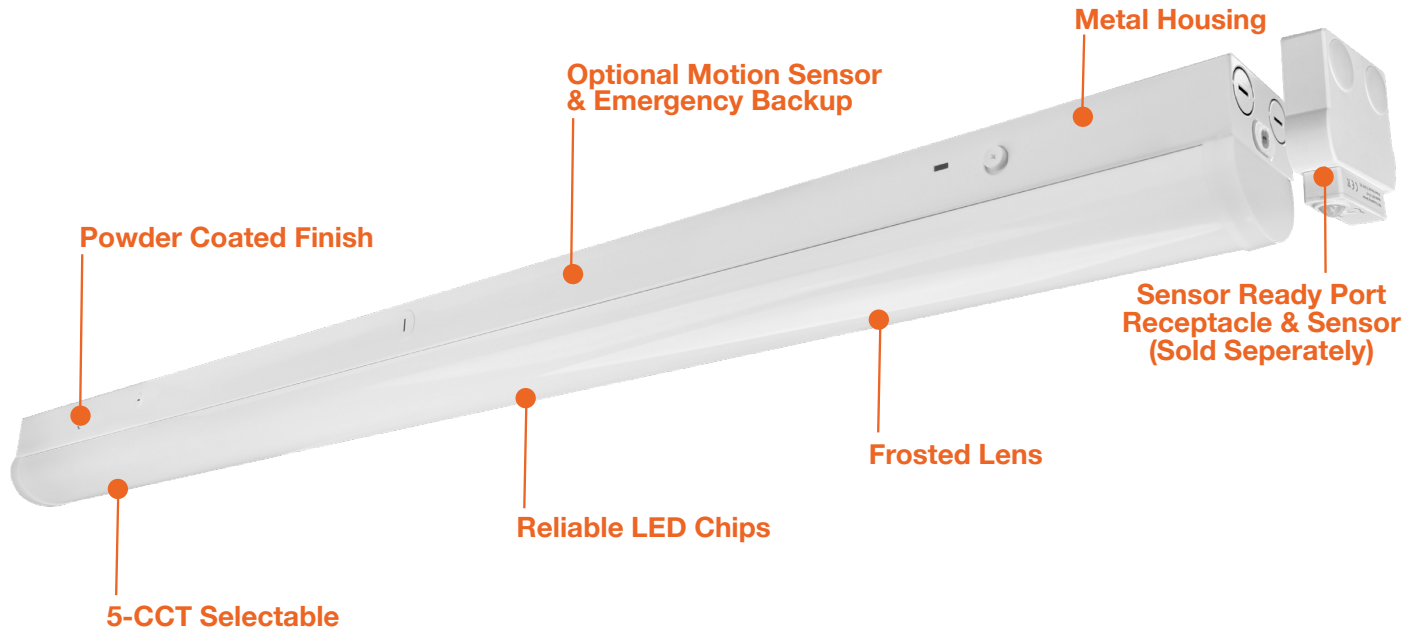

#### DIMENSIONS

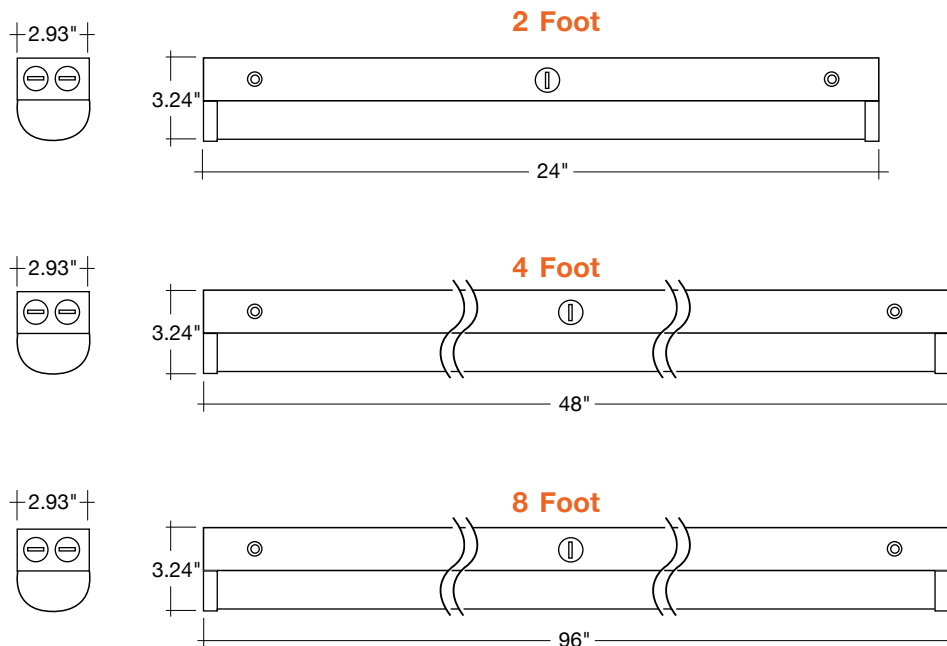

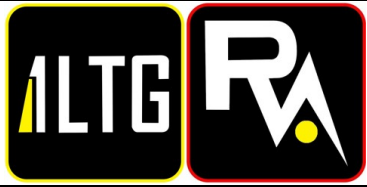

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-RST-4FT-3M40W-4CCT-SR

Line Item#: 117  
[Go to Bill of Materials](#)

Type: ST1

Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Round LED Strip Fixtures G3

### 4-CCT & 3-Power Selectable

#### ACCESSORIES



RST-SR



S-AUD-PIR-1  
S-AUD-PIR-BT  
S-AUD-PIR-SL



SK-10FT-Y-LC-PD  
SK-20FT-Y-LC-PD




RST-SM-CN




RST-PDM-CN




RST-2FT-WG  
RST-4FT-WG

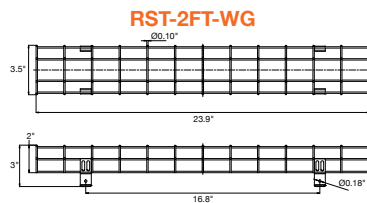

RST-2FT-WG

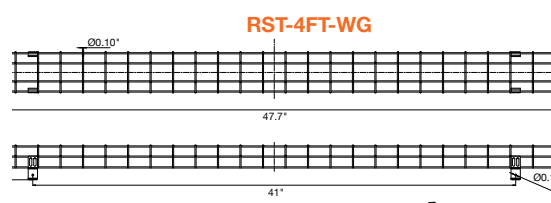

RST-4FT-WG



2-RST-4FT-WG FOR 8FT



Model	Voltage	Watts	Lumens	Color	CRI
LED-RST-2FT-3M25W-5CCT-SR	120-277V	25/20/15w	3,500/2,800/2,100	30/35/40/50/65k	>80
LED-RST-4FT-3M40W-5CCT-SR	120-277V	40/30/20w	5,200/3,900/2,600	30/35/40/50/65k	>80
LED-RST-4FT-3M80W-5CCT-SR	120-277V	80/65/50w	10,400/8,450/6,500	30/35/40/50/65k	>80
LED-RST-8FT-3M60W-5CCT-SR	120-277V	60/50/40w	7,800/6,500/5,200	30/35/40/50/65k	>80
LED-RST-8FT-3M100W-5CCT-SR	120-277V	100/85/70w	13,000/11,050/9,100	30/35/40/50/65k	>80

#### SENSORS

Pre-Installed Accessory Model	Description
RST-SR	Sensor Receptacle (REQUIRED)
S-AUD-PIR-1	PIR Bi-Level + Daylight: Audio Jack
S-AUD-PIR-BT	PIR Bi-Level + Daylight: Audio Jack Bluetooth EnVisionLS App
S-AUD-PIR-SL	PIR Bi-Level + Daylight: Audio Jack SILVAIR

#### SUSPENSION KIT


Model	Description
SK-10FT-Y-LC-PD	10' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)
SK-20FT-Y-LC-PD	20' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)

#### ACCESSORIES

Model	Description
RST-SM-CN	Surface Mount Linkable Bracket
RST-PDM-CN	Pendant Mount Linkable Bracket

#### WIRE GUARDS

Model	Description
RST-2FT-WG	2ft Wire Guard
RST-4FT-WG	4ft Wire Guard (order 2 for 8ft fixtures)

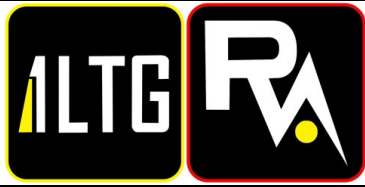

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-RST-4FT-3M40W-4CCT-SR









Line Item#: 117  
[Go to Bill of Materials](#)

Type: ST1

Powered by 4submittal.com


## EnVisionLED™ Control Options

EnVision LED offers 3 control systems compatible with our LED Fixtures for projects of all sizes and budgets.

	Basic Controls	EnVisionLS 	EnVisionLED™ x SILVAIR 
<b>Description</b>	Standard Plug In Sensors	Basic Bluetooth Wireless Control	Advanced Bluetooth Wireless Control
<b>Recommended Quantity</b> (but not limited to)	N/A	>40-50 Nodes	>50 Nodes
<b>Maximum Zone Quantity</b>	N/A	100	3,000
<b>Commissioning Tool</b>	Remote Only	  ENVISIONLS App 	  SILVAIR App 
<b>Commissioning Process</b>	Individually Set via Remote	Wireless Must be done on site	Wireless- Initial linking must be done on site. Commissioning can be done via desktop remotely.
<b>Floor Plan Upload</b>	N/A	N/A	Yes Add a floor plan and mark luminaires & zones via desktop
<b>Gateway</b>	N/A	N/A	Required only for energy monitoring, advanced scheduling, automated demand response.
<b>Individual Luminaire Control</b>	Yes	Yes	Yes
<b>Luminaire Grouping Zoning</b>	N/A	Yes	Yes
<b>High End Power Low End Power</b>	Yes but limited (View Remote)	Yes	Yes
<b>Cost</b>	\$	\$\$	\$\$\$
<b>DLC NLC Listed</b>	N/A	Yes	Yes
<b>Energy Monitoring &amp; Data Reporting</b>	N/A	N/A	Monitor energy usage per individual zone & retrofit cost savings calculation + detailed reporting





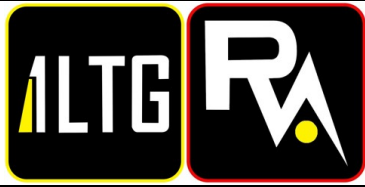

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-RST-4FT-3M40W-4CCT-SR

Line Item#: 117  
[Go to Bill of Materials](#)

Type: ST1

Powered by 4submittal.com





## Compatible Products:

EnVision offers a variety of nodes, sensors, & gateways that are controlled via remote, ENVISIONLS Bluetooth Mesh & SILVAIR Bluetooth Mesh on all of our 0-10V dimmable fixtures.






### Individual Fixture Controls: PIR Sensor, Bi-Level Dimming, Daylight


Basic Note: -1 • ENVISIONLS Models Note: -BT • SILVAIR Models Note: -SL

	MODEL #	DESIGN	RECOMMENDED FIXTURE	FEATURES
	S-TWC-PIR-1 S-TWC-PIR-BT S-TWC-PIR-SL	Twist-C Control Sensor	Sensor Ready Fixtures: Area Lights, Canopies, Flood Lights, High Bays	All models are equipped with PIR occupancy sensing, high & low end bi-level dimming, & daylight sensing.
	S-TWC-90 + S-TWC-PIR-1 S-TWC-90 + S-TWC-PIR-BT S-TWC-90 + S-TWC-PIR-SL	Twist-C Control Sensor + 90 Degree Arm	Cylinders, Strips, Wall Packs	
	S-AUD-PIR-1 S-AUD-PIR-BT S-AUD-PIR-SL	2.5m Audio Jack	Panels & Troffers	
	S-SN-PIR-1 S-SN-PIR-BT S-SN-PIR-SL	Snap In Sensor	Troffers & Wraps	

### Group Controls ENVISIONLS Models Note : -BT • SILVAIR Models Note: -SL

	MODEL #	DESIGN	VOLTAGE	FEATURES	RECOMMENDED FEATURES
	S-CM-PIR-LV-BT S-CM-PIR-LV-SL	Ceiling Mounted PIR Sensor	12-24V	PIR Sensor, Bi-Level Dimming, Daylight, 360° detection, 12' Max Mounting Height	Connects to 0-10V dimmable fixtures
	S-WM-PIR-CUNV-BT S-WM-PIR-CUNV-SL	Wall Mounted PIR Occupancy Sensor, Bi-Level Dimming, Daylight	120-277V	On/Off PIR occupancy sensor, 180° detection, 30' detection @ 4' Mounting Height	Connects to LED fixtures
	S-WS-120V-USB-SL		120V	Dimming Wall Socket, Two Sockets	Floor Lamps, Other Lamps

### Gateway (Silvaair Only) 4.5–5.5 V DC, 2A Power over Ethernet 36–57 V DC

	MODEL #	DESIGN	VOLTAGE	FEATURES	RECOMMENDED FEATURES
	SGW-102	Wall or Ceiling Mounted	POE	Advanced Energy Monitoring Control	Connects to Silvaair Controls. Gateway is not required.



Date: 1/12/2026

Project:  
FINDLAY FLATSDescription:  
LED-RST-4FT-3M40W-4CCT-SRLine Item#: 119  
[Go to Bill of Materials](#)

Type: ST1

Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Round LED Strip Fixtures

### 5-CCT & 3-Power Selectable

### Sensor Ready

Project: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_

Strips



#### Detail Specification:

- Finish: White, Custom finishes available
- IP Rating: Damp Location (IP44)
- Beam Angle: 130°
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 122° F
- Lens: Round Acrylic Frosted Lens
- Average life (L70) of 50,000 hours

#### Applications:

- Stairwell & Hallways
- Utility & Storage
- Garage Structures
- Office and Meeting Rooms
- Shop Lighting
- Commercial and Industrial

#### Product Information:

- Aluminum housing finished with corrosion free power coat
- Easy j-box access: snap on and off tool-less design
- 40 J-box cover included with every fixture
- Audio Jack Sensor Ready (with RST-SR bracket)
- Sensor Options:
  - Standard Sensors
  - SILVAIR Bluetooth Mesh
  - ENVISIONLS Bluetooth
  - [Click Here](#) for More Information

#### Driver Options:

- UNV: 120-277V 0-10V Dimmable
- Optional 347-480V step down transformer available
- THD: <15% (+/-5% tolerance), PF >0.9, 50/60Hz
- 12V low voltage aux output for controls
- Flicker Free

#### Mounting & Installation

- Surface mount into 30 or 40 j-box
- Optional 10' & 20' suspension kit available
- Optional 6' chain mount available
- Rated for installation in closets

#### Certifications

- UL Listed for USA and CA
- DLC Premium Listed
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

3M25W		3M40W		3M60W		3M80W		3M100W	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
15	2,100	20	2,600	40	5,200	50	6,500	70	9,100
20	2,800	30	3,900	50	6,500	65	8,450	85	11,050
25	3,500	40	5,200	60	7,800	80	10,400	100	13,000

Series	Sensor <sup>1</sup>	Emergency <sup>2</sup>	Finish <sup>3</sup>	Flex
LED-RST-2FT-3M25W-5CCT-SR	(Blank)	(Blank)	(Blank)	(Blank)
LED-RST-4FT-3M40W-5CCT-SR	No Sensor	No Emergency	White	No Flex
LED-RST-4FT-3M80W-5CCT-SR	BMS <sup>1</sup>	Backup	BL	6FLX
LED-RST-8FT-3M60W-5CCT-SR	Microwave	EMB	Black	6' Flex
LED-RST-8FT-3M100W-5CCT-SR	Bi-Level Motion	Emergency	GRY <sup>3</sup>	Whip
	+ Daylight Sensor	Backup	Gray	
	(Internal Sensor)	EMB20	BRZ <sup>3</sup>	
	BMSPIR	Emergency	Bronze	
	Available for field install.	Backup (20W)	CS <sup>3</sup>	
			Custom Color	

1. Sensor Note:  
Microwave: Detects motion through barriers such as walls, and doors. Ideal for applications where obstacles might obstruct the line of sight. Works effectively outdoors, in large open spaces, & parking lots. Do not use in areas of high vibrations or metal.  
PIR: Ideal for indoor environments with clear lines of sight to the area of interest. Detects warm objects, like a person or animal. Good for high vibration, areas of metal.

2. Standard emergency is 8W (1,040LM). 20W available, inquire factory

3. Standard quick ship finish is white & black. Other colors are custom finishes.


#### Optional Accessories (Order Separately)

Sensors	Suspension Kit	Accessories	Wire Guards
RST-SR Receptacle for Sensor (Required for below sensors)	SK-10FT-Y-LC-PD 10' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)	RST-SM-CN Surface mount linkable bracket	RST-2FT-WG 2ft Wire Guard
S-AUD-PIR-1 PIR Bi-Level Motion + Daylight Sensor Remote Required: (S-LINE-R)	SK-20FT-Y-LC-PD 20' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)	RST-PDM-CN Pendant mount linkable bracket	RST-4FT-WG Wire Guard (order 2 for 8ft fixtures)
S-AUD-PIR-BT PIR ENVISIONLS Bluetooth Control			
S-AUD-PIR-SL PIR SILVAIR Bluetooth Mesh			

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 10.25

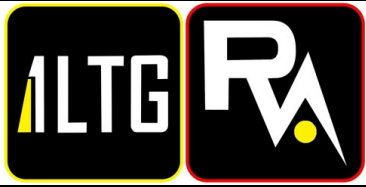

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-RST-4FT-3M40W-4CCT-SR

Line Item#: 119  
[Go to Bill of Materials](#)

Type: ST1


Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM


## Round LED Strip Fixtures


### 5-CCT & 3-Power Selectable

#### FEATURES

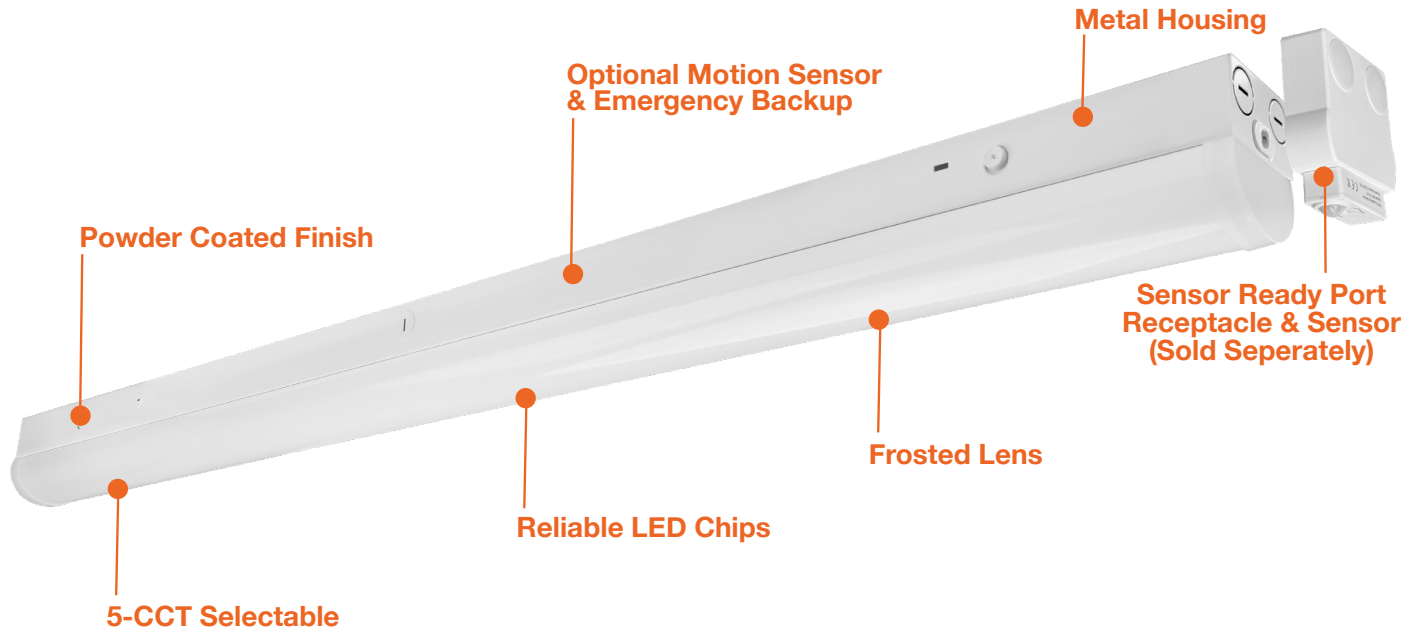

#### DIMENSIONS

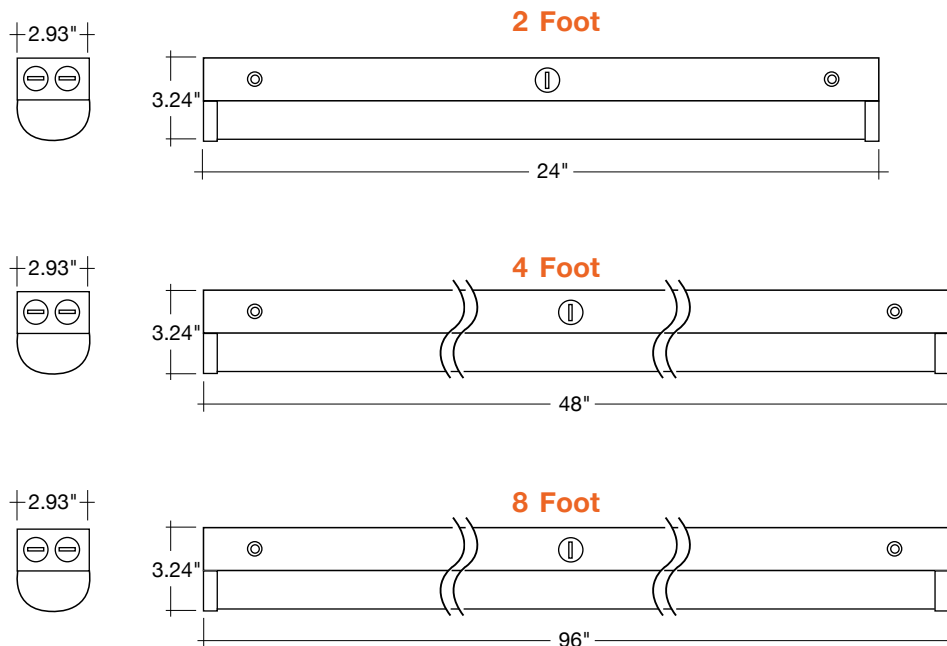

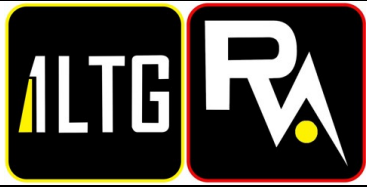

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-RST-4FT-3M40W-4CCT-SR

Line Item#: 119  
[Go to Bill of Materials](#)

Type: ST1

Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Round LED Strip Fixtures G3

### 4-CCT & 3-Power Selectable

#### ACCESSORIES



RST-SR



S-AUD-PIR-1  
S-AUD-PIR-BT  
S-AUD-PIR-SL



SK-10FT-Y-LC-PD  
SK-20FT-Y-LC-PD




RST-SM-CN




RST-PDM-CN




RST-2FT-WG  
RST-4FT-WG

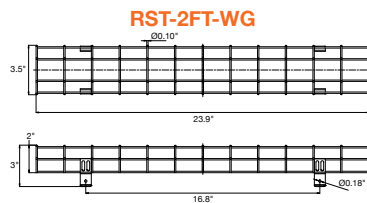

RST-2FT-WG

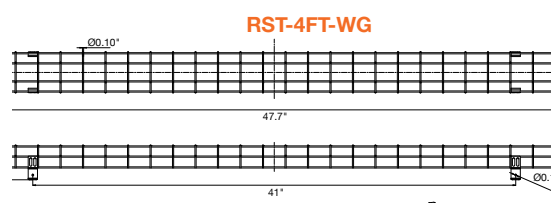

RST-4FT-WG



2-RST-4FT-WG FOR 8FT



Model	Voltage	Watts	Lumens	Color	CRI
LED-RST-2FT-3M25W-5CCT-SR	120-277V	25/20/15w	3,500/2,800/2,100	30/35/40/50/65k	>80
LED-RST-4FT-3M40W-5CCT-SR	120-277V	40/30/20w	5,200/3,900/2,600	30/35/40/50/65k	>80
LED-RST-4FT-3M80W-5CCT-SR	120-277V	80/65/50w	10,400/8,450/6,500	30/35/40/50/65k	>80
LED-RST-8FT-3M60W-5CCT-SR	120-277V	60/50/40w	7,800/6,500/5,200	30/35/40/50/65k	>80
LED-RST-8FT-3M100W-5CCT-SR	120-277V	100/85/70w	13,000/11,050/9,100	30/35/40/50/65k	>80

#### SENSORS

Pre-Installed Accessory Model	Description
RST-SR	Sensor Receptacle (REQUIRED)
S-AUD-PIR-1	PIR Bi-Level + Daylight: Audio Jack
S-AUD-PIR-BT	PIR Bi-Level + Daylight: Audio Jack Bluetooth EnVisionLS App
S-AUD-PIR-SL	PIR Bi-Level + Daylight: Audio Jack SILVAIR

#### SUSPENSION KIT


Model	Description
SK-10FT-Y-LC-PD	10' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)
SK-20FT-Y-LC-PD	20' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)

#### ACCESSORIES

Model	Description
RST-SM-CN	Surface Mount Linkable Bracket
RST-PDM-CN	Pendant Mount Linkable Bracket

#### WIRE GUARDS

Model	Description
RST-2FT-WG	2ft Wire Guard
RST-4FT-WG	4ft Wire Guard (order 2 for 8ft fixtures)

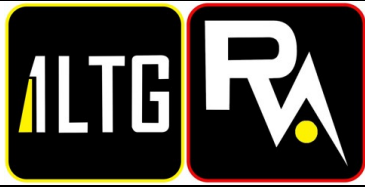

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-RST-4FT-3M40W-4CCT-SR









Line Item#: 119  
[Go to Bill of Materials](#)

Type: ST1

Powered by 4submittal.com

## EnVisionLED™ Control Options

EnVision LED offers 3 control systems compatible with our LED Fixtures for projects of all sizes and budgets.

	Basic Controls	EnVisionLS 	EnVisionLED™ x SILVAIR 
<b>Description</b>	Standard Plug In Sensors	Basic Bluetooth Wireless Control	Advanced Bluetooth Wireless Control
<b>Recommended Quantity</b> (but not limited to)	N/A	>40-50 Nodes	>50 Nodes
<b>Maximum Zone Quantity</b>	N/A	100	3,000
<b>Commissioning Tool</b>	Remote Only	  ENVISIONLS App 	  SILVAIR App 
<b>Commissioning Process</b>	Individually Set via Remote	Wireless Must be done on site	Wireless- Initial linking must be done on site. Commissioning can be done via desktop remotely.
<b>Floor Plan Upload</b>	N/A	N/A	Yes Add a floor plan and mark luminaires & zones via desktop
<b>Gateway</b>	N/A	N/A	Required only for energy monitoring, advanced scheduling, automated demand response.
<b>Individual Luminaire Control</b>	Yes	Yes	Yes
<b>Luminaire Grouping Zoning</b>	N/A	Yes	Yes
<b>High End Power Low End Power</b>	Yes but limited (View Remote)	Yes	Yes
<b>Cost</b>	\$	\$\$	\$\$\$
<b>DLC NLC Listed</b>	N/A	Yes	Yes
<b>Energy Monitoring &amp; Data Reporting</b>	N/A	N/A	Monitor energy usage per individual zone & retrofit cost savings calculation + detailed reporting





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-RST-4FT-3M40W-4CCT-SR

Line Item#: 119  
[Go to Bill of Materials](#)

Type: ST1

Powered by 4submittal.com





## Compatible Products:

EnVision offers a variety of nodes, sensors, & gateways that are controlled via remote, ENVISIONLS Bluetooth Mesh & SILVAIR Bluetooth Mesh on all of our 0-10V dimmable fixtures.






### Individual Fixture Controls: PIR Sensor, Bi-Level Dimming, Daylight


Basic Note: -1 • ENVISIONLS Models Note: -BT • SILVAIR Models Note: -SL

	MODEL #	DESIGN	RECOMMENDED FIXTURE	FEATURES
	S-TWC-PIR-1 S-TWC-PIR-BT S-TWC-PIR-SL	Twist-C Control Sensor	Sensor Ready Fixtures: Area Lights, Canopies, Flood Lights, High Bays	All models are equipped with PIR occupancy sensing, high & low end bi-level dimming, & daylight sensing.
	S-TWC-90 + S-TWC-PIR-1 S-TWC-90 + S-TWC-PIR-BT S-TWC-90 + S-TWC-PIR-SL	Twist-C Control Sensor + 90 Degree Arm	Cylinders, Strips, Wall Packs	
	S-AUD-PIR-1 S-AUD-PIR-BT S-AUD-PIR-SL	2.5m Audio Jack	Panels & Troffers	
	S-SN-PIR-1 S-SN-PIR-BT S-SN-PIR-SL	Snap In Sensor	Troffers & Wraps	

### Group Controls ENVISIONLS Models Note : -BT • SILVAIR Models Note: -SL

	MODEL #	DESIGN	VOLTAGE	FEATURES	RECOMMENDED FEATURES
	S-CM-PIR-LV-BT S-CM-PIR-LV-SL	Ceiling Mounted PIR Sensor	12-24V	PIR Sensor, Bi-Level Dimming, Daylight, 360° detection, 12' Max Mounting Height	Connects to 0-10V dimmable fixtures
	S-WM-PIR-CUNV-BT S-WM-PIR-CUNV-SL	Wall Mounted PIR Occupancy Sensor, Bi-Level Dimming, Daylight	120-277V	On/Off PIR occupancy sensor, 180° detection, 30' detection @ 4' Mounting Height	Connects to LED fixtures
	S-WS-120V-USB-SL		120V	Dimming Wall Socket, Two Sockets	Floor Lamps, Other Lamps

### Gateway (Silvaire Only) 4.5–5.5 V DC, 2A Power over Ethernet 36–57 V DC

	MODEL #	DESIGN	VOLTAGE	FEATURES	RECOMMENDED FEATURES
	SGW-102	Wall or Ceiling Mounted	POE	Advanced Energy Monitoring Control	Connects to Silvaire Controls. Gateway is not required.





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-EXT-RG-WH-CMB-RC

Line Item#: 120  
[Go to Bill of Materials](#)

Type: EX/EM

Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Emergency Exit Sign With Bug Eyes



Emergency Exit Signs



### Detail Specifications:

- Finish: White Finish
- IP Rating: IP20, Dry Location
- Wattage: 3.5W
- Lumens: 140
- Operating Temperature: 32°F to 104°F
- Lens: Red or Green
- Remoted Capable
- Compatible with: LED-EM-RC-1, LED-EM-RC-2
- Average life (L70) of 50,000 hours

### Applications:

- Exit Doors
- Corridor Intersections
- Exit Stairways
- Exit Ramps

### Product Information:

- Built-in test switch and charge indicator
- Injection-molded thermoplastic housing, PC cover
- Backup Time: >90 minutes
- Recharge time: 24 hours
- Single Face
- 6" height letters with 3/4" stroke, viewable from 100ft away

### Driver Options:

- Dual Voltage 120/277V
- PF >0.9, 50/60Hz

### Mounting & Installations:

- Wall and ceiling mounted
- Universal J-box mounting pattern

### Certifications:

- UL Listed for USA and CA (UL94V-0 Flame Rating)
- Meets UL924, NDPA 101
- Approved for CA T24
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

### REMOTE HEAD OPTIONS

LED-EM-RC-1

LED-EM-RC-2

Series

**LED-EM-EXT-RG-WH-CMB-RC**

Red/Green Color Selectable

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 08.25





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-EXT-RG-WH-CMB-RC

Line Item#: 120  
[Go to Bill of Materials](#)


Type: EX/EM

Powered by 4submit.com


**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## Emergency Exit Sign With Bug Eyes

### FEATURES

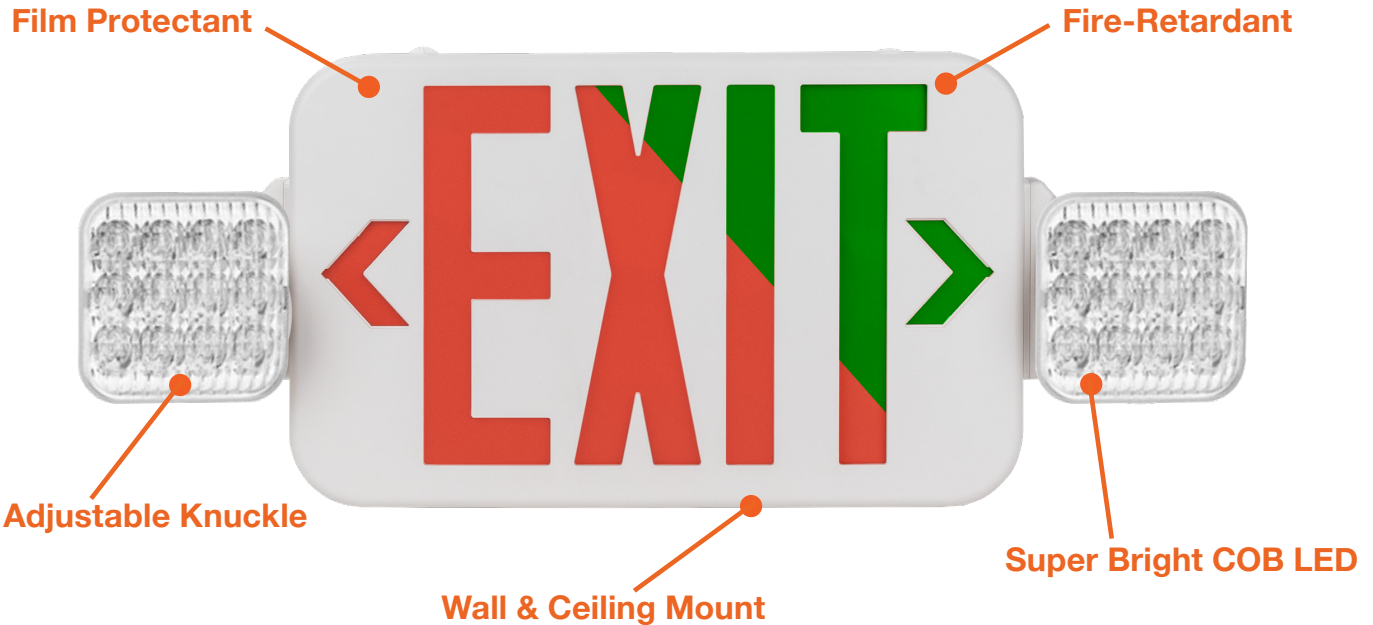


### DIMENSIONS

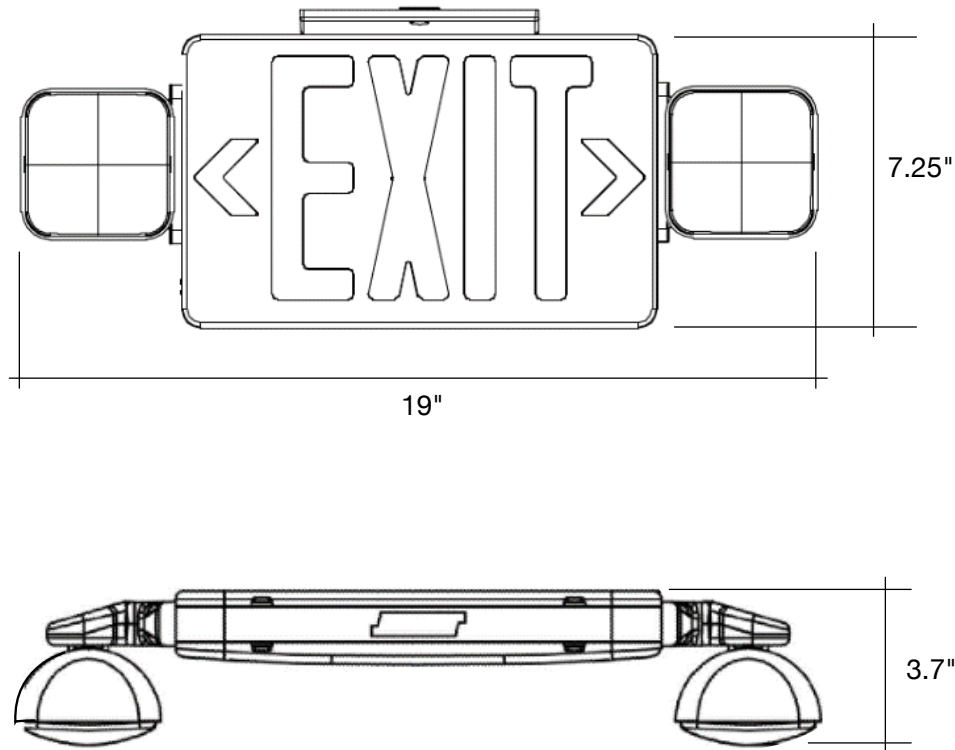

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

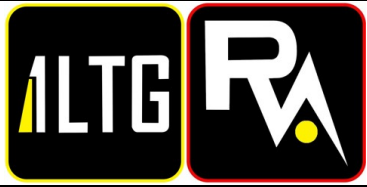

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-DH-HO

Line Item#: 121  
[Go to Bill of Materials](#)

Type: EM

Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Emergency Bug Eyes Square Models



Emergency



### Detail Specifications:

- Finish: White
- IP Rating: Dry Location
- Lumen Options
  - Standard: 3W 140LM
  - High Output: 6W 650LM
- Operating Temperature: -40° - 104° F
- Average life (L70) of 50,000 hours

### Applications:

- Exit Doors
- Corridor Intersections
- Exit Stairways
- Exit ramps

### Product Information:

- Built-in test switch and charge indicator light
- Overcharge and over-discharge protection
- Injection-molded thermoplastic housing, PC cover
- Backup Time: >90 minutes
- Recharge time: 24 hours

### Driver Options:

- Dual Voltage 120/277V
- PF >0.9, 50/60Hz
- Nickel Cadmium Battery 3.6V
- This fixture is non-dimmable

### Mounting & Installation:

- Wall and ceiling mounted
- Universal J-box mounting pattern

### Certifications:

- UL Listed for USA and CA (UL94V-0 Flame Rating)
- Meets UL924, NDPA 101
- Approved for CA T24
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

#### Series

**LED-EM-DH**

3W • 140Lm

**LED-EM-DH-HO**


6W • 650Lm

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 01.24

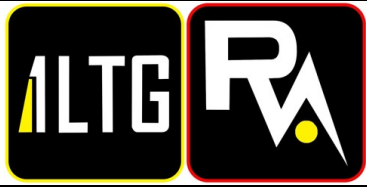

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-DH-HO

Line Item#: 121  
[Go to Bill of Materials](#)


Type: EM

Powered by 4submittal.com


**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Emergency Bug Eyes Square Models

### FEATURES

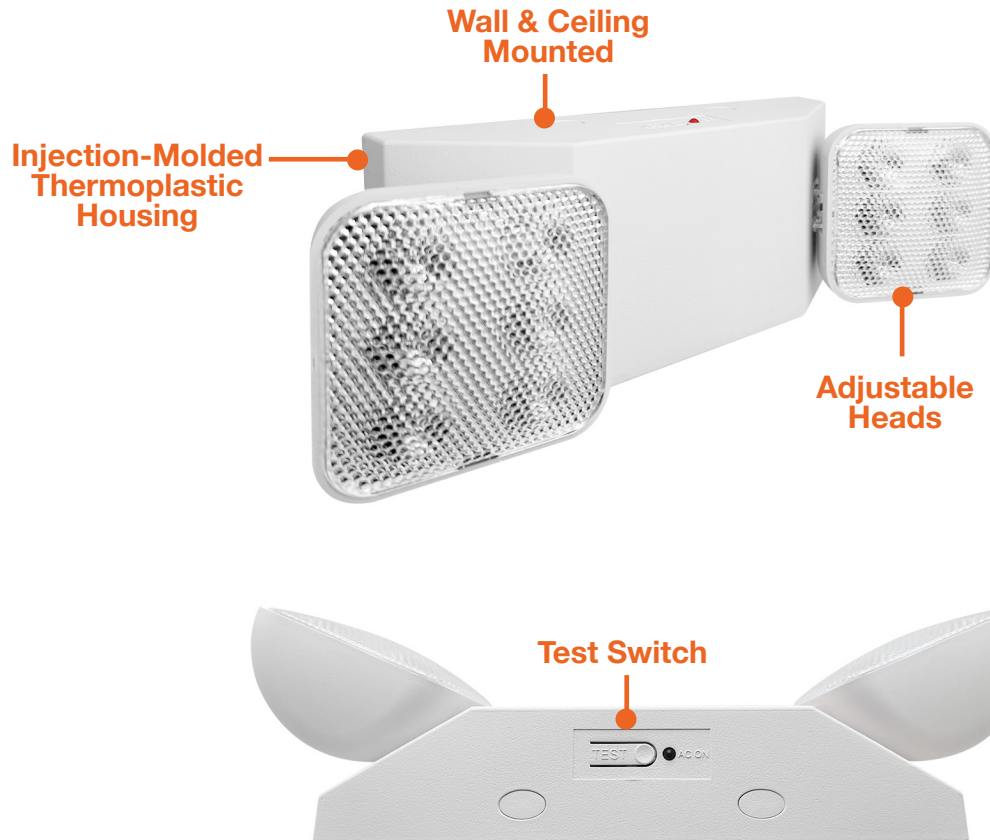


### DIMENSIONS

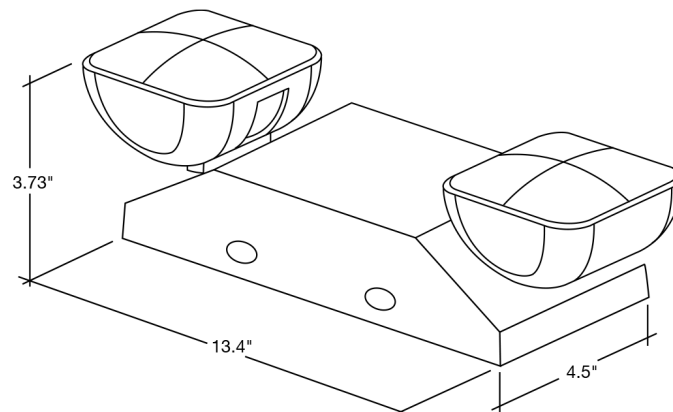

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

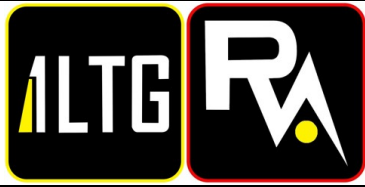

Date: 1/12/2026

Project:  
FINDLAY FLATSDescription:  
LED-CYE-UD-3-3P30-TRI-BL-PCLine Item#: 122  
[Go to Bill of Materials](#)

Type: WM1

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COMProject: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_

Area Lights



## M-Line: 3" Edge-Lit Cylinder Up/Down Light

### 3-CCT w/ Photocell



WATT	LUMENS
10	1,200
20	2,400
30	3,600

**Detail Specification:**

- Finish: Bronze, Black, White
- IP Rating: Wet Location IP65
- Beam Angle: 60°
- CCT: 30/40/50K Selectable
- Wattage: 30/20/10w
- Lumens: 3,600
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 122° F
- BUG: B2-U2-G2
- Lens: Clear glass with optics
- Average life (L70) of 50,000 hours

**Applications:**

- Dock and Loading
- Walkways & Pathways
- Parking Lots
- Hospitality, Multi-Family
- Outdoor Corridors
- General Outdoor Lighting
- Residential, Commercial and Industrial

**Product Information:**

- Sturdy die-cast aluminum housing finished with corrosion free powder coat
- Photocell included on each fixture. Easy disconnect.
- 1.5' STJW 18.3 AWG cable whip included
- Illuminates up and down and edge
- Select-n-Switch Technology: 3-CCT Selectable + 3-Power Selectable
- Instant-On to full brightness

**Driver Options:**

- UNV: 120-277V 0-10V Dimmable
- Built in 6Kv Surge Protector
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz

**Mounting & Installation:**

- Mounts to 3 or 4" J-box
- Covers a standard 4" recessed j-box

**Certifications:**


- UL Listed for USA and CA
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

**Series****LED-CYE-UD-3-3P30-TRI -**  
3" Up/Down Cylinder • 30/20/10W**Finish****BZ**  
Bronze  
**WH**  
White  
**BL**  
Black**Photocell****PC**  
Photocell  
is included.  
Easy quick  
disconnect.  
(PC-3/4-3PIN-LV)

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 10.23

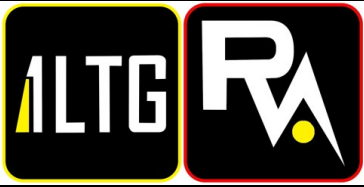

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-CYE-UD-3-3P30-TRI-BL-PC

Line Item#: 122  
[Go to Bill of Materials](#)

Type: WM1

Powered by 4submittal.com


**EnVisionLED**<sup>TM</sup>  
WWW.ENVISIONLEDLIGHTING.COM

## M-Line: 3" Edge-Lit Cylinder Up/Down Light 3-CCT w/ Photocell

### FEATURES




### DIMENSIONS

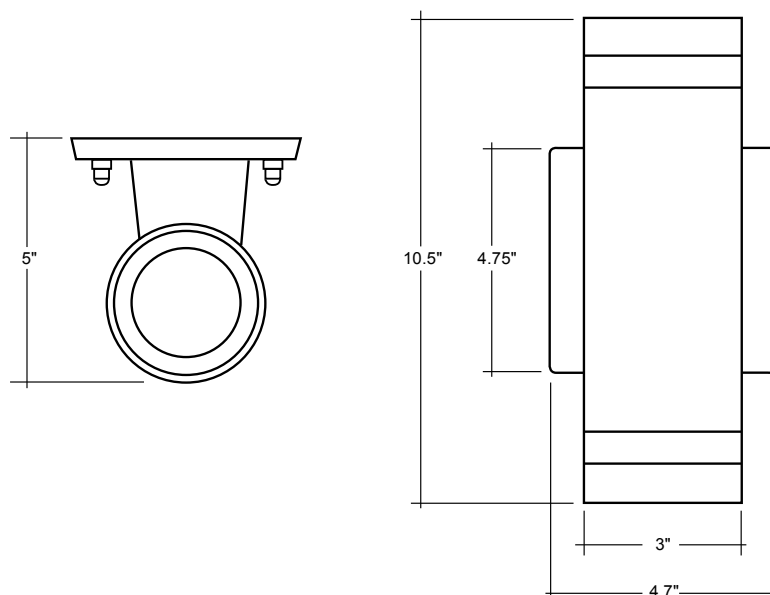

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

	Date: 1/12/2026	Description: SM160116BK	Line Item#: 123
	Project: FINDLAY FLATS		<a href="#">Go to Bill of Materials</a>
			Type: WM5
Powered by 4submittal.com			

Signlite | SM160116BK

Job Name:

Job Type:


Quantity:

Comments:



PRODUCT DESCRIPTION

This classic design was originally used to illuminate signs but now is used as a nostalgic wall washer in residential and commercial applications. The polycarbonate shade is supported by an aluminum arm for maximum durability at a very affordable price.



\*height from center of outlet to the top of the fixture

MEASUREMENTS

DIMENSION	: 7.5" W x 13.75" H x 20.5" Ext
BACK PLATE	: 5" W x 5" H x 2.5" HCO
HANGING WEIGHT	: 1.17 lb
LAMPING	
INPUT VOLTAGE	: 120V
BULB	: 60W Incandescent E26 Medium , 60W Total
BULB INCLUDED	: (Not Included)
DIMMABLE	: Yes
LIGHTING_DIRECTION	: Down

FINISHES OPTION

- Black (BK)

MATERIAL

Polycarbonate, Aluminum

RATINGS

cETLus  
Wet Location



ADDITIONAL

INSTALL UP/DOWN: Down  
OPERATING TEMPERATURE:  
-20°C (-4°F), 40°C (104°F)


Always consult a qualified electrician before installing any lighting product.

STUDIO•M

**Modifications or Customizations:** Please email [contract@studiomlighting.com](mailto:contract@studiomlighting.com)  
**Sample Request:** Please email [order@studiomlighting.com](mailto:order@studiomlighting.com) with subject line "Sample Order\_ [Project Name] / [Specifier/Designer]"  
 All samples are subject to Studio M approval and must show proof of project and/or explanation.

Job Name:	Job Type:
Quantity:	Comments:



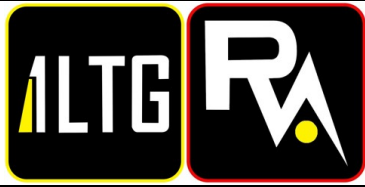

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-FLM-A19-8.5W-30K-D-JA8

Line Item#: 124  
[Go to Bill of Materials](#)


Type: WM5 LAMP

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## A-19 Bulb Filament Series

LED Bulbs

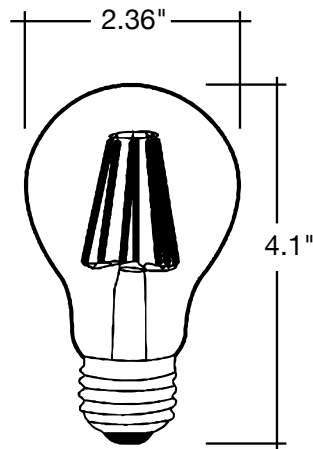

### Detail Specifications

- IP Rating: Damp Location
- Beam Angle: Omni-Directional 360°
- Chip: Filament, R9- 78, CRI >90
- Operating Temperature: -4° - 114° F
- Average life (L70) of 25,000 hours

### Applications:

- Decorative Lighting
- Interior Lighting
- Table & Floor Lamps
- Showcases
- Residential, Multi-Family, Commercial

### Product Information:

- Suitable for use in existing fixtures
- Instant-On to full brightness

### Driver Options:

- 120V
- Triac Dimmable
- PF >0.9, 50/60Hz

### Mounting & Installation:

- E26 Socket
- Direct A Lamp Replacement

### Certifications:

- UL Listed for USA and CA
- Energy Star
- Title 20 and JA8-2022 Approved (8.5W Model Only)
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

### Dimmer List:

Leviton	6674
Lutron	LGCL-153P
Lutron	DVCL-153P
Lutron	CTCL-153P
Lutron	MAELV-300

### Series

**LED-FLM-A19-8.5W-30K-D-JA8**

550 Lumens 60W Equivalent

**LED-FLM-A19-10W-27K**

1,000 Lumens 100W Equivalent

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 10.23





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-RC-1

Line Item#: 125  
[Go to Bill of Materials](#)

Type: RH1

Powered by 4submittal.com



Project: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_



## Single/Double Remote Head

### Product Information:

- Injection-Molded Thermoplastic ABS Housing
- 320 Lumens
- UL-940V-0 Flame Rating
- Wall and Ceiling Mounting
- Input Voltage: 3.6-24 VDC
- Super Bright SMD LED 2.4W
- IP Class: IP65
- Insulation: Class II
- Operating Temperature: 0°F ~ 104° F
- Remote Capable
- Compatible with but Not Limited to  
LED-EM-EXT-G-WH-CMB-RC  
or LED-EM-EXT-R-WH-CMB-R
- 5 Year Limited Warranty



#### 1 Product

LED-EM-RC Remote Head


#### 2 Head


Single 1  
Double 2

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)



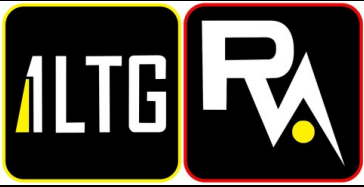

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-RC-1

Line Item#: 125  
[Go to Bill of Materials](#)

Type: RH1

Powered by 4submittal.com




## Single/Double Remote Head

### FEATURES



### FEATURES

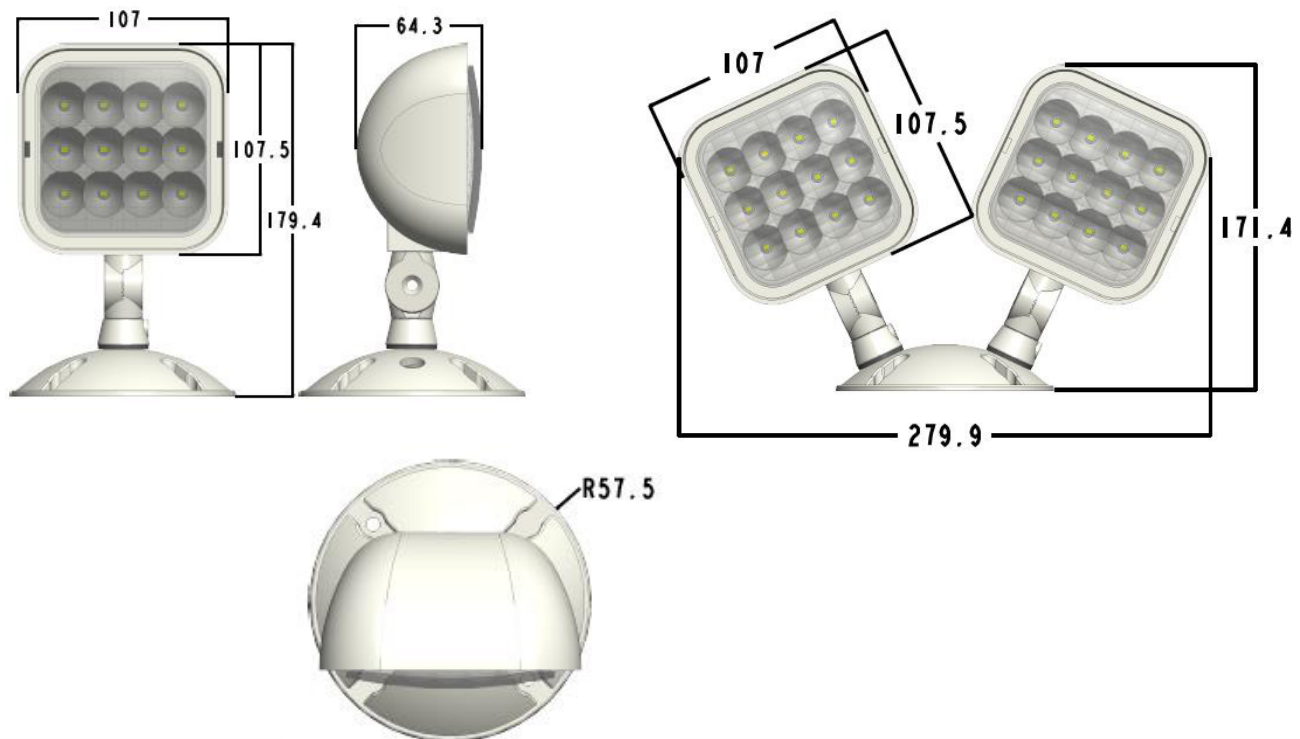

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)





Date: 1/12/2026

Project:  
FINDLAY FLATSDescription:  
LED-BPL-2X2-3M40-5CCTLine Item#: 126  
[Go to Bill of Materials](#)


Type: SM8

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## LED Panels: BackLit Line

### 5-CCT & 3-Power Selectable

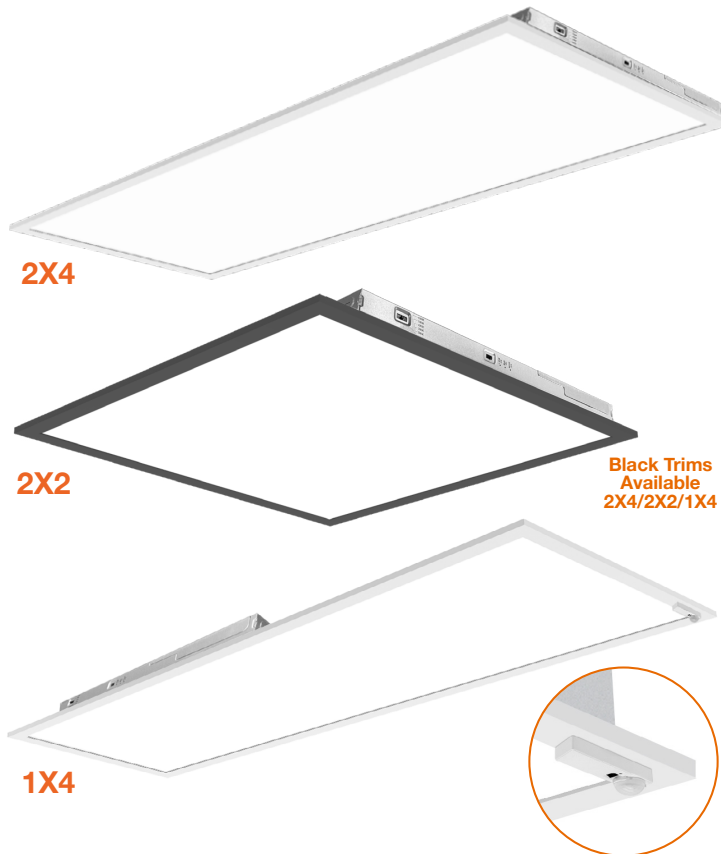Black Trims  
Available  
2X4/2X2/1X4Shown with  
Sensor Option**Regular Versions**

WATT	LUMENS
20	2,200
30	3,300
40	4,400
50	5,500

**HL Versions**

WATT	LUMENS
30	3,750
40	5,000
45	5,625
50	6,250
55	6,875
65	8,125

**Detail Specifications:**

- Finish: White, Custom finishes available
- IP Rating: Damp Location (IP44)
- 5CCT: 30/35/40/50/65K
- Beam Angle: 110°
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 114° F
- Lens: PS (polystyrene) frosted, non-yellowing, & shatter resistant
- Average life (L70) of 50,000 hours
- IC Rated

**Applications:**

- General Indoor Lighting
- Utility & Storage
- Garage Structures
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality
- Commercial and Industrial

**Product Information:**

- Metal housing finished with corrosion free power coat
- Even light distribution
- Lightweight for easier installation
- Select-n-Switch Technology: 5-CCT + 3-Power Selectable
- Control Options:
  - Standard Sensors
  - SILVAIR Bluetooth Mesh
  - ENVISIONLS Bluetooth
  - [Click Here](#) for More Information

**Driver Options:**

- UNV: 120-277V 0-10V Dimmable (Dim to Off)
- Optional 347-480V step down transformer available
- Standard EMB used:
  - 40W: 8W EMB ([LED-EMB-8W-HV-0-10V-2P](#))
  - 50W: 15W EMB ([LED-EMB-15W-HV-0-10V-2P](#))
- Higher wattage emb (up to 25W) available by request. Pricing will vary.
- THD: <15% (+/-5% tolerance), PF >0.9, 50/60Hz
- Isolated Driver
- Flicker Free

**Mounting & Installations:**

- Lay-in ceilings for 5/8" and 3/8" ceiling widths
- Built-in earthquake clips
- Optional 9' suspension kit available
- Optional surface mount, drywall kit available
- Use surface mount and suspension kit for an aesthetically pleasing design

**Certifications:**

- ETL Listed for USA and CA
- DLC Listed/ DLC Premium Listed (HL Versions)
  - View DLC ID Chart below
- NSF Rated
- Approved for CA T24
- 5 Year Limited Warranty

Series	Sensor	Emergency	Driver <sup>1</sup>	Whip
LED-BPL-2X2-3M40-5CCT	(blank)	(blank)	(blank)	(blank)
20/30/40W	No Sensor	No	120-277V	No Whip
LED-BPL-2X2-3M50-5CCT-HL	SR	Emergency	HV	-6FLX
30/40/50W	Sensor Ready	Emergency	347-480V	6' Flex
LED-BPL-2X4-3M50-5CCT	(See sensor options)	Emergency Backup	Stepdown	
30/40/50W				
LED-BPL-2X4-3M65-5CCT-HL				
45/55/65W				
LED-BPL-1X4-3M40-5CCT				
20/30/40W				

1. HV: High voltage is made to order.

**Optional Accessories (Order Separately)**


Sensors	Suspension Kits	Surface Mount Kits	Drywall Kits	Color Trims
<b>S-AUD-PIR-1</b>	<b>SK-10FT-Y-LC-CB</b>	<b>2X2-SM-3"</b>	<b>LED-PNL-2X2-FLNG</b>	<b>BPL-2X2-TRIM-BL</b>
PIR Bi-Level	10' Suspension Kit	3" Height		
Motion + Daylight	<b>SK-20FT-Y-LC-CB</b>	<b>2X4-SM-3"</b>	<b>LED-PNL-2X4-FLNG</b>	<b>2x2 Black Trim</b>
Sensor Remote	20' Suspension Kit	3" Height		
Required:	<b>CK-6FT-V</b>	<b>1X4-SM-3"</b>	<b>LED-PNL-1X4-FLNG</b>	<b>2x4 Black Trim</b>
(S-LINE-R)	6' Chain Hanging Kit	3" Height		<b>BPL-1X4-TRIM-BL</b>
<b>S-AUD-PIR-BT</b>				<b>1x4 Black Trim</b>
PIR ENVISIONLS				
Bluetooth Control				
<b>S-AUD-PIR-SL</b>				
PIR SILVAIR				
Bluetooth Mesh				

1. Custom height options available. Contact us.

Specs and model numbers are subject to change with or without notice. Customization of product is available.

**EnVision LED Lighting, Inc.**6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 12.24

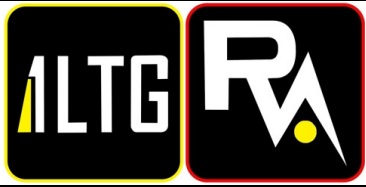

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-BPL-2X2-3M40-5CCT

Line Item#: 126  
[Go to Bill of Materials](#)

Type: SM8


Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM


## LED Panels: BackLit Line


### 5-CCT & 3-Power Selectable

#### FEATURES

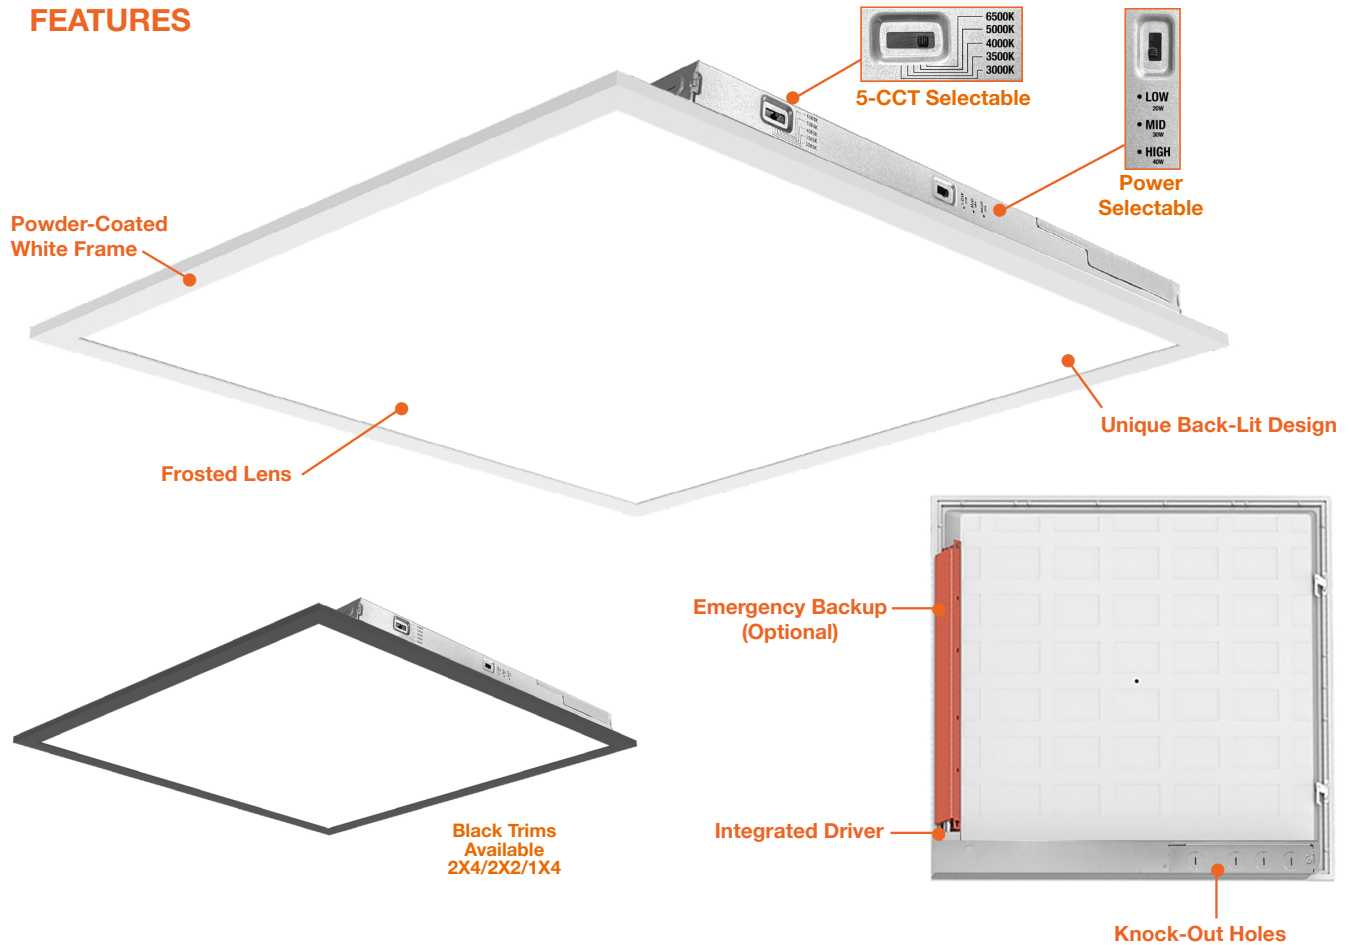

#### DIMENSIONS

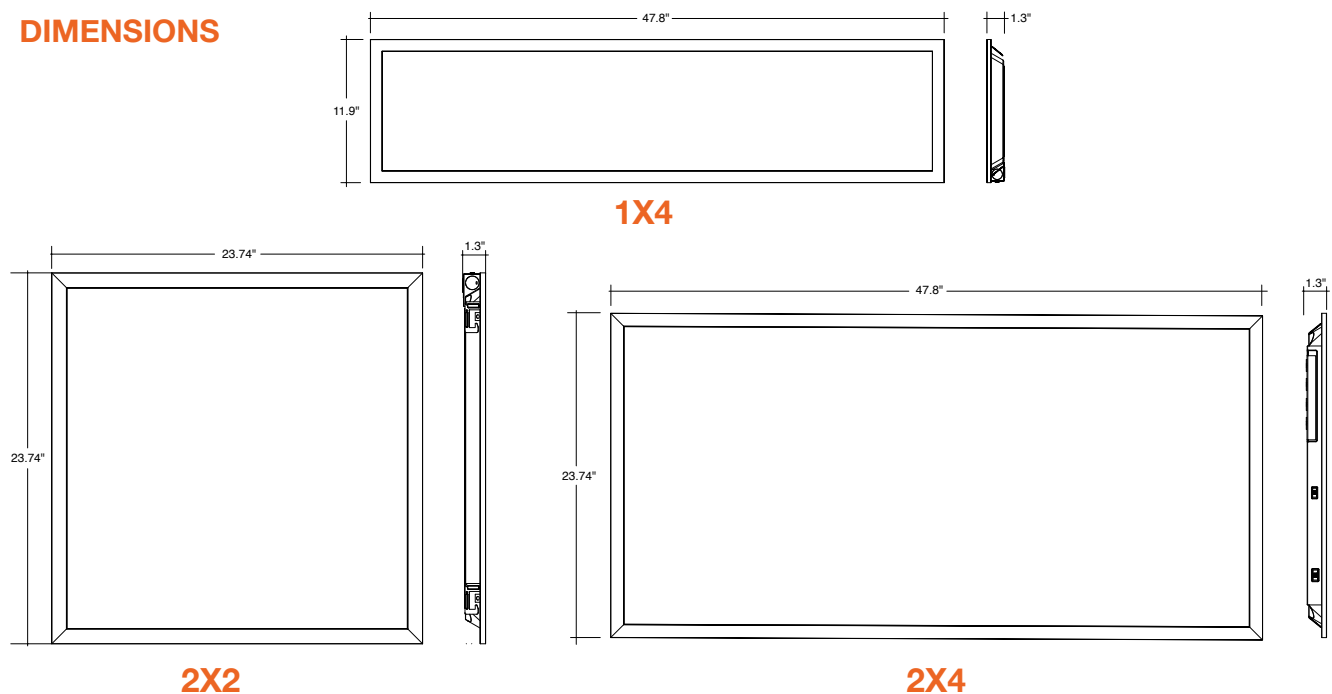

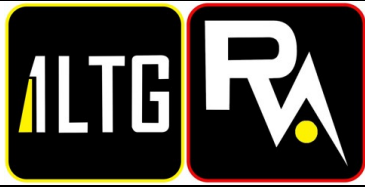

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-BPL-2X2-3M40-5CCT

Line Item#: 126  
[Go to Bill of Materials](#)

Type: SM8

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## LED Panels: BackLit Line 5-CCT & 3-Power Selectable

### ACCESSORIES




SK-10FT-Y-LC-CB  
SK-20FT-Y-LC-CB



CK-6FT-V




S-AUD-PIR-1  
S-AUD-PIR-BT  
S-AUD-PIR-SL

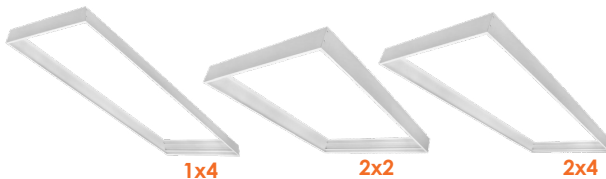

1x4

2x2

2x4

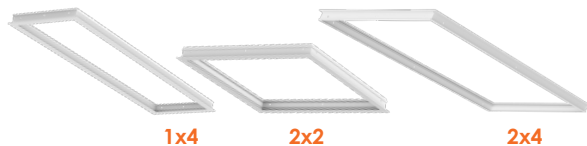

1x4

2x2

2x4



2x2



1x4



2x4

Model	Voltage	Watts	Lumens	Color	CRI
LED-BPL-2X2-3M40-5CCT	120/277V	20/30/40w	2600/3900/4400	30/35/40/50/65k	>80
LED-BPL-2X2-3M50-5CCT-HL	120/277V	30/40/50w	3900/4400/5500	30/35/40/50/65k	>80
LED-BPL-2X4-3M50-5CCT	120/277V	30/40/50w	3900/4400/5500	30/35/40/50/65k	>80
LED-BPL-2X4-3M65-5CCT-HL	120/277V	45/55/65w	5625/6875/8125	30/35/40/50/65k	>80
LED-BPL-1X4-3M40-5CCT	120/277V	20/30/40w	2600/3900/4400	30/35/40/50/65k	>80

### SUSPENSION KITS

Accessory	Description
SK-10FT-Y-LC-CB	10' Suspension Kit
SK-20FT-Y-LC-CB	20' Suspension Kit
CK-6FT-V	6' Chain Hanging Kit
LED-PNL-2X4-SK	3.5' Suspension Kit, works for all sizes

### SENSORS

Accessory Model	Description
S-AUD-PIR-1	PIR Bi-Level Motion + Daylight Sensor Remote Required: (S-LINE-R)
S-AUD-PIR-BT	PIR ENVISIONLS Bluetooth Control
S-AUD-PIR-SL	PIR SILVAIR Bluetooth Mesh

### SURFACE MOUNT KITS

Accessory	Description
2X2-SM-3"	2X2 Surface Mount Kit 3" Height for all Panels and Troffers
2X4-SM-3"	2X4 Surface Mount Kit 3" Height for all Panels and Troffers
1X4-SM-3"	1X4 Surface Mount Kit 3" Height for all Panels and Troffers

### DRYWALL KITS

Accessory	Description
LED-PNL-2X2-FLNG	Flange (Drywall) Kit for Panels for all 2X2 Fixtures
LED-PNL-2X4-FLNG	Flange (Drywall) Kit for Panels for all 2X4 Fixtures
LED-PNL-1X4-FLNG	Flange (Drywall) Kit for Panels for all 1X4 Fixtures

### TRIMS

Accessory	Description
BPL-2X2-TRIM-BL	2x2 LED Panel: Backlit-Line Black Trim
BPL-1X4-TRIM-BL	1x4 LED Panel: Backlit-Line Black Trim
BPL-2X4-TRIM-BL	2x4 LED Panel: Backlit-Line Black Trim


Luminaires for Ambient Lighting of - DLC Product ID:

LED-BPL-2x2-3M40-5CCT	S-IMBE52 (Standard)
LED-BPL-2x4-3M50-5CC	S-U0267J (Standard)
LED-BPL-1x4-3M40-5CCT	S-DR8V2E (Standard)
LED-BPL-2x2-3M50-5CCT-HL	S-V26054 (Standard)
LED-BPL-2x4-3M65-5CCT-HL	S-WNV8KG (Premium)

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)



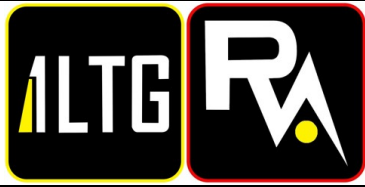

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-BPL-2X2-3M40-5CCT









Line Item#: 126  
[Go to Bill of Materials](#)

Type: SM8

Powered by 4submittal.com

## EnVisionLED™ Control Options

EnVision LED offers 3 control systems compatible with our LED Fixtures for projects of all sizes and budgets.

	Basic Controls	EnVisionLS 	EnVisionLED™ x SILVAIR 
<b>Description</b>	Standard Plug In Sensors	Basic Bluetooth Wireless Control	Advanced Bluetooth Wireless Control
<b>Recommended Quantity</b> (but not limited to)	N/A	>40-50 Nodes	>50 Nodes
<b>Maximum Zone Quantity</b>	N/A	100	3,000
<b>Commissioning Tool</b>	Remote Only	  ENVISIONLS App 	  SILVAIR App 
<b>Commissioning Process</b>	Individually Set via Remote	Wireless Must be done on site	Wireless- Initial linking must be done on site. Commissioning can be done via desktop remotely.
<b>Floor Plan Upload</b>	N/A	N/A	Yes Add a floor plan and mark luminaires & zones via desktop
<b>Gateway</b>	N/A	N/A	Required only for energy monitoring, advanced scheduling, automated demand response.
<b>Individual Luminaire Control</b>	Yes	Yes	Yes
<b>Luminaire Grouping Zoning</b>	N/A	Yes	Yes
<b>High End Power Low End Power</b>	Yes but limited (View Remote)	Yes	Yes
<b>Cost</b>	\$	\$\$	\$\$\$
<b>DLC NLC Listed</b>	N/A	Yes	Yes
<b>Energy Monitoring &amp; Data Reporting</b>	N/A	N/A	Monitor energy usage per individual zone & retrofit cost savings calculation + detailed reporting





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-BPL-2X2-3M40-5CCT

Line Item#: 126  
[Go to Bill of Materials](#)

Type: SM8

Powered by 4submittal.com





## Compatible Products:

EnVision offers a variety of nodes, sensors, & gateways that are controlled via remote, ENVISIONLS Bluetooth Mesh & SILVAIR Bluetooth Mesh on all of our 0-10V dimmable fixtures.






### Individual Fixture Controls: PIR Sensor, Bi-Level Dimming, Daylight


Basic Note: -1 • ENVISIONLS Models Note: -BT • SILVAIR Models Note: -SL

	MODEL #	DESIGN	RECOMMENDED FIXTURE	FEATURES
	S-TWC-PIR-1 S-TWC-PIR-BT S-TWC-PIR-SL	Twist-C Control Sensor	Sensor Ready Fixtures: Area Lights, Canopies, Flood Lights, High Bays	All models are equipped with PIR occupancy sensing, high & low end bi-level dimming, & daylight sensing.
	S-TWC-90 + S-TWC-PIR-1 S-TWC-90 + S-TWC-PIR-BT S-TWC-90 + S-TWC-PIR-SL	Twist-C Control Sensor + 90 Degree Arm	Cylinders, Strips, Wall Packs	
	S-AUD-PIR-1 S-AUD-PIR-BT S-AUD-PIR-SL	2.5m Audio Jack	Panels & Troffers	
	S-SN-PIR-1 S-SN-PIR-BT S-SN-PIR-SL	Snap In Sensor	Troffers & Wraps	

### Group Controls ENVISIONLS Models Note : -BT • SILVAIR Models Note: -SL

	MODEL #	DESIGN	VOLTAGE	FEATURES	RECOMMENDED FEATURES
	S-CM-PIR-LV-BT S-CM-PIR-LV-SL	Ceiling Mounted PIR Sensor	12-24V	PIR Sensor, Bi-Level Dimming, Daylight, 360° detection, 12' Max Mounting Height	Connects to 0-10V dimmable fixtures
	S-WM-PIR-CUNV-BT S-WM-PIR-CUNV-SL	Wall Mounted PIR Occupancy Sensor, Bi-Level Dimming, Daylight	120-277V	On/Off PIR occupancy sensor, 180° detection, 30' detection @ 4' Mounting Height	Connects to LED fixtures
	S-WS-120V-USB-SL		120V	Dimming Wall Socket, Two Sockets	Floor Lamps, Other Lamps

### Gateway (Silvaire Only) 4.5–5.5 V DC, 2A Power over Ethernet 36–57 V DC

	MODEL #	DESIGN	VOLTAGE	FEATURES	RECOMMENDED FEATURES
	SGW-102	Wall or Ceiling Mounted	POE	Advanced Energy Monitoring Control	Connects to Silvaire Controls. Gateway is not required.





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 127  
[Go to Bill of Materials](#)

Type: SM3

Powered by 4submittal.com




LIGHTING | REINVENTED

plano **ARCH** PRO

## LDLL | Eclipse-II

Product Data Sheet

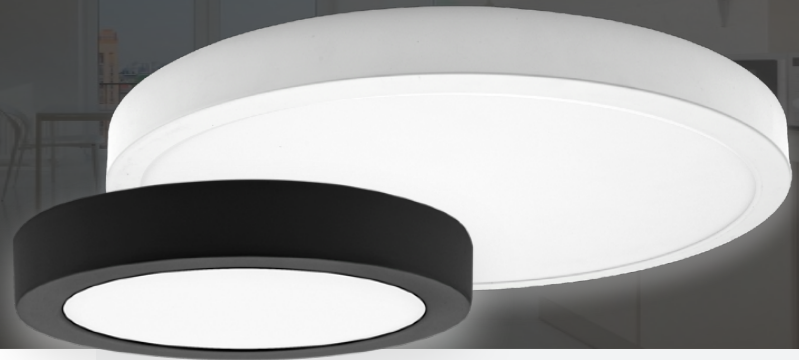

COMMERCIAL-GRADE

### LED Surface Mount Puck Downlight



CCTselect



TruColor Rendering

5" / 7" / 9" / 11" / 13"

#### Product Overview

**INTENDED USE** — The Eclipse-II Series is built for 5-way switchable CCT and is suitable for use in dry, damp, and wet locations, perfect for use in kitchens, hallways, stairways, bathrooms, closets, and just about anywhere you'd need it.

**CONSTRUCTION** — The die-cast aluminum housing is designed for durability and ruggedness.

**INSTALLATION** — Quick-mount aluminum backplate for easy installation.

**WARRANTY** — Featuring a no-compromise 5-year warranty, Energy Star and JA8-compliant, the Eclipse-II is a clean and modern solution for surface mounted driverless design.

ARCHIPELAGO luminaires and LED components undergo rigorous testing by an independent laboratory to meet IESNA LM-79 and LM-80 standards for light output and lumen maintenance. LED color temperature is warranted to shift no more than 180K over the standard warranty period. Correlated Color Temperature (CCT) follows the guidelines set forth in the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

#### Applications



Residential



Hallway



Patio



Entryway

#### Main Features

- Low-Profile Edge-Lit Surface Mount Design
- Durable Di-Cast Aluminum Trim w/ Frosted Lens
- For New Construction or Retrofit Applications
- Suitable for Use in Dry, Damp and Wet Locations
- Suitable for Use in Closets, In Accordance to NEC Guidelines
- Installs on Ceiling and Standard Junction Boxes
- Dimmable to 10% on Compatible TRIAC Dimmers
- 5-Year, 50,000 Hr Warranty
- CEC T24 JA8 Compliant
- NEC Compliant, Suitable for Use in Closet
- Energy Star Certified for 5", 7", 9"

#### Product Warranty\*

5-Year Warranty



50,000 Hrs



\* Standard warranty. Extended warranty available.


Archipelago Lighting, Inc.

| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

[Contact Us](#)



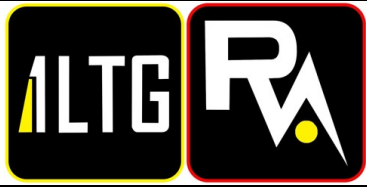

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W


Line Item#: 127  
[Go to Bill of Materials](#)

Type: SM3

Powered by 4submittal.com



LDLL | Eclipse-II

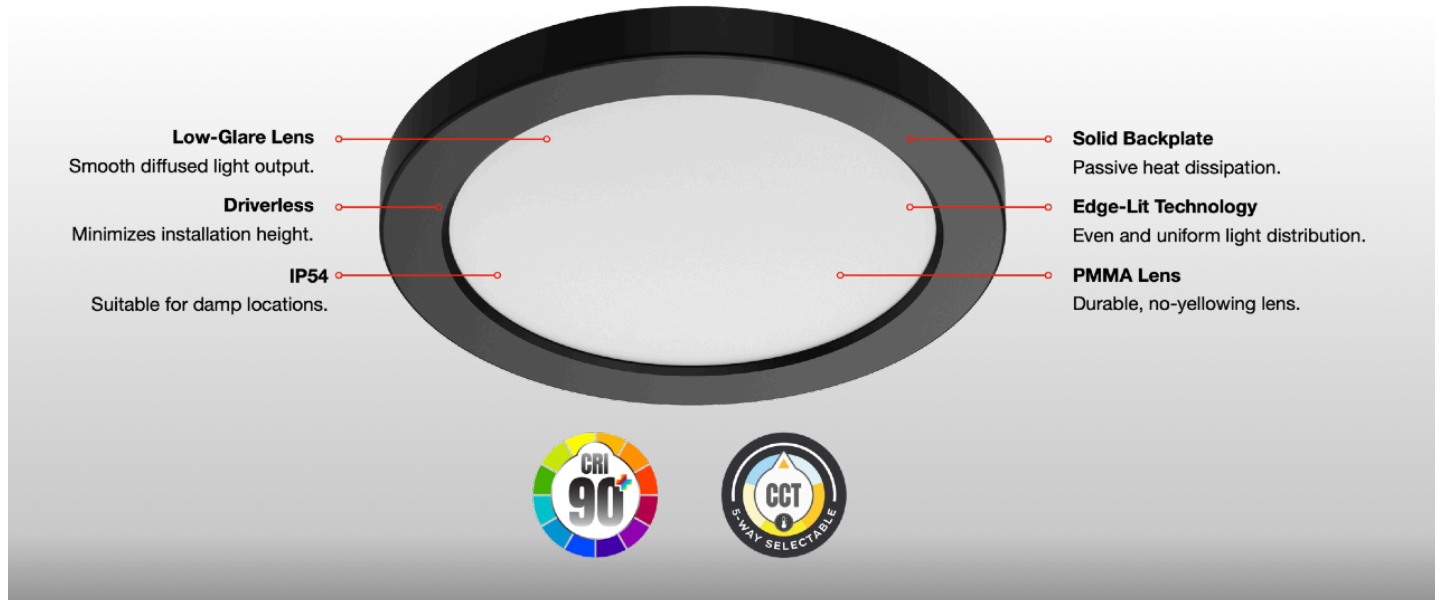

#### Ordering Guide<sup>1</sup>

Model Series	Size (in) / Wattage (W)	Series	CCTselect (K)	Finish Color
<b>LDLL</b> LED Surface Mount Puck Downlight	<b>0510</b> 5inch / 10W <b>0715</b> 7inch / 15W <b>0918</b> 9inch / 18W <b>1121</b> 11inch / 21W <b>1324</b> 13inch / 24W	- <b>E2</b> Eclipse-II	<b>S5</b> 5-CCTselect: 2700K 3000K 3500K 4000K 5000K	/ <b>B</b> Black <b>W</b> White
<b>CATALOG #:</b>				
<b>LDLL</b>		- <b>E2</b>	<b>S5</b>	/

#### Options Guide<sup>2</sup>

EM Driver <sup>3</sup>	Motion Sensor
<input type="checkbox"/> <b>EM15</b> 15W EM Driver <input type="checkbox"/> <b>CRCU</b> 15W EM Driver with Junction Box	<input type="checkbox"/> <b>MSP/W</b> PIR Bi-Level Sensor for 7" and 9" ONLY (White Finish)
<b>OPTIONAL ACCESSORIES #:</b>	

NOTE:

1. Only one selection may be applicable within the same category.
2. Multiple selections may be applicable within the same option category. See Compatible Accessories below for details.
3. EM drivers only work with 7, 9, 11 and 13in fixtures

#### Archipelago Lighting, Inc.


| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

#### Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)






+1 (866) 912-3220

	Date: 1/12/2026	Description: LDLL0510-E2S5/W	Line Item#: 127
	Project: FINDLAY FLATS		<a href="#">Go to Bill of Materials</a>
			Type: SM3
Powered by 4submittal.com			



LDLL | Eclipse-II

Sizing & Measurements


Model Series	Dimensions	Overall Diameter (in)	Depth (IN)
LDLL0510-E2		5.51	0.79
LDLL0715-E2		7.48	0.82
LDLL0918-E2		8.86	0.79
LDLL1121-E2		10.98	0.98
LDLL1124-E2		12.80	0.98

Recommended Dimmers

Make	Models			
Lutron	TG-600PR-WH S-600PR-WH CTCL-153PDH-WH	TGCL-153PH-LA SLV-600P-AL DV-600PR-WH	SCL-153PH-WH GT-600P DVCL-153P	MSCL-OP153M MACL-153M//MA-R PD-6WCL
Leviton	6672 IPL06	6674	DSL06	RNL06

Accessories (Standard)

Accessories (Optional)



<b>Mounting Bracket</b>	<b>Wire Nuts</b>	<b>Bolts</b>	<b>15W EM Driver</b>	<b>PIR Bi-Level Sensor</b>
Compatible to 2.75" or 3.50" Junction Box			EM15-HMB/170DC CRCU-EM/JBM	LDLL-E2/MSP/W

Archipelago Lighting, Inc.

| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 127  
[Go to Bill of Materials](#)


Type: SM3


Powered by 4submittal.com



LDLL | Eclipse-II

#### EM Driver / J-Box (Optional)

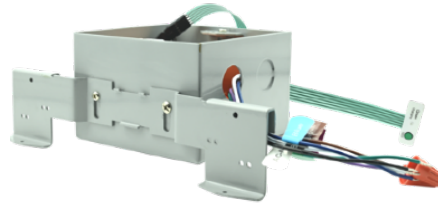

Technical Specification	CRCU-EM/JBM
Emergency Power	15W Max
Installation Method	Recessed
IP Rating	IP20
CEC T.24/JA8 Compliant	Yes
Color Finish	Grey
Physical Features	<ul style="list-style-type: none"><li>Directly connect to AC input</li><li>Fits 2.75" and 3.5" J-Box</li><li>Supports recessed in-ceiling mount</li></ul>
Self-Diagnostic Test Switch	<ol style="list-style-type: none"><li>Emergency conversion kit will go into emergency mode when test switch is pressed while main power is ON.</li><li>Will go into charging mode if test switch is not pressed.</li><li>In emergency mode, pressing the test switch for 3-seconds will inactivate emergency mode.</li></ol>
Indicator Status Light	<ol style="list-style-type: none"><li>Green ON: Charging mode / charging full</li><li>Green OFF: Mains power OFF / discharging mode</li></ol>
Dimension	W4.29in x H2.96 

#### Archipelago Lighting, Inc.


| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

#### Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220

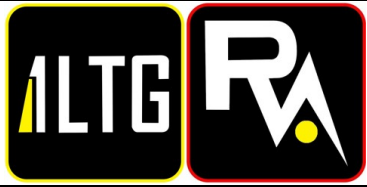

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-VT-ADJ-24-21W-5CCT-BN

Line Item#: 128  
[Go to Bill of Materials](#)


Type: V1

Powered by 4submittal.com

**EnVisionLED**<sup>TM</sup>  
WWW.ENVISIONLEDLIGHTING.COM

## Vanity Fixtures

### Square Adjustable Swivel

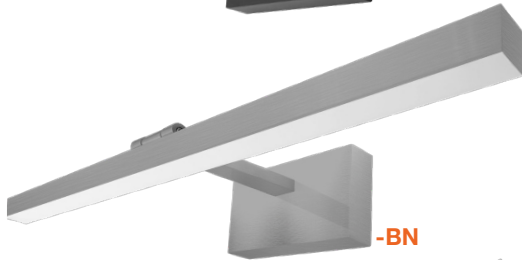

FRONT VIEW



90° Rotatable Angle

Vanity Fixture



#### Detail Specifications:

- Power: 21W
- Lumens: 2,700
- Finishes: Black, Brushed Nickel, Chrome
- IP Rating: IP54 Damp Location
- Beam Angle: 100°
- Chip: SMD 2835, R9 >50, CRI >90
- Operating Temperature: -40° - 114° F
- Lens: Frosted Acrylic, non-yellowing
- Average life (L70) of 50,000 hours

#### Applications:

- Bathrooms & Lavatories
- Hallways & Corridors
- Artwork, Museums
- Residential & Multifamily
- Education, Healthcare, Retail, Hospitality

#### Product Information:

- Available in 23.6" length
- Adjustable Angle: Lens swivels up and down
- Wide j-box for easier installation in retrofit and new construction applications
- Select-n-Switch Technology: 5-CCT Selectable

#### Driver Options:

- Triac & ELV dimmable down to 5%
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz
- Built in 2.5Kv Surge Protector
- Flicker Free

#### Mounting & Installations:

- 30/40 Junction Box
- Surface mount bracket included

#### Certifications:

- ETL Listed for USA and CA
- CA Title 24 JA8-2022 CEC Listed
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

#### Series

LED-VT-ADJ-24-21W-5CCT-BL

Black

LED-VT-ADJ-24-21W-5CCT-BN

Brushed Nickel

LED-VT-ADJ-24-21W-5CCT-CH


Chrome

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 04.25

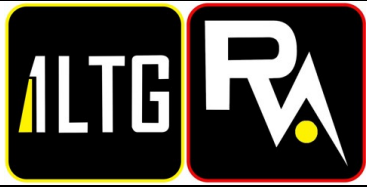

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-VT-ADJ-24-21W-5CCT-BN

Line Item#: 128  
[Go to Bill of Materials](#)

Type: V1

Powered by 4submit.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM


## Vanity Fixtures

### Square Adjustable Swivel

#### FEATURES




90° Rotatable Angle



5-CCT Selectable


#### MEASUREMENTS

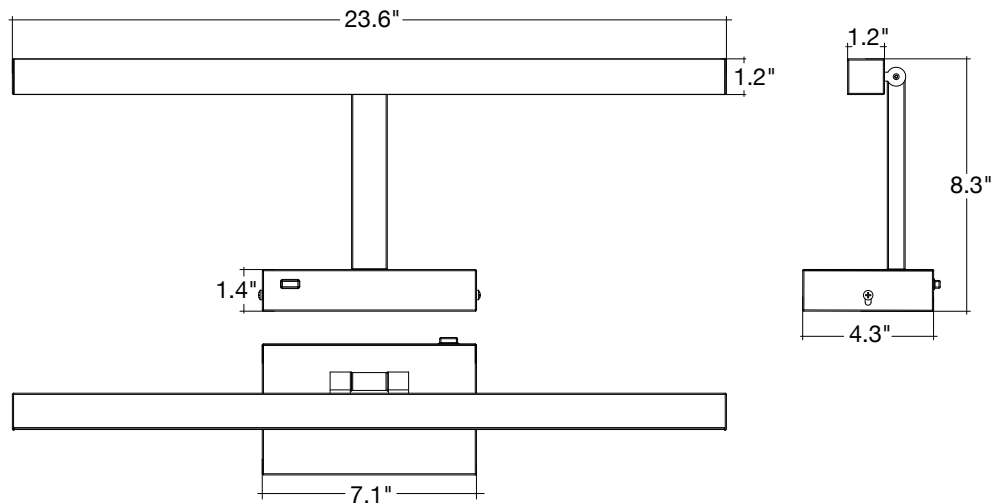

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)



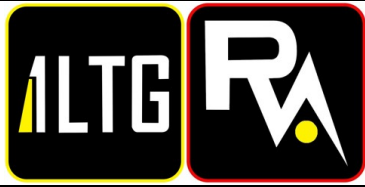

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
SM56885FTSN

Line Item#: 129  
[Go to Bill of Materials](#)

Type: SM13

Powered by 4submittal.com


Essentials - 588x | SM56885FTSN

Job Name: Job Type: Quantity: Comments:



#### PRODUCT DESCRIPTION

Maxim Lighting's commitment to both the residential lighting and the home building industries will assure you a product line focused on your lighting needs. With Maxim Lighting you will find quality product that is well designed, well priced and readily available.



#### MEASUREMENTS

DIMENSION : 9" L x 9" W x 5" H  
HANGING WEIGHT : 2.18 lb

#### LAMPING

INPUT VOLTAGE : 120V  
BULB : 60W Incandescent E26 Medium , 120W Total  
BULB INCLUDED : (Not Included)  
DIMMABLE : Yes

#### FINISHES OPTION

Oil Rubbed Bronze (OI)  
 Satin Nickel (SN)

#### GLASS

Frosted FT

#### MATERIAL

Glass, Steel

#### RATINGS

cETLus  
Damp Location



#### ADDITIONAL

OPERATING TEMPERATURE:  
-20°C (-4°F), 40°C (104°F)

Always consult a qualified electrician before installing any lighting product.

# STUDIO•M

Modifications or Customizations: Please email [contract@studiomlighting.com](mailto:contract@studiomlighting.com)

Sample Request: Please email [order@studiomlighting.com](mailto:order@studiomlighting.com) with subject line

"Sample Order, [Project Name] / [Specifier/Designer]"

All samples are subject to Studio M approval and must show proof of project and/or explanation.

Job Name:	Job Type:
Quantity:	Comments:

StudioMlighting.com - 1.626.956.4209



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-A19-9W-5CCT

Line Item#: 130  
[Go to Bill of Materials](#)

Type: SM13 LAMP

Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

Project: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_

LED Bulbs



## A Bulb SERIES: 5-CCT LED BULBS



A-19, A-21



A-19



A-21



### Detail Specifications

- IP Rating: Damp Location
- Beam Angle: 220°
- 5-CCT: 27/30/35/40/50K
- Chip: SMD 2835, R9 >50, CRI >90
- Operating Temperature: -4° - 114° F
- Average life (L70) of 25,000 hours

### Applications:

- Decorative Lighting
- Interior Lighting
- Table & Floor Lamps
- Showcases
- Residential, Multi-Family, Commercial

### Product Information:

- Suitable for use in existing fixtures
- Instant-On to full brightness

### Driver Options:

- 120V
- Triac Dimmable
- PF >0.9, 50/60Hz

### Mounting & Installation:

- E26 Socket
- Direct A Lamp Replacement

### Packaging:

- All bulbs come in individual color boxes, but are sold in inner carton qty packs only

Carton Qty.	A-19	A-21
Inner Carton	10	10
Master Carton	100	100

### Certifications:

- ETL Listed for USA and CA
- Energy Star
- Title 20 and JA8-2022 Approved
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

### Dimmer List:

Leviton	6674
Lutron	LGCL-153P
Lutron	DVCL-153P
Lutron	CTCL-153P
Lutron	MAELV-300

Series

**LED-A19-9W-5CCT**

600 Lumens 60W Equivalent

**LED-A21-15W-5CCT**


1,600 Lumens 100W Equivalent

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 10.23

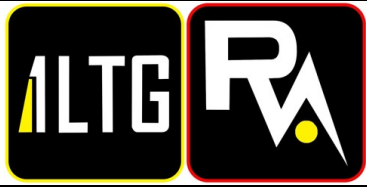

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 131  
[Go to Bill of Materials](#)

Type: SM2

Powered by 4submittal.com




LIGHTING | REINVENTED

plano **ARCH** PRO

## LDLL | Eclipse-II

Product Data Sheet

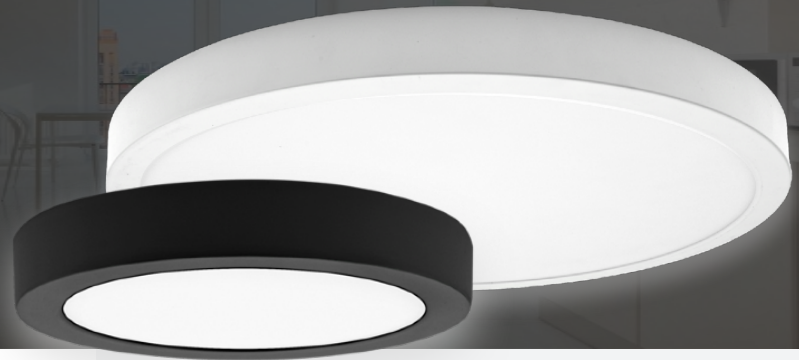

COMMERCIAL-GRADE

### LED Surface Mount Puck Downlight



CCTselect



TruColor Rendering

5" / 7" / 9" / 11" / 13"

#### Product Overview

**INTENDED USE** — The Eclipse-II Series is built for 5-way switchable CCT and is suitable for use in dry, damp, and wet locations, perfect for use in kitchens, hallways, stairways, bathrooms, closets, and just about anywhere you'd need it.

**CONSTRUCTION** — The die-cast aluminum housing is designed for durability and ruggedness.

**INSTALLATION** — Quick-mount aluminum backplate for easy installation.

**WARRANTY** — Featuring a no-compromise 5-year warranty, Energy Star and JA8-compliant, the Eclipse-II is a clean and modern solution for surface mounted driverless design.

ARCHIPELAGO luminaires and LED components undergo rigorous testing by an independent laboratory to meet IESNA LM-79 and LM-80 standards for light output and lumen maintenance. LED color temperature is warranted to shift no more than 180K over the standard warranty period. Correlated Color Temperature (CCT) follows the guidelines set forth in the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

#### Applications



Residential



Hallway



Patio



Entryway

#### Main Features

- Low-Profile Edge-Lit Surface Mount Design
- Durable Di-Cast Aluminum Trim w/ Frosted Lens
- For New Construction or Retrofit Applications
- Suitable for Use in Dry, Damp and Wet Locations
- Suitable for Use in Closets, In Accordance to NEC Guidelines
- Installs on Ceiling and Standard Junction Boxes
- Dimmable to 10% on Compatible TRIAC Dimmers
- 5-Year, 50,000 Hr Warranty
- CEC T24 JA8 Compliant
- NEC Compliant, Suitable for Use in Closet
- Energy Star Certified for 5", 7", 9"

#### Product Warranty\*

5-Year Warranty



50,000 Hrs



\* Standard warranty. Extended warranty available.


Archipelago Lighting, Inc.

| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

[Contact Us](#)



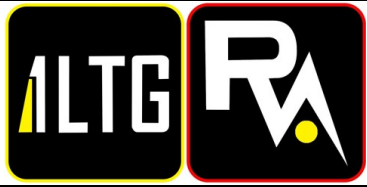

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W


Line Item#: 131  
[Go to Bill of Materials](#)

Type: SM2

Powered by 4submittal.com



LDLL | Eclipse-II

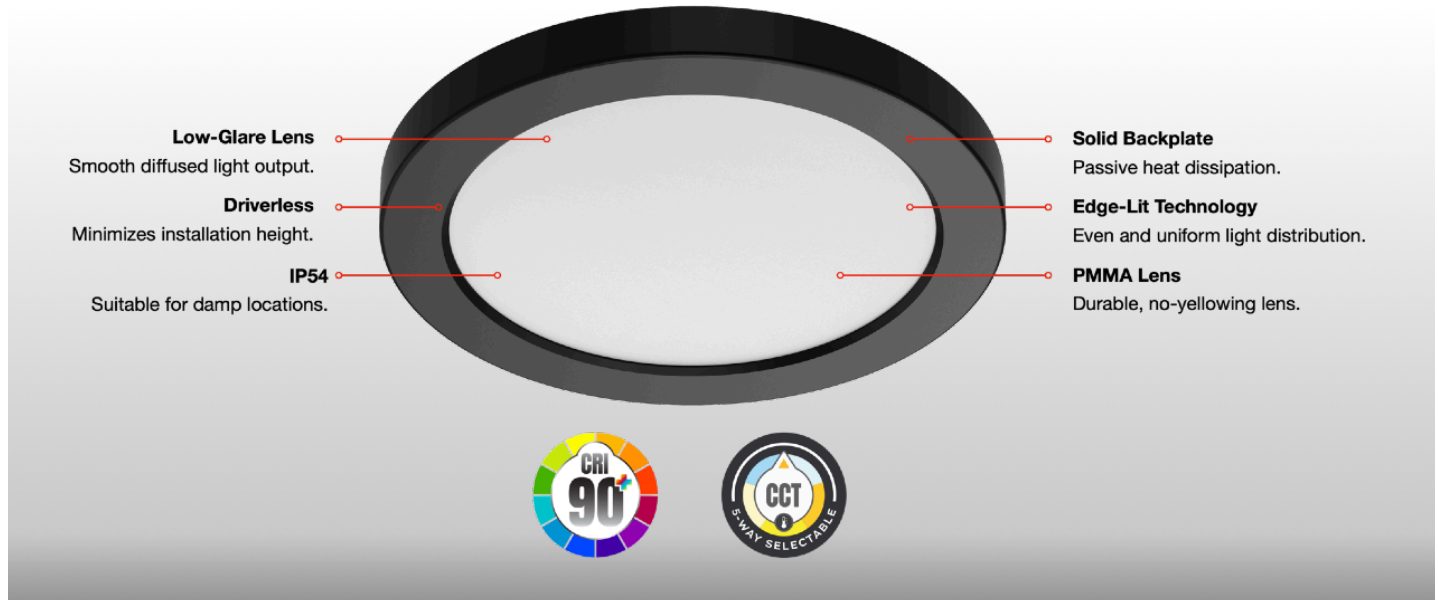

#### Ordering Guide<sup>1</sup>

Model Series	Size (in) / Wattage (W)	Series	CCTselect (K)	Finish Color
<b>LDLL</b> LED Surface Mount Puck Downlight	<b>0510</b> 5inch / 10W <b>0715</b> 7inch / 15W <b>0918</b> 9inch / 18W <b>1121</b> 11inch / 21W <b>1324</b> 13inch / 24W	- <b>E2</b> Eclipse-II	<b>S5</b> 5-CCTselect: 2700K 3000K 3500K 4000K 5000K	/ <b>B</b> Black <b>W</b> White
<b>CATALOG #:</b>				
<b>LDLL</b>		- <b>E2</b>	<b>S5</b>	/

#### Options Guide<sup>2</sup>

EM Driver <sup>3</sup>	Motion Sensor
<input type="checkbox"/> <b>EM15</b> 15W EM Driver <input type="checkbox"/> <b>CRCU</b> 15W EM Driver with Junction Box	<input type="checkbox"/> <b>MSP/W</b> PIR Bi-Level Sensor for 7" and 9" ONLY (White Finish)
<b>OPTIONAL ACCESSORIES #:</b>	

NOTE:

1. Only one selection may be applicable within the same category.
2. Multiple selections may be applicable within the same option category. See Compatible Accessories below for details.
3. EM drivers only work with 7, 9, 11 and 13in fixtures

#### Archipelago Lighting, Inc.


| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

#### Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)






+1 (866) 912-3220

	Date: 1/12/2026	Description: LDLL0510-E2S5/W	Line Item#: 131
	Project: FINDLAY FLATS		<a href="#">Go to Bill of Materials</a>
			Type: SM2
Powered by 4submittal.com			



LDLL | Eclipse-II

Sizing & Measurements


Model Series	Dimensions	Overall Diameter (in)	Depth (IN)
LDLL0510-E2		5.51	0.79
LDLL0715-E2		7.48	0.82
LDLL0918-E2		8.86	0.79
LDLL1121-E2		10.98	0.98
LDLL1124-E2		12.80	0.98

Recommended Dimmers

Make	Models			
Lutron	TG-600PR-WH S-600PR-WH CTCL-153PDH-WH	TGCL-153PH-LA SLV-600P-AL DV-600PR-WH	SCL-153PH-WH GT-600P DVCL-153P	MSCL-OP153M MACL-153M//MA-R PD-6WCL
Leviton	6672 IPL06	6674	DSL06	RNL06

Accessories (Standard)

Accessories (Optional)




<b>Mounting Bracket</b>	<b>Wire Nuts</b>	<b>Bolts</b>	<b>15W EM Driver</b>	<b>PIR Bi-Level Sensor</b>
Compatible to 2.75" or 3.50" Junction Box			EM15-HMB/170DC CRCU-EM/JBM	LDLL-E2/MSP/W

Archipelago Lighting, Inc.

| **Headquarter:** 4615 State Street, Montclair, CA 91763  
| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)  
+1 (866) 912-3220


	Date: 1/12/2026	<b>Description:</b> LDLL0510-E2S5/W	Line Item#: 131
	Project: FINDLAY FLATS		<a href="#">Go to Bill of Materials</a>
			Type: SM2


Powered by 4submittal.com



LDLL | Eclipse-II

EM Driver / J-Box (Optional)

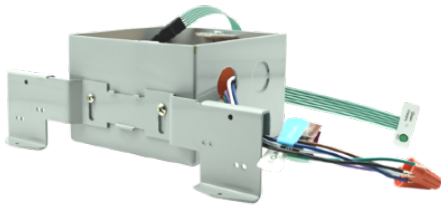

Technical Specification	CRCU-EM/JBM
Emergency Power	15W Max
Installation Method	Recessed
IP Rating	IP20
CEC T.24/JA8 Compliant	Yes
Color Finish	Grey
Physical Features	<ul style="list-style-type: none"> <li>Directly connect to AC input</li> <li>Fits 2.75" and 3.5" J-Box</li> <li>Supports recessed in-ceiling mount</li> </ul>
Self-Diagnostic Test Switch	<ol style="list-style-type: none"> <li>Emergency conversion kit will go into emergency mode when test switch is pressed while main power is ON.</li> <li>Will go into charging mode if test switch is not pressed.</li> <li>In emergency mode, pressing the test switch for 3-seconds will inactivate emergency mode.</li> </ol>
Indicator Status Light	<ol style="list-style-type: none"> <li>Green ON: Charging mode / charging full</li> <li>Green OFF: Mains power OFF / discharging mode</li> </ol>
Dimension	<p>W4.29in x H2.96</p> 

Archipelago Lighting, Inc.

| **Headquarter:** 4615 State Street, Montclair, CA 91763  
 | **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)  
 +1 (866) 912-3220





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 132  
[Go to Bill of Materials](#)

Type: SM1

Powered by 4submittal.com




LIGHTING | REINVENTED

plano **ARCH** PRO

## LDLL | Eclipse-II

Product Data Sheet

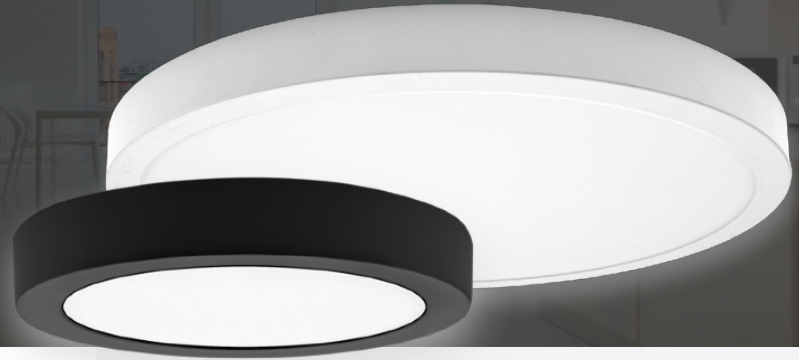

COMMERCIAL-GRADE

### LED Surface Mount Puck Downlight



CCTselect



TruColor Rendering

5" / 7" / 9" / 11" / 13"

#### Product Overview

**INTENDED USE** — The Eclipse-II Series is built for 5-way switchable CCT and is suitable for use in dry, damp, and wet locations, perfect for use in kitchens, hallways, stairways, bathrooms, closets, and just about anywhere you'd need it.

**CONSTRUCTION** — The die-cast aluminum housing is designed for durability and ruggedness.

**INSTALLATION** — Quick-mount aluminum backplate for easy installation.

**WARRANTY** — Featuring a no-compromise 5-year warranty, Energy Star and JA8-compliant, the Eclipse-II is a clean and modern solution for surface mounted driverless design.

ARCHIPELAGO luminaires and LED components undergo rigorous testing by an independent laboratory to meet IESNA LM-79 and LM-80 standards for light output and lumen maintenance. LED color temperature is warranted to shift no more than 180K over the standard warranty period. Correlated Color Temperature (CCT) follows the guidelines set forth in the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

#### Applications



Residential



Hallway



Patio



Entryway

#### Main Features

- Low-Profile Edge-Lit Surface Mount Design
- Durable Di-Cast Aluminum Trim w/ Frosted Lens
- For New Construction or Retrofit Applications
- Suitable for Use in Dry, Damp and Wet Locations
- Suitable for Use in Closets, In Accordance to NEC Guidelines
- Installs on Ceiling and Standard Junction Boxes
- Dimmable to 10% on Compatible TRIAC Dimmers
- 5-Year, 50,000 Hr Warranty
- CEC T24 JA8 Compliant
- NEC Compliant, Suitable for Use in Closet
- Energy Star Certified for 5", 7", 9"

#### Product Warranty\*

5-Year Warranty



50,000 Hrs



\* Standard warranty. Extended warranty available.

Archipelago Lighting, Inc.

| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

[Contact Us](#)





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 132  
[Go to Bill of Materials](#)

Type: SM1

Powered by 4submittal.com



LDLL | Eclipse-II

**Low-Glare Lens**  
Smooth diffused light output.

**Driverless**  
Minimizes installation height.

**IP54**  
Suitable for damp locations.

**Solid Backplate**  
Passive heat dissipation.

**Edge-Lit Technology**  
Even and uniform light distribution.

**PMMA Lens**  
Durable, no-yellowing lens.



#### Ordering Guide<sup>1</sup>

Model Series	Size (in) / Wattage (W)	Series	CCTselect (K)	Finish Color
<b>LDLL</b> LED Surface Mount Puck Downlight	<b>0510</b> 5inch / 10W <b>0715</b> 7inch / 15W <b>0918</b> 9inch / 18W <b>1121</b> 11inch / 21W <b>1324</b> 13inch / 24W	- <b>E2</b> Eclipse-II	<b>S5</b> 5-CCTselect: 2700K 3000K 3500K 4000K 5000K	/ <b>B</b> Black <b>W</b> White
<b>CATALOG #:</b>				
<b>LDLL</b>		- <b>E2</b>	<b>S5</b>	/

#### Options Guide<sup>2</sup>

EM Driver <sup>3</sup>	Motion Sensor
<input type="checkbox"/> <b>EM15</b> 15W EM Driver <input type="checkbox"/> <b>CRCU</b> 15W EM Driver with Junction Box	<input type="checkbox"/> <b>MSP/W</b> PIR Bi-Level Sensor for 7" and 9" ONLY (White Finish)
<b>OPTIONAL ACCESSORIES #:</b>	

NOTE:

1. Only one selection may be applicable within the same category.
2. Multiple selections may be applicable within the same option category. See Compatible Accessories below for details.
3. EM drivers only work with 7, 9, 11 and 13in fixtures

Archipelago Lighting, Inc.


| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

**Contact Us**

[www.archipelagolighting.com](http://www.archipelagolighting.com)






+1 (866) 912-3220

	Date: 1/12/2026	Description: LDLL0510-E2S5/W	Line Item#: 132
	Project: FINDLAY FLATS		<a href="#">Go to Bill of Materials</a>
			Type: SM1
Powered by 4submittal.com			



LDLL | Eclipse-II

Sizing & Measurements


Model Series	Dimensions	Overall Diameter (in)	Depth (IN)
LDLL0510-E2		5.51	0.79
LDLL0715-E2		7.48	0.82
LDLL0918-E2		8.86	0.79
LDLL1121-E2		10.98	0.98
LDLL1124-E2		12.80	0.98

Recommended Dimmers

Make	Models			
Lutron	TG-600PR-WH S-600PR-WH CTCL-153PDH-WH	TGCL-153PH-LA SLV-600P-AL DV-600PR-WH	SCL-153PH-WH GT-600P DVCL-153P	MSCL-OP153M MACL-153M//MA-R PD-6WCL
Leviton	6672 IPL06	6674	DSL06	RNL06

Accessories (Standard)

Accessories (Optional)



<b>Mounting Bracket</b>	<b>Wire Nuts</b>	<b>Bolts</b>	<b>15W EM Driver</b>	<b>PIR Bi-Level Sensor</b>
Compatible to 2.75" or 3.50" Junction Box			EM15-HMB/170DC CRCU-EM/JBM	LDLL-E2/MSP/W

Archipelago Lighting, Inc.

| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 132  
[Go to Bill of Materials](#)


Type: SM1


Powered by 4submittal.com



LDLL | Eclipse-II

#### EM Driver / J-Box (Optional)

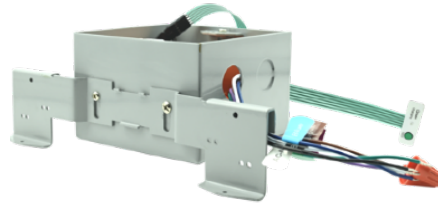

Technical Specification	CRCU-EM/JBM
Emergency Power	15W Max
Installation Method	Recessed
IP Rating	IP20
CEC T.24/JA8 Compliant	Yes
Color Finish	Grey
Physical Features	<ul style="list-style-type: none"><li>Directly connect to AC input</li><li>Fits 2.75" and 3.5" J-Box</li><li>Supports recessed in-ceiling mount</li></ul>
Self-Diagnostic Test Switch	<ol style="list-style-type: none"><li>Emergency conversion kit will go into emergency mode when test switch is pressed while main power is ON.</li><li>Will go into charging mode if test switch is not pressed.</li><li>In emergency mode, pressing the test switch for 3-seconds will inactivate emergency mode.</li></ol>
Indicator Status Light	<ol style="list-style-type: none"><li>Green ON: Charging mode / charging full</li><li>Green OFF: Mains power OFF / discharging mode</li></ol>
Dimension	W4.29in x H2.96 

#### Archipelago Lighting, Inc.

| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

#### Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220



Date: 1/12/2026

Project:  
FINDLAY FLATSDescription:  
LED-RST-4FT-3M40W-4CCT-SRLine Item#: 134  
[Go to Bill of Materials](#)

Type: ST1

Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Round LED Strip Fixtures

### 5-CCT & 3-Power Selectable

### Sensor Ready



3M25W		3M40W		3M60W		3M80W		3M100W	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
15	2,100	20	2,600	40	5,200	50	6,500	70	9,100
20	2,800	30	3,900	50	6,500	65	8,450	85	11,050
25	3,500	40	5,200	60	7,800	80	10,400	100	13,000

Project: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_

Strips

**Detail Specification:**

- Finish: White, Custom finishes available
- IP Rating: Damp Location (IP44)
- Beam Angle: 130°
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 122° F
- Lens: Round Acrylic Frosted Lens
- Average life (L70) of 50,000 hours

**Applications:**

- Stairwell & Hallways
- Utility & Storage
- Garage Structures
- Office and Meeting Rooms
- Shop Lighting
- Commercial and Industrial

**Product Information:**

- Aluminum housing finished with corrosion free power coat
- Easy j-box access: snap on and off tool-less design
- 40 J-box cover included with every fixture
- Audio Jack Sensor Ready (with RST-SR bracket)
- Sensor Options:
  - Standard Sensors
  - SILVAIR Bluetooth Mesh
  - ENVISIONLS Bluetooth
  - [Click Here](#) for More Information

**Driver Options:**

- UNV: 120-277V 0-10V Dimmable
- Optional 347-480V step down transformer available
- THD: <15% (+/-5% tolerance), PF >0.9, 50/60Hz
- 12V low voltage aux output for controls
- Flicker Free

**Mounting & Installation**

- Surface mount into 30 or 40 j-box
- Optional 10' & 20' suspension kit available
- Optional 6' chain mount available
- Rated for installation in closets

**Certifications**

- UL Listed for USA and CA
- DLC Premium Listed
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

Series	Sensor <sup>1</sup>	Emergency <sup>2</sup>	Finish <sup>3</sup>	Flex
LED-RST-2FT-3M25W-5CCT-SR	(Blank)	(Blank)	(Blank)	(Blank)
LED-RST-4FT-3M40W-5CCT-SR	No Sensor	No Emergency	White	No Flex
LED-RST-4FT-3M80W-5CCT-SR	BMS <sup>1</sup>	Backup	BL	6FLX
LED-RST-8FT-3M60W-5CCT-SR	Microwave	EMB	Black	6' Flex
LED-RST-8FT-3M100W-5CCT-SR	Bi-Level Motion	Emergency	GRY <sup>3</sup>	Whip
	+ Daylight Sensor	Backup	Gray	
	(Internal Sensor)	EMB20	BRZ <sup>3</sup>	
	BMSPIR	Emergency	Bronze	
	Available for field install.	Backup (20W)	CS <sup>3</sup>	
			Custom Color	

1. Sensor Note:  
Microwave: Detects motion through barriers such as walls, and doors. Ideal for applications where obstacles might obstruct the line of sight. Works effectively outdoors, in large open spaces, & parking lots. Do not use in areas of high vibrations or metal.  
PIR: Ideal for indoor environments with clear lines of sight to the area of interest. Detects warm objects, like a person or animal. Good for high vibration, areas of metal.

2. Standard emergency is 8W (1,040LM). 20W available, inquire factory

3. Standard quick ship finish is white & black. Other colors are custom finishes.

**Optional Accessories (Order Separately)**

Sensors	Suspension Kit	Accessories	Wire Guards
<b>RST-SR</b> Receptacle for Sensor (Required for below sensors)	<b>SK-10FT-Y-LC-PD</b> 10' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)	<b>RST-SM-CN</b> Surface mount linkable bracket	<b>RST-2FT-WG</b> 2ft Wire Guard
<b>S-AUD-PIR-1</b> PIR Bi-Level Motion + Daylight Sensor Remote Required: (S-LINE-R)	<b>SK-20FT-Y-LC-PD</b> 20' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)	<b>RST-PDM-CN</b> Pendant mount linkable bracket	<b>RST-4FT-WG</b> Wire Guard (order 2 for 8ft fixtures)
<b>S-AUD-PIR-BT</b> PIR ENVISIONLS Bluetooth Control			
<b>S-AUD-PIR-SL</b> PIR SILVAIR Bluetooth Mesh			

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 10.25



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-RST-4FT-3M40W-4CCT-SR

Line Item#: 134  
[Go to Bill of Materials](#)

Type: ST1


Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM


## Round LED Strip Fixtures

### 5-CCT & 3-Power Selectable


#### FEATURES

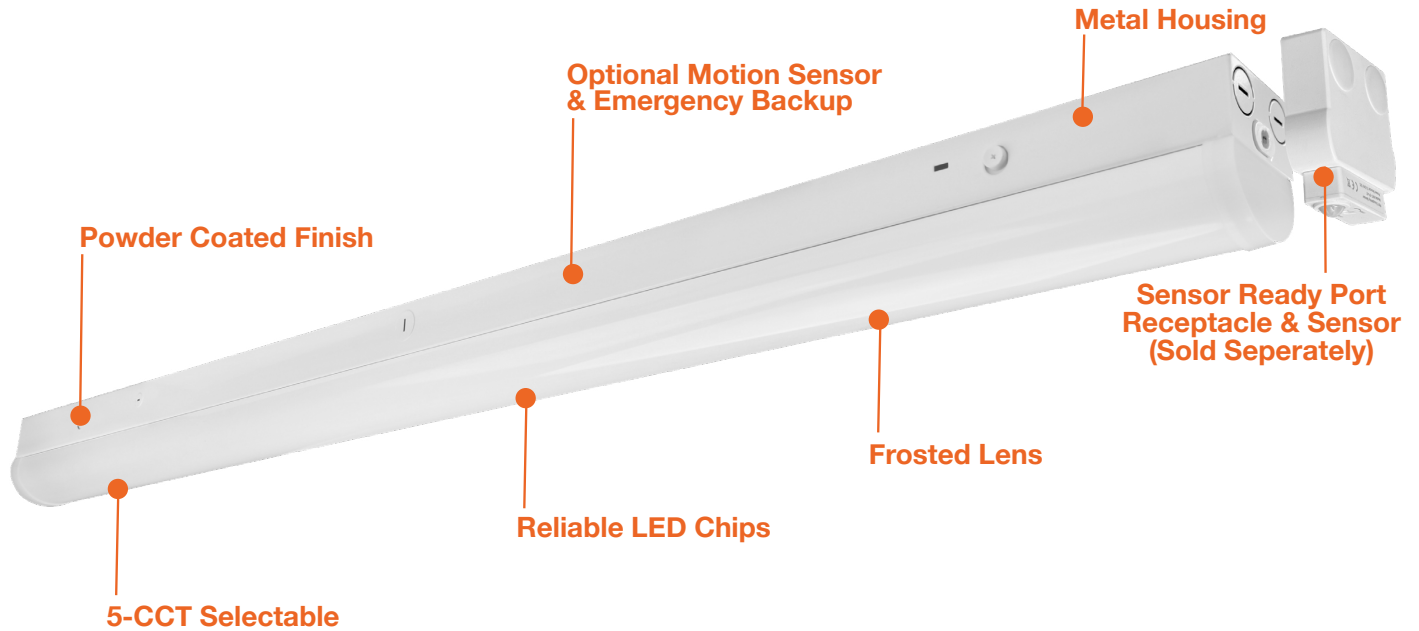

#### DIMENSIONS

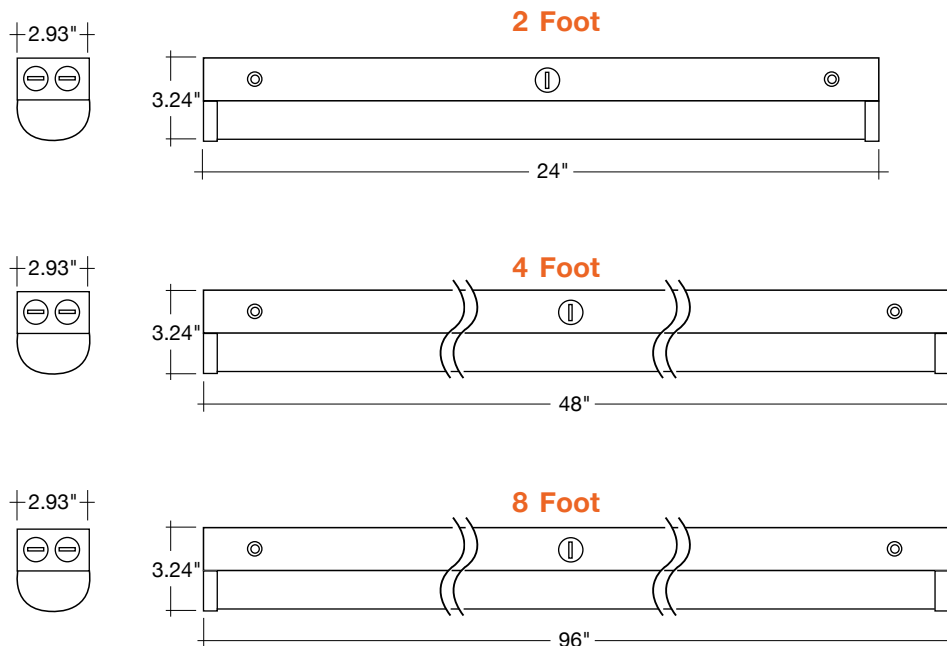



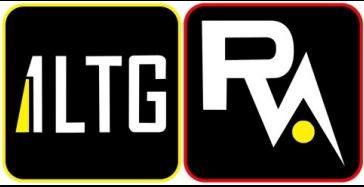

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-RST-4FT-3M40W-4CCT-SR

Line Item#: 134  
[Go to Bill of Materials](#)

Type: ST1

Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Round LED Strip Fixtures G3

### 4-CCT & 3-Power Selectable

#### ACCESSORIES



RST-SR



S-AUD-PIR-1  
S-AUD-PIR-BT  
S-AUD-PIR-SL



SK-10FT-Y-LC-PD  
SK-20FT-Y-LC-PD




RST-SM-CN




RST-PDM-CN



RST-2FT-WG  
RST-4FT-WG

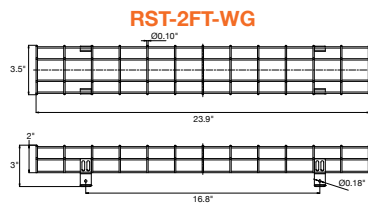

RST-2FT-WG

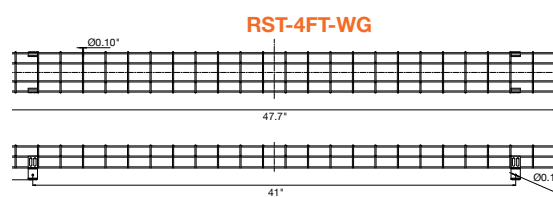

RST-4FT-WG



2-RST-4FT-WG FOR 8FT



Model	Voltage	Watts	Lumens	Color	CRI
LED-RST-2FT-3M25W-5CCT-SR	120-277V	25/20/15w	3,500/2,800/2,100	30/35/40/50/65k	>80
LED-RST-4FT-3M40W-5CCT-SR	120-277V	40/30/20w	5,200/3,900/2,600	30/35/40/50/65k	>80
LED-RST-4FT-3M80W-5CCT-SR	120-277V	80/65/50w	10,400/8,450/6,500	30/35/40/50/65k	>80
LED-RST-8FT-3M60W-5CCT-SR	120-277V	60/50/40w	7,800/6,500/5,200	30/35/40/50/65k	>80
LED-RST-8FT-3M100W-5CCT-SR	120-277V	100/85/70w	13,000/11,050/9,100	30/35/40/50/65k	>80

#### SENSORS

Pre-Installed Accessory Model	Description
RST-SR	Sensor Receptacle (REQUIRED)
S-AUD-PIR-1	PIR Bi-Level + Daylight: Audio Jack
S-AUD-PIR-BT	PIR Bi-Level + Daylight: Audio Jack Bluetooth EnVisionLS App
S-AUD-PIR-SL	PIR Bi-Level + Daylight: Audio Jack SILVAIR

#### SUSPENSION KIT


Model	Description
SK-10FT-Y-LC-PD	10' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)
SK-20FT-Y-LC-PD	20' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)

#### ACCESSORIES

Model	Description
RST-SM-CN	Surface Mount Linkable Bracket
RST-PDM-CN	Pendant Mount Linkable Bracket

#### WIRE GUARDS

Model	Description
RST-2FT-WG	2ft Wire Guard
RST-4FT-WG	4ft Wire Guard (order 2 for 8ft fixtures)

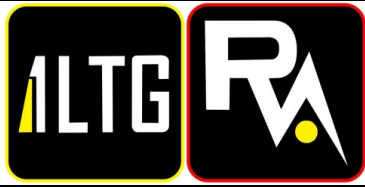

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-RST-4FT-3M40W-4CCT-SR









Line Item#: 134  
[Go to Bill of Materials](#)

Type: ST1


Powered by 4submittal.com

## EnVisionLED™ Control Options

EnVision LED offers 3 control systems compatible with our LED Fixtures for projects of all sizes and budgets.

	Basic Controls	EnVisionLS 	EnVisionLED™ x SILVAIR 
<b>Description</b>	Standard Plug In Sensors	Basic Bluetooth Wireless Control	Advanced Bluetooth Wireless Control
<b>Recommended Quantity</b> (but not limited to)	N/A	>40-50 Nodes	>50 Nodes
<b>Maximum Zone Quantity</b>	N/A	100	3,000
<b>Commissioning Tool</b>	Remote Only	  ENVISIONLS App 	  SILVAIR App 
<b>Commissioning Process</b>	Individually Set via Remote	Wireless Must be done on site	Wireless- Initial linking must be done on site. Commissioning can be done via desktop remotely.
<b>Floor Plan Upload</b>	N/A	N/A	Yes Add a floor plan and mark luminaires & zones via desktop
<b>Gateway</b>	N/A	N/A	Required only for energy monitoring, advanced scheduling, automated demand response.
<b>Individual Luminaire Control</b>	Yes	Yes	Yes
<b>Luminaire Grouping Zoning</b>	N/A	Yes	Yes
<b>High End Power Low End Power</b>	Yes but limited (View Remote)	Yes	Yes
<b>Cost</b>	\$	\$\$	\$\$\$
<b>DLC NLC Listed</b>	N/A	Yes	Yes
<b>Energy Monitoring &amp; Data Reporting</b>	N/A	N/A	Monitor energy usage per individual zone & retrofit cost savings calculation + detailed reporting



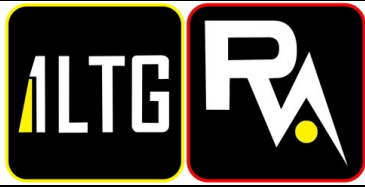

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-RST-4FT-3M40W-4CCT-SR

Line Item#: 134  
[Go to Bill of Materials](#)

Type: ST1

Powered by 4submittal.com





## Compatible Products:

EnVision offers a variety of nodes, sensors, & gateways that are controlled via remote, ENVISIONLS Bluetooth Mesh & SILVAIR Bluetooth Mesh on all of our 0-10V dimmable fixtures.






### Individual Fixture Controls: PIR Sensor, Bi-Level Dimming, Daylight


Basic Note: -1 • ENVISIONLS Models Note: -BT • SILVAIR Models Note: -SL


	MODEL #	DESIGN	RECOMMENDED FIXTURE	FEATURES
	S-TWC-PIR-1 S-TWC-PIR-BT S-TWC-PIR-SL	Twist-C Control Sensor	Sensor Ready Fixtures: Area Lights, Canopies, Flood Lights, High Bays	All models are equipped with PIR occupancy sensing, high & low end bi-level dimming, & daylight sensing.
	S-TWC-90 + S-TWC-PIR-1 S-TWC-90 + S-TWC-PIR-BT S-TWC-90 + S-TWC-PIR-SL	Twist-C Control Sensor + 90 Degree Arm	Cylinders, Strips, Wall Packs	
	S-AUD-PIR-1 S-AUD-PIR-BT S-AUD-PIR-SL	2.5m Audio Jack	Panels & Troffers	
	S-SN-PIR-1 S-SN-PIR-BT S-SN-PIR-SL	Snap In Sensor	Troffers & Wraps	

### Group Controls ENVISIONLS Models Note : -BT • SILVAIR Models Note: -SL

	MODEL #	DESIGN	VOLTAGE	FEATURES	RECOMMENDED FEATURES
	S-CM-PIR-LV-BT S-CM-PIR-LV-SL	Ceiling Mounted PIR Sensor	12-24V	PIR Sensor, Bi-Level Dimming, Daylight, 360° detection, 12' Max Mounting Height	Connects to 0-10V dimmable fixtures
	S-WM-PIR-CUNV-BT S-WM-PIR-CUNV-SL	Wall Mounted PIR Occupancy Sensor, Bi-Level Dimming, Daylight	120-277V	On/Off PIR occupancy sensor, 180° detection, 30' detection @ 4' Mounting Height	Connects to LED fixtures
	S-WS-120V-USB-SL		120V	Dimming Wall Socket, Two Sockets	Floor Lamps, Other Lamps

### Gateway (Silvaire Only) 4.5–5.5 V DC, 2A Power over Ethernet 36–57 V DC

	MODEL #	DESIGN	VOLTAGE	FEATURES	RECOMMENDED FEATURES
	SGW-102	Wall or Ceiling Mounted	POE	Advanced Energy Monitoring Control	Connects to Silvaire Controls. Gateway is not required.

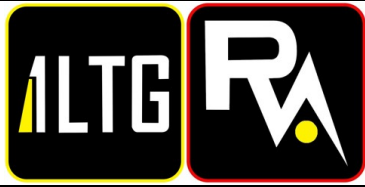

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-DH-HO

Line Item#: 135  
[Go to Bill of Materials](#)

Type: EM

Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Emergency Bug Eyes Square Models



Emergency



### Detail Specifications:

- Finish: White
- IP Rating: Dry Location
- Lumen Options
  - Standard: 3W 140LM
  - High Output: 6W 650LM
- Operating Temperature: -40° - 104° F
- Average life (L70) of 50,000 hours

### Applications:

- Exit Doors
- Corridor Intersections
- Exit Stairways
- Exit ramps

### Product Information:

- Built-in test switch and charge indicator light
- Overcharge and over-discharge protection
- Injection-molded thermoplastic housing, PC cover
- Backup Time: >90 minutes
- Recharge time: 24 hours

### Driver Options:

- Dual Voltage 120/277V
- PF >0.9, 50/60Hz
- Nickel Cadmium Battery 3.6V
- This fixture is non-dimmable

### Mounting & Installation:

- Wall and ceiling mounted
- Universal J-box mounting pattern

### Certifications:

- UL Listed for USA and CA (UL94V-0 Flame Rating)
- Meets UL924, NDPA 101
- Approved for CA T24
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

#### Series

**LED-EM-DH**

3W • 140Lm

**LED-EM-DH-HO**

6W • 650Lm

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 01.24



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-DH-HO

Line Item#: 135  
[Go to Bill of Materials](#)


Type: EM

Powered by 4submittal.com


**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Emergency Bug Eyes Square Models

### FEATURES

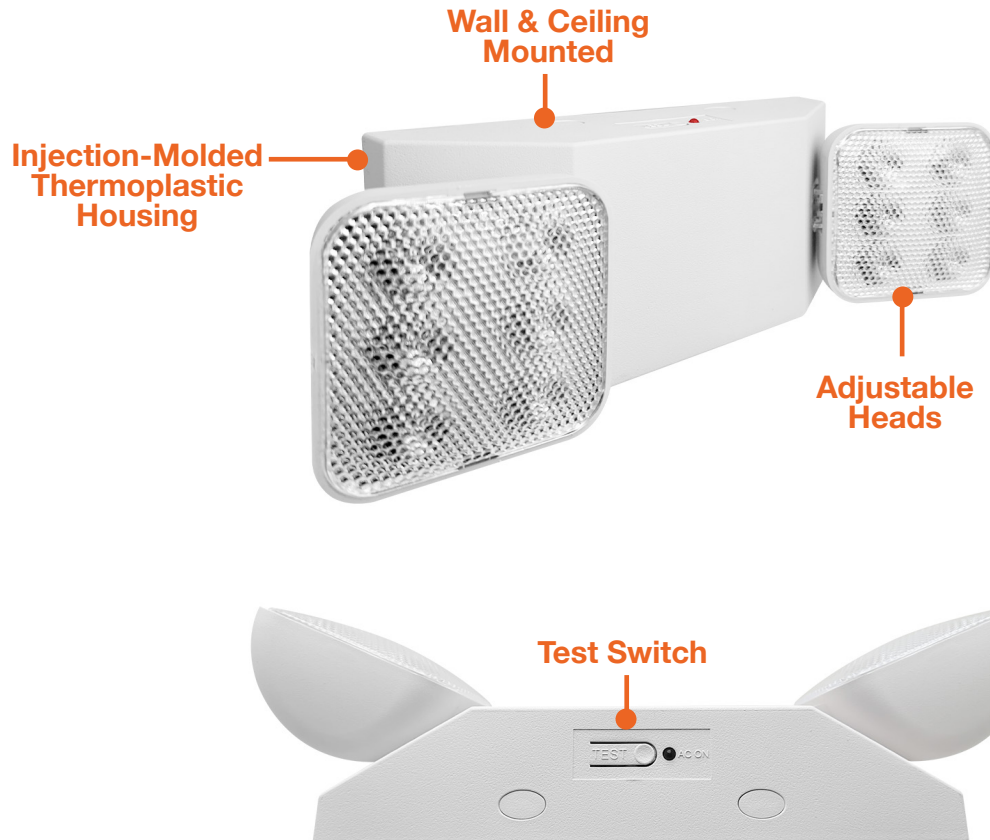


### DIMENSIONS

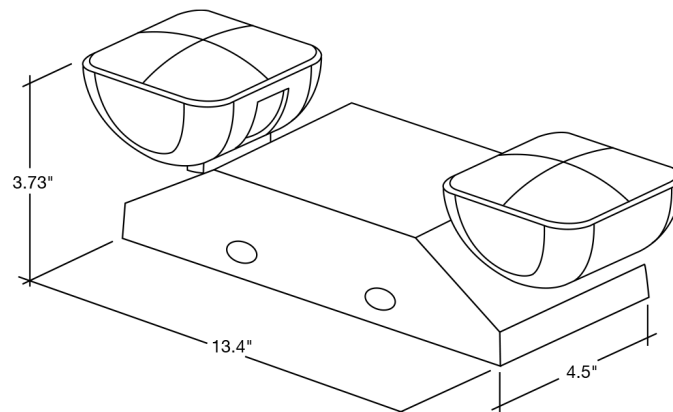

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

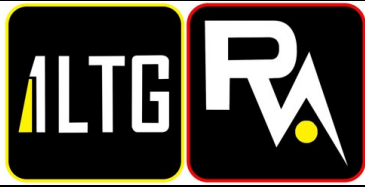

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-EXT-RG-WH-CMB-RC

Line Item#: 136  
[Go to Bill of Materials](#)

Type: EX/EM

Powered by 4submittal.com

**EnVisionLED**<sup>TM</sup>  
[WWW.ENVISIONLEDLIGHTING.COM](http://WWW.ENVISIONLEDLIGHTING.COM)

## Emergency Exit Sign With Bug Eyes



Project: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_

### Emergency Exit Signs



#### Detail Specifications:

- Finish: White Finish
- IP Rating: IP20, Dry Location
- Wattage: 3.5W
- Lumens: 140
- Operating Temperature: 32°F to 104°F
- Lens: Red or Green
- Remoted Capable
- Compatible with: LED-EM-RC-1, LED-EM-RC-2
- Average life (L70) of 50,000 hours

#### Applications:

- Exit Doors
- Corridor Intersections
- Exit Stairways
- Exit Ramps

#### Product Information:

- Built-in test switch and charge indicator
- Injection-molded thermoplastic housing, PC cover
- Backup Time: >90 minutes
- Recharge time: 24 hours
- Single Face
- 6" height letters with 3/4" stroke, viewable from 100ft away

#### Driver Options:

- Dual Voltage 120/277V
- PF >0.9, 50/60Hz

#### Mounting & Installations:

- Wall and ceiling mounted
- Universal J-box mounting pattern

#### Certifications:

- UL Listed for USA and CA (UL94V-0 Flame Rating)
- Meets UL924, NDPA 101
- Approved for CA T24
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

#### REMOTE HEAD OPTIONS

LED-EM-RC-1

LED-EM-RC-2

Series

**LED-EM-EXT-RG-WH-CMB-RC**

Red/Green Color Selectable

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 08.25





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-EXT-RG-WH-CMB-RC

Line Item#: 136  
[Go to Bill of Materials](#)


Type: EX/EM

Powered by 4submit.com


**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## Emergency Exit Sign With Bug Eyes

### FEATURES

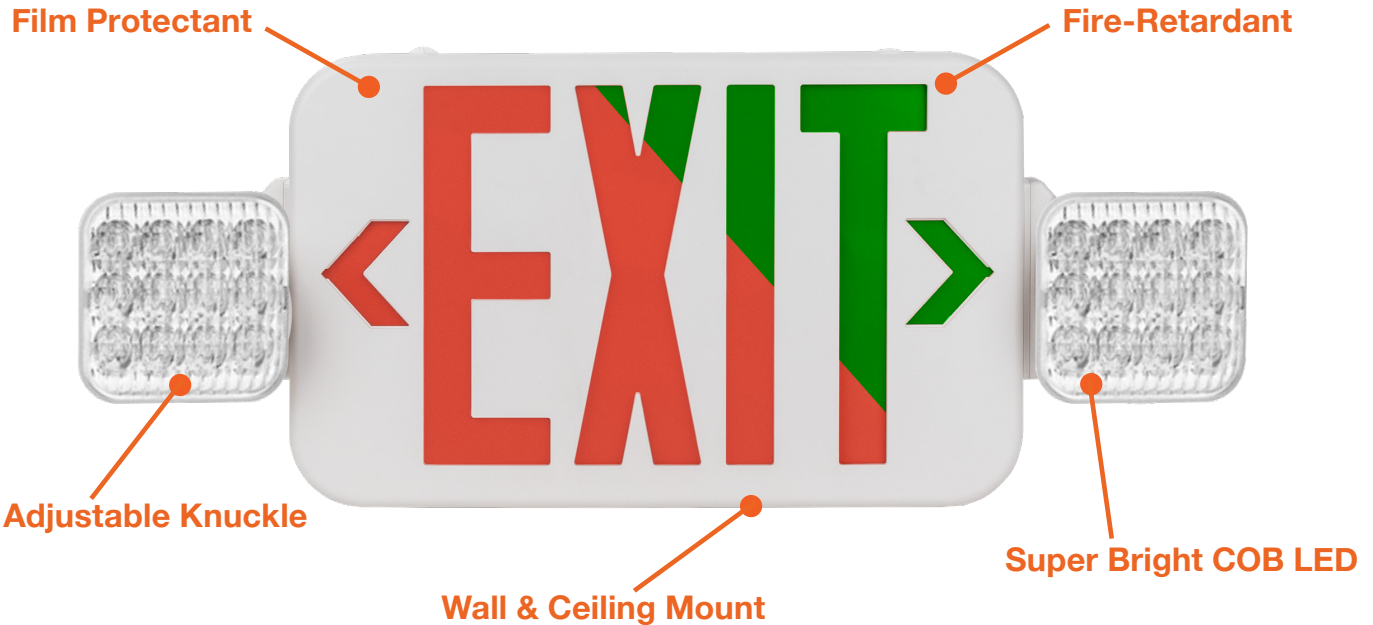

### DIMENSIONS

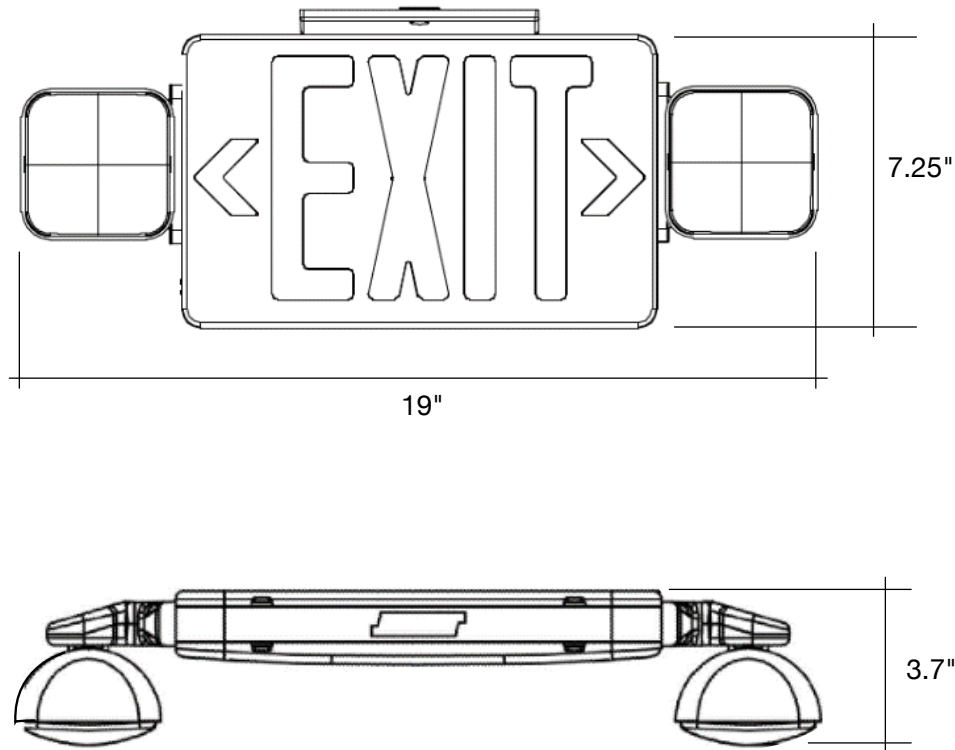


*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)



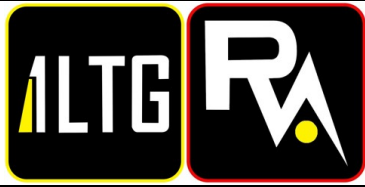

Date: 1/12/2026

Project:  
FINDLAY FLATSDescription:  
LED-CYE-UD-3-3P30-TRI-BL-PCLine Item#: 137  
[Go to Bill of Materials](#)

Type: WM1

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COMProject: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_

Area Lights



## M-Line: 3" Edge-Lit Cylinder Up/Down Light

### 3-CCT w/ Photocell



WATT	LUMENS
10	1,200
20	2,400
30	3,600

**Detail Specification:**

- Finish: Bronze, Black, White
- IP Rating: Wet Location IP65
- Beam Angle: 60°
- CCT: 30/40/50K Selectable
- Wattage: 30/20/10w
- Lumens: 3,600
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 122° F
- BUG: B2-U2-G2
- Lens: Clear glass with optics
- Average life (L70) of 50,000 hours

**Applications:**

- Dock and Loading
- Walkways & Pathways
- Parking Lots
- Hospitality, Multi-Family
- Outdoor Corridors
- General Outdoor Lighting
- Residential, Commercial and Industrial

**Product Information:**

- Sturdy die-cast aluminum housing finished with corrosion free powder coat
- Photocell included on each fixture. Easy disconnect.
- 1.5' STJW 18.3 AWG cable whip included
- Illuminates up and down and edge
- Select-n-Switch Technology: 3-CCT Selectable + 3-Power Selectable
- Instant-On to full brightness

**Driver Options:**

- UNV: 120-277V 0-10V Dimmable
- Built in 6Kv Surge Protector
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz

**Mounting & Installation:**

- Mounts to 3 or 4" J-box
- Covers a standard 4" recessed j-box

**Certifications:**


- UL Listed for USA and CA
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

**Series****LED-CYE-UD-3-3P30-TRI -**  
3" Up/Down Cylinder • 30/20/10W**Finish****BZ**  
Bronze  
**WH**  
White  
**BL**  
Black**Photocell****PC**  
Photocell  
is included.  
Easy quick  
disconnect.  
(PC-3/4-3PIN-LV)

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 10.23

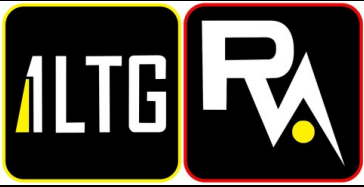

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-CYE-UD-3-3P30-TRI-BL-PC

Line Item#: 137  
[Go to Bill of Materials](#)

Type: WM1

Powered by 4submittal.com


**EnVisionLED**<sup>TM</sup>  
WWW.ENVISIONLEDLIGHTING.COM

## M-Line: 3" Edge-Lit Cylinder Up/Down Light 3-CCT w/ Photocell

### FEATURES




### DIMENSIONS

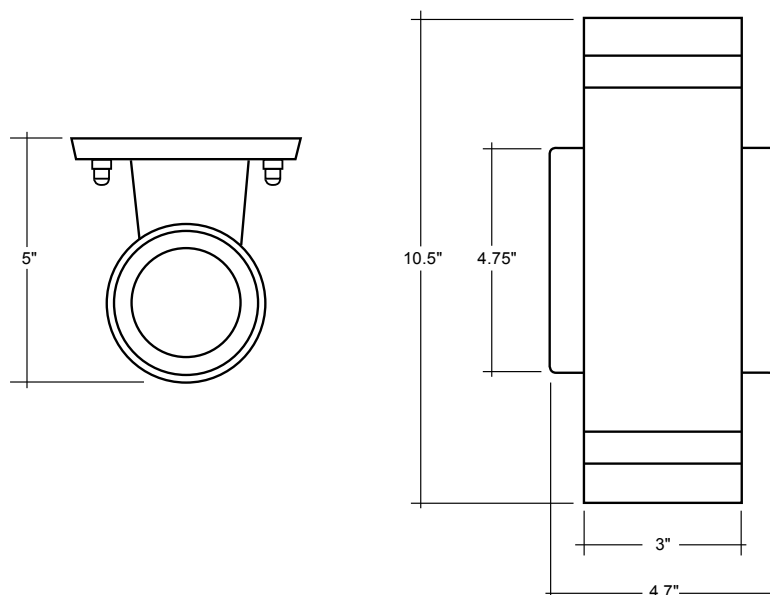

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

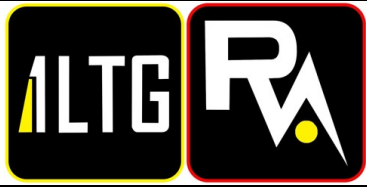

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-RC-1

Line Item#: 138  
[Go to Bill of Materials](#)

Type: RH1

Powered by 4submittal.com



Project: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_



## Single/Double Remote Head

### Product Information:

- Injection-Molded Thermoplastic ABS Housing
- 320 Lumens
- UL-940V-0 Flame Rating
- Wall and Ceiling Mounting
- Input Voltage: 3.6-24 VDC
- Super Bright SMD LED 2.4W
- IP Class: IP65
- Insulation: Class II
- Operating Temperature: 0°F ~ 104° F
- Remote Capable
- Compatible with but Not Limited to  
LED-EM-EXT-G-WH-CMB-RC  
or LED-EM-EXT-R-WH-CMB-R
- 5 Year Limited Warranty



#### 1 Product

LED-EM-RC Remote Head


#### 2 Head


Single 1  
Double 2

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)



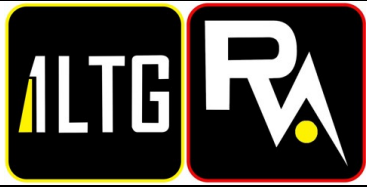

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-RC-1

Line Item#: 138  
[Go to Bill of Materials](#)

Type: RH1

Powered by 4submittal.com




## Single/Double Remote Head

### FEATURES



### FEATURES

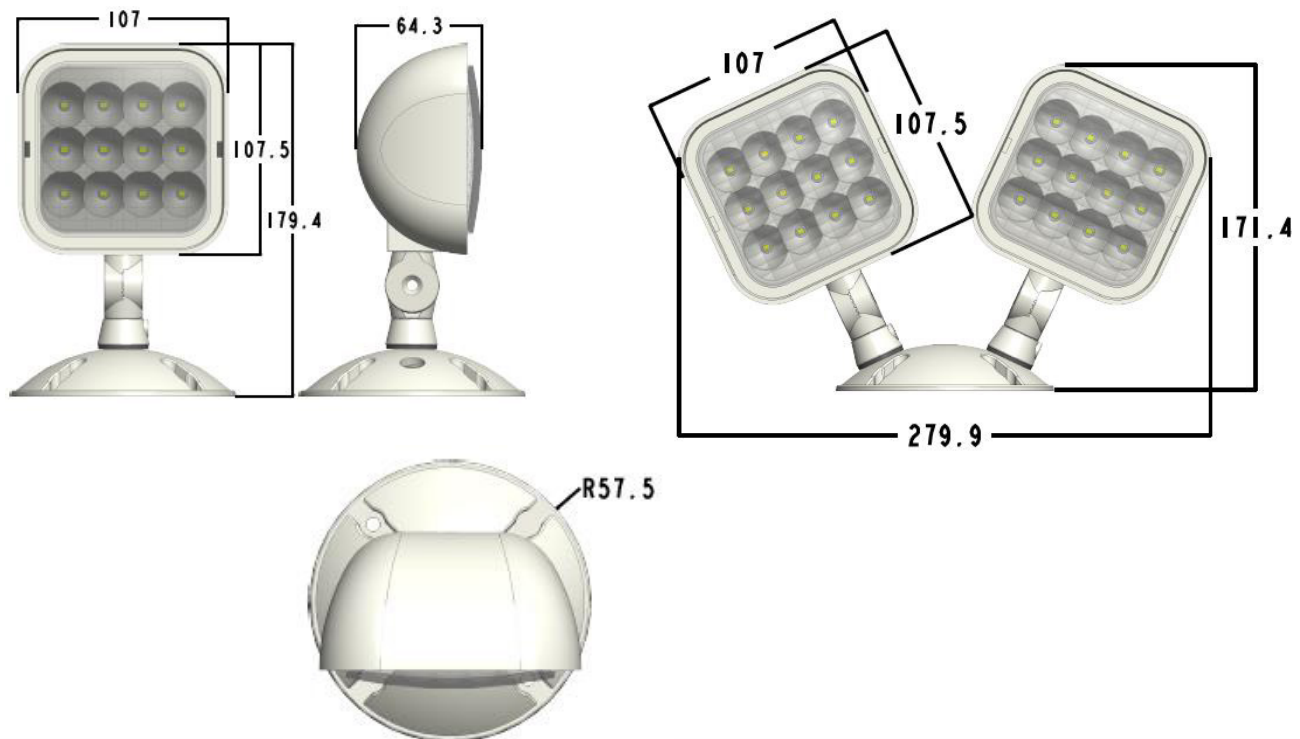

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)







Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 139  
[Go to Bill of Materials](#)

Type: SM3

Powered by 4submittal.com




LIGHTING | REINVENTED

plano **ARCH** PRO

## LDLL | Eclipse-II

Product Data Sheet

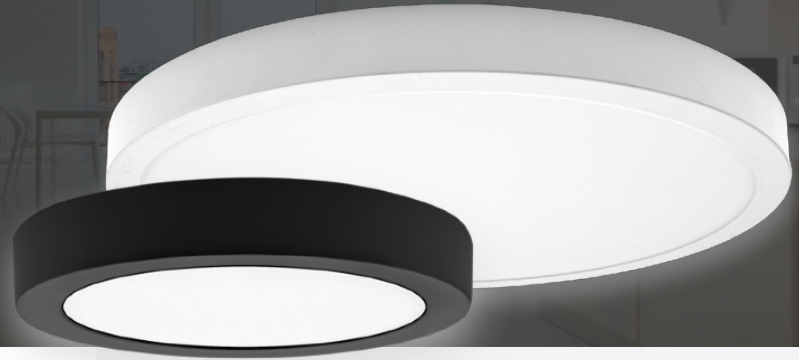

COMMERCIAL-GRADE

### LED Surface Mount Puck Downlight



CCTselect



TruColor Rendering

5" / 7" / 9" / 11" / 13"

#### Product Overview

**INTENDED USE** — The Eclipse-II Series is built for 5-way switchable CCT and is suitable for use in dry, damp, and wet locations, perfect for use in kitchens, hallways, stairways, bathrooms, closets, and just about anywhere you'd need it.

**CONSTRUCTION** — The die-cast aluminum housing is designed for durability and ruggedness.

**INSTALLATION** — Quick-mount aluminum backplate for easy installation.

**WARRANTY** — Featuring a no-compromise 5-year warranty, Energy Star and JA8-compliant, the Eclipse-II is a clean and modern solution for surface mounted driverless design.

ARCHIPELAGO luminaires and LED components undergo rigorous testing by an independent laboratory to meet IESNA LM-79 and LM-80 standards for light output and lumen maintenance. LED color temperature is warranted to shift no more than 180K over the standard warranty period. Correlated Color Temperature (CCT) follows the guidelines set forth in the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

#### Applications



Residential



Hallway



Patio



Entryway

#### Main Features

- Low-Profile Edge-Lit Surface Mount Design
- Durable Di-Cast Aluminum Trim w/ Frosted Lens
- For New Construction or Retrofit Applications
- Suitable for Use in Dry, Damp and Wet Locations
- Suitable for Use in Closets, In Accordance to NEC Guidelines
- Installs on Ceiling and Standard Junction Boxes
- Dimmable to 10% on Compatible TRIAC Dimmers
- 5-Year, 50,000 Hr Warranty
- CEC T24 JA8 Compliant
- NEC Compliant, Suitable for Use in Closet
- Energy Star Certified for 5", 7", 9"

#### Product Warranty\*

5-Year Warranty



50,000 Hrs



\* Standard warranty. Extended warranty available.

Archipelago Lighting, Inc.

| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

[Contact Us](#)





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W


Line Item#: 139  
[Go to Bill of Materials](#)

Type: SM3

Powered by 4submittal.com



LDLL | Eclipse-II

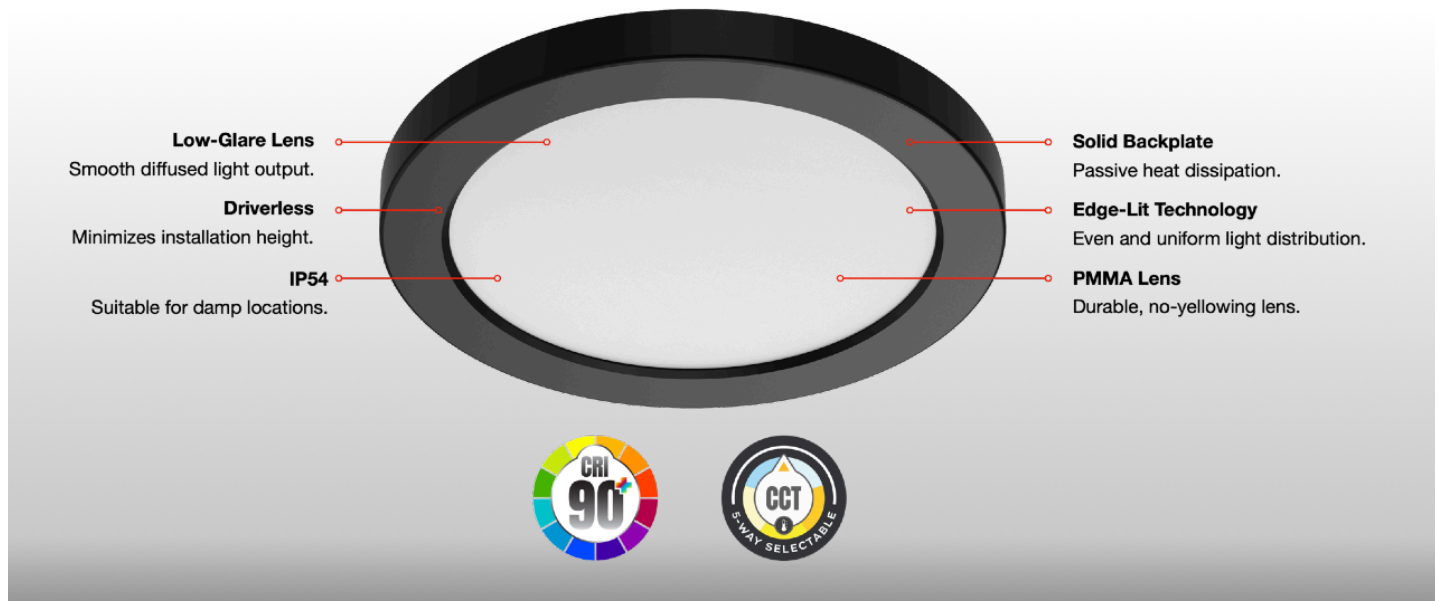

#### Ordering Guide<sup>1</sup>

Model Series	Size (in) / Wattage (W)	Series	CCTselect (K)	Finish Color
<b>LDLL</b> LED Surface Mount Puck Downlight	<b>0510</b> 5inch / 10W <b>0715</b> 7inch / 15W <b>0918</b> 9inch / 18W <b>1121</b> 11inch / 21W <b>1324</b> 13inch / 24W	- <b>E2</b> Eclipse-II	<b>S5</b> 5-CCTselect: 2700K 3000K 3500K 4000K 5000K	/ <b>B</b> Black <b>W</b> White
<b>CATALOG #:</b>				
<b>LDLL</b>		- <b>E2</b>	<b>S5</b>	/

#### Options Guide<sup>2</sup>

EM Driver <sup>3</sup>	Motion Sensor
<input type="checkbox"/> <b>EM15</b> 15W EM Driver <input type="checkbox"/> <b>CRCU</b> 15W EM Driver with Junction Box	<input type="checkbox"/> <b>MSP/W</b> PIR Bi-Level Sensor for 7" and 9" ONLY (White Finish)
<b>OPTIONAL ACCESSORIES #:</b>	

NOTE:

- Only one selection may be applicable within the same category.
- Multiple selections may be applicable within the same option category. See Compatible Accessories below for details.
- EM drivers only work with 7, 9, 11 and 13in fixtures

Archipelago Lighting, Inc.

| Headquarter: 4615 State Street, Montclair, CA 91763


| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220








	Date: 1/12/2026	Description: LDLL0510-E2S5/W	Line Item#: 139
	Project: FINDLAY FLATS		<a href="#">Go to Bill of Materials</a>
			Type: SM3
Powered by 4submittal.com			



LDLL | Eclipse-II

Sizing & Measurements


Model Series	Dimensions	Overall Diameter (in)	Depth (IN)
LDLL0510-E2		5.51	0.79
LDLL0715-E2		7.48	0.82
LDLL0918-E2		8.86	0.79
LDLL1121-E2		10.98	0.98
LDLL1124-E2		12.80	0.98

Recommended Dimmers

Make	Models			
Lutron	TG-600PR-WH S-600PR-WH CTCL-153PDH-WH	TGCL-153PH-LA SLV-600P-AL DV-600PR-WH	SCL-153PH-WH GT-600P DVCL-153P	MSCL-OP153M MACL-153M//MA-R PD-6WCL
Leviton	6672 IPL06	6674	DSL06	RNL06

Accessories (Standard)

Accessories (Optional)



<b>Mounting Bracket</b>	<b>Wire Nuts</b>	<b>Bolts</b>	<b>15W EM Driver</b>	<b>PIR Bi-Level Sensor</b>
Compatible to 2.75" or 3.50" Junction Box			EM15-HMB/170DC CRCU-EM/JBM	LDLL-E2/MSP/W

Archipelago Lighting, Inc.

| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 139  
[Go to Bill of Materials](#)


Type: SM3


Powered by 4submittal.com



LDLL | Eclipse-II

EM Driver / J-Box (Optional)

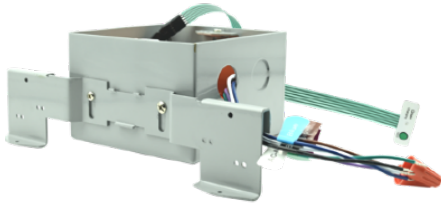

Technical Specification	CRCU-EM/JBM
Emergency Power	15W Max
Installation Method	Recessed
IP Rating	IP20
CEC T.24/JA8 Compliant	Yes
Color Finish	Grey
Physical Features	<ul style="list-style-type: none"><li>Directly connect to AC input</li><li>Fits 2.75" and 3.5" J-Box</li><li>Supports recessed in-ceiling mount</li></ul>
Self-Diagnostic Test Switch	<ol style="list-style-type: none"><li>Emergency conversion kit will go into emergency mode when test switch is pressed while main power is ON.</li><li>Will go into charging mode if test switch is not pressed.</li><li>In emergency mode, pressing the test switch for 3-seconds will inactivate emergency mode.</li></ol>
Indicator Status Light	<ol style="list-style-type: none"><li>Green ON: Charging mode / charging full</li><li>Green OFF: Mains power OFF / discharging mode</li></ol>
Dimension	<p>W4.29in x H2.96</p> 

Archipelago Lighting, Inc.


| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220

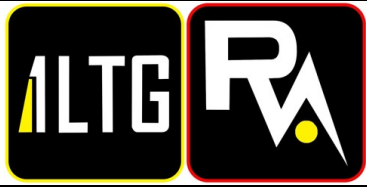

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-VT-ADJ-24-21W-5CCT-BN

Line Item#: 140  
[Go to Bill of Materials](#)

Type: V1

Powered by 4submittal.com


**EnVisionLED**<sup>TM</sup>  
WWW.ENVISIONLEDLIGHTING.COM

## Vanity Fixtures

### Square Adjustable Swivel



-BL

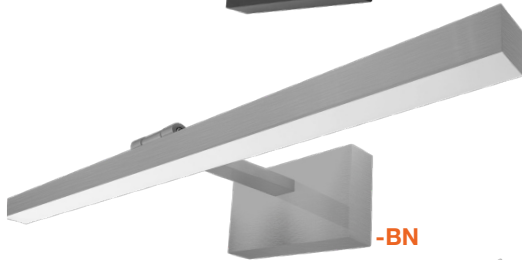

-BN



-CH



FRONT VIEW



90° Rotatable Angle

Vanity Fixture



#### Detail Specifications:

- Power: 21W
- Lumens: 2,700
- Finishes: Black, Brushed Nickel, Chrome
- IP Rating: IP54 Damp Location
- Beam Angle: 100°
- Chip: SMD 2835, R9 >50, CRI >90
- Operating Temperature: -40° - 114° F
- Lens: Frosted Acrylic, non-yellowing
- Average life (L70) of 50,000 hours

#### Applications:

- Bathrooms & Lavatories
- Hallways & Corridors
- Artwork, Museums
- Residential & Multifamily
- Education, Healthcare, Retail, Hospitality

#### Product Information:

- Available in 23.6" length
- Adjustable Angle: Lens swivels up and down
- Wide j-box for easier installation in retrofit and new construction applications
- Select-n-Switch Technology: 5-CCT Selectable

#### Driver Options:

- Triac & ELV dimmable down to 5%
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz
- Built in 2.5Kv Surge Protector
- Flicker Free

#### Mounting & Installations:

- 30/40 Junction Box
- Surface mount bracket included

#### Certifications:

- ETL Listed for USA and CA
- CA Title 24 JA8-2022 CEC Listed
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

#### Series

LED-VT-ADJ-24-21W-5CCT-BL

Black

LED-VT-ADJ-24-21W-5CCT-BN

Brushed Nickel

LED-VT-ADJ-24-21W-5CCT-CH


Chrome

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 04.25

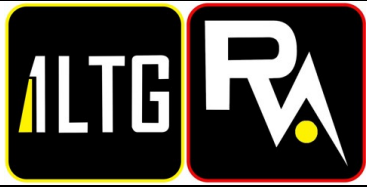

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-VT-ADJ-24-21W-5CCT-BN

Line Item#: 140  
[Go to Bill of Materials](#)

Type: V1

Powered by 4submittal.com

**EnVisionLED**<sup>TM</sup>  
WWW.ENVISIONLEDLIGHTING.COM


## Vanity Fixtures

### Square Adjustable Swivel

#### FEATURES




90° Rotatable Angle




5-CCT Selectable

#### MEASUREMENTS

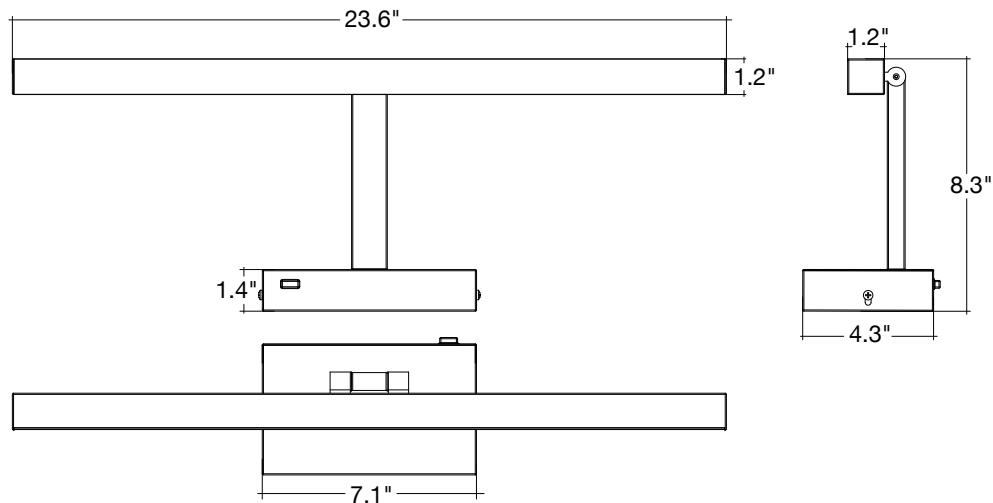

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

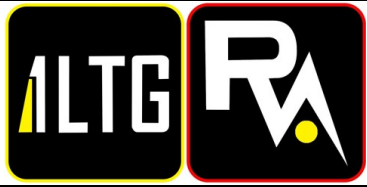

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 141  
[Go to Bill of Materials](#)

Type: SM2

Powered by 4submittal.com




LIGHTING | REINVENTED

plano **ARCH** PRO

## LDLL | Eclipse-II

Product Data Sheet

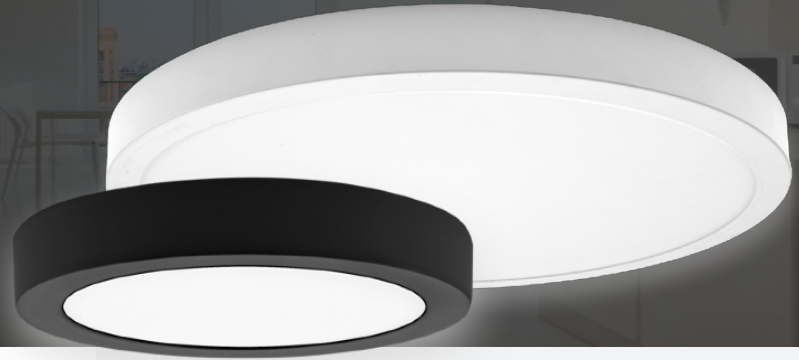

COMMERCIAL-GRADE

### LED Surface Mount Puck Downlight



CCTselect



TruColor Rendering

5" / 7" / 9" / 11" / 13"

#### Product Overview

**INTENDED USE** — The Eclipse-II Series is built for 5-way switchable CCT and is suitable for use in dry, damp, and wet locations, perfect for use in kitchens, hallways, stairways, bathrooms, closets, and just about anywhere you'd need it.

**CONSTRUCTION** — The die-cast aluminum housing is designed for durability and ruggedness.

**INSTALLATION** — Quick-mount aluminum backplate for easy installation.

**WARRANTY** — Featuring a no-compromise 5-year warranty, Energy Star and JA8-compliant, the Eclipse-II is a clean and modern solution for surface mounted driverless design.

ARCHIPELAGO luminaires and LED components undergo rigorous testing by an independent laboratory to meet IESNA LM-79 and LM-80 standards for light output and lumen maintenance. LED color temperature is warranted to shift no more than 180K over the standard warranty period. Correlated Color Temperature (CCT) follows the guidelines set forth in the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

#### Applications



Residential



Hallway



Patio



Entryway

#### Main Features

- Low-Profile Edge-Lit Surface Mount Design
- Durable Di-Cast Aluminum Trim w/ Frosted Lens
- For New Construction or Retrofit Applications
- Suitable for Use in Dry, Damp and Wet Locations
- Suitable for Use in Closets, In Accordance to NEC Guidelines
- Installs on Ceiling and Standard Junction Boxes
- Dimmable to 10% on Compatible TRIAC Dimmers
- 5-Year, 50,000 Hr Warranty
- CEC T24 JA8 Compliant
- NEC Compliant, Suitable for Use in Closet
- Energy Star Certified for 5", 7", 9"

#### Product Warranty\*

5-Year Warranty



50,000 Hrs



\* Standard warranty. Extended warranty available.

Archipelago Lighting, Inc.

| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

[Contact Us](#)





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W


Line Item#: 141  
[Go to Bill of Materials](#)

Type: SM2

Powered by 4submittal.com



LDLL | Eclipse-II

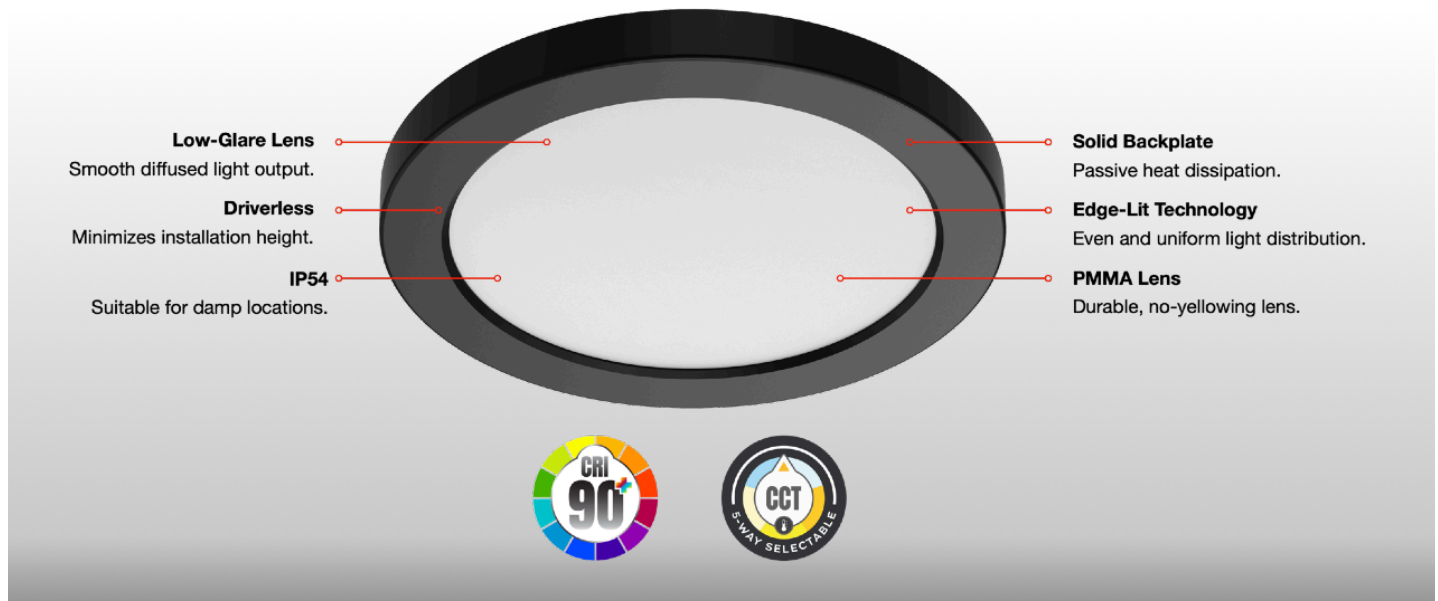

#### Ordering Guide<sup>1</sup>

Model Series	Size (in) / Wattage (W)	Series	CCTselect (K)	Finish Color
<b>LDLL</b> LED Surface Mount Puck Downlight	<b>0510</b> 5inch / 10W <b>0715</b> 7inch / 15W <b>0918</b> 9inch / 18W <b>1121</b> 11inch / 21W <b>1324</b> 13inch / 24W	- <b>E2</b> Eclipse-II	<b>S5</b> 5-CCTselect: 2700K 3000K 3500K 4000K 5000K	/ <b>B</b> Black <b>W</b> White
<b>CATALOG #:</b>				
<b>LDLL</b>		- <b>E2</b>	<b>S5</b>	/

#### Options Guide<sup>2</sup>

EM Driver <sup>3</sup>	Motion Sensor
<input type="checkbox"/> <b>EM15</b> 15W EM Driver <input type="checkbox"/> <b>CRCU</b> 15W EM Driver with Junction Box	<input type="checkbox"/> <b>MSP/W</b> PIR Bi-Level Sensor for 7" and 9" ONLY (White Finish)
<b>OPTIONAL ACCESSORIES #:</b>	

NOTE:

1. Only one selection may be applicable within the same category.
2. Multiple selections may be applicable within the same option category. See Compatible Accessories below for details.
3. EM drivers only work with 7, 9, 11 and 13in fixtures

Archipelago Lighting, Inc.

| Headquarter: 4615 State Street, Montclair, CA 91763


| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220








	Date: 1/12/2026	Description: LDLL0510-E2S5/W	Line Item#: 141
	Project: FINDLAY FLATS		<a href="#">Go to Bill of Materials</a>
			Type: SM2
Powered by 4submittal.com			



LDLL | Eclipse-II

Sizing & Measurements


Model Series	Dimensions	Overall Diameter (in)	Depth (IN)
LDLL0510-E2		5.51	0.79
LDLL0715-E2		7.48	0.82
LDLL0918-E2		8.86	0.79
LDLL1121-E2		10.98	0.98
LDLL1124-E2		12.80	0.98

Recommended Dimmers

Make	Models			
Lutron	TG-600PR-WH S-600PR-WH CTCL-153PDH-WH	TGCL-153PH-LA SLV-600P-AL DV-600PR-WH	SCL-153PH-WH GT-600P DVCL-153P	MSCL-OP153M MACL-153M//MA-R PD-6WCL
Leviton	6672 IPL06	6674	DSL06	RNL06

Accessories (Standard)

Accessories (Optional)



<b>Mounting Bracket</b>	<b>Wire Nuts</b>	<b>Bolts</b>	<b>15W EM Driver</b>	<b>PIR Bi-Level Sensor</b>
Compatible to 2.75" or 3.50" Junction Box			EM15-HMB/170DC CRCU-EM/JBM	LDLL-E2/MSP/W

Archipelago Lighting, Inc.


| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220


	Date: 1/12/2026	<b>Description:</b> LDLL0510-E2S5/W	Line Item#: 141
	Project: FINDLAY FLATS		<a href="#">Go to Bill of Materials</a>
			Type: SM2


Powered by 4submittal.com



LDLL | Eclipse-II

EM Driver / J-Box (Optional)

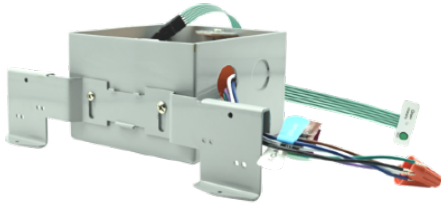


Technical Specification	CRCU-EM/JBM
Emergency Power	15W Max
Installation Method	Recessed
IP Rating	IP20
CEC T.24/JA8 Compliant	Yes
Color Finish	Grey
Physical Features	<ul style="list-style-type: none"> <li>Directly connect to AC input</li> <li>Fits 2.75" and 3.5" J-Box</li> <li>Supports recessed in-ceiling mount</li> </ul>
Self-Diagnostic Test Switch	<ol style="list-style-type: none"> <li>Emergency conversion kit will go into emergency mode when test switch is pressed while main power is ON.</li> <li>Will go into charging mode if test switch is not pressed.</li> <li>In emergency mode, pressing the test switch for 3-seconds will inactivate emergency mode.</li> </ol>
Indicator Status Light	<ol style="list-style-type: none"> <li>Green ON: Charging mode / charging full</li> <li>Green OFF: Mains power OFF / discharging mode</li> </ol>
Dimension	<p>W4.29in x H2.96</p> 

Archipelago Lighting, Inc.

| **Headquarter:** 4615 State Street, Montclair, CA 91763  
 | **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)  
 +1 (866) 912-3220

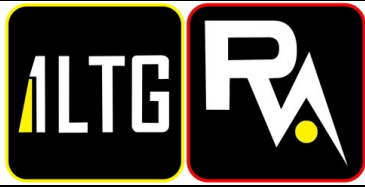

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 142  
[Go to Bill of Materials](#)

Type: SM1

Powered by 4submittal.com




LIGHTING | REINVENTED

plano **ARCH** PRO

## LDLL | Eclipse-II

Product Data Sheet

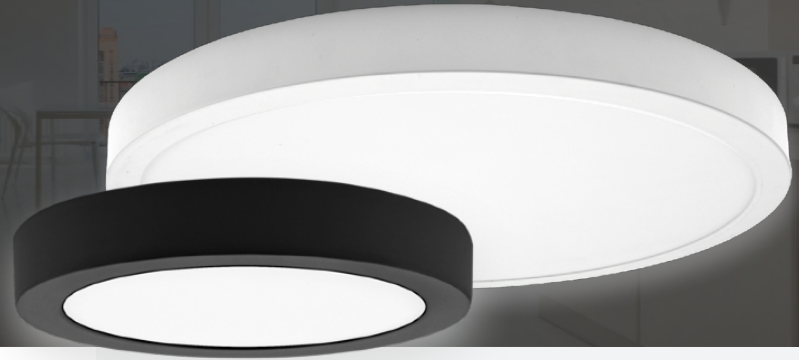

COMMERCIAL-GRADE

### LED Surface Mount Puck Downlight



CCTselect



TruColor Rendering

5" / 7" / 9" / 11" / 13"

#### Product Overview

**INTENDED USE** — The Eclipse-II Series is built for 5-way switchable CCT and is suitable for use in dry, damp, and wet locations, perfect for use in kitchens, hallways, stairways, bathrooms, closets, and just about anywhere you'd need it.

**CONSTRUCTION** — The die-cast aluminum housing is designed for durability and ruggedness.

**INSTALLATION** — Quick-mount aluminum backplate for easy installation.

**WARRANTY** — Featuring a no-compromise 5-year warranty, Energy Star and JA8-compliant, the Eclipse-II is a clean and modern solution for surface mounted driverless design.

ARCHIPELAGO luminaires and LED components undergo rigorous testing by an independent laboratory to meet IESNA LM-79 and LM-80 standards for light output and lumen maintenance. LED color temperature is warranted to shift no more than 180K over the standard warranty period. Correlated Color Temperature (CCT) follows the guidelines set forth in the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

#### Applications



Residential



Hallway



Patio



Entryway

#### Main Features

- Low-Profile Edge-Lit Surface Mount Design
- Durable Di-Cast Aluminum Trim w/ Frosted Lens
- For New Construction or Retrofit Applications
- Suitable for Use in Dry, Damp and Wet Locations
- Suitable for Use in Closets, In Accordance to NEC Guidelines
- Installs on Ceiling and Standard Junction Boxes
- Dimmable to 10% on Compatible TRIAC Dimmers
- 5-Year, 50,000 Hr Warranty
- CEC T24 JA8 Compliant
- NEC Compliant, Suitable for Use in Closet
- Energy Star Certified for 5", 7", 9"

#### Product Warranty\*

5-Year Warranty



50,000 Hrs



\* Standard warranty. Extended warranty available.

Archipelago Lighting, Inc.


| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

[Contact Us](#)



LDLL | Eclipse-II



Project Details





Project Name:

Fixture Schedule:

Project Number:

Notes:

Highlights

Features		Description
5-CCTselect		CCT selectable: 5-way dip-switch
Sensor Ready		Optional plug-n-play motion sensor available on 7" and 9"
TruColor High CRI		Title 24 Compliant. JA8 LED 90CRI+
Limited Warranty		5-Year Warranty

Key Specifications

- Input Voltage: 120V
- Dimming: TRIAC
- Efficacy: ≤103lm/W
- IP: Suitable for Wet Location
- Housing: Die-Cast Aluminum
- Power Factor (PF): >0.9 Non-Flicker
- Operating Temperature: -4°F - 113°F
- Total Harmonic Distortion (THD): <20%
- Beam Angle (°): 120°

Certifications



Model Specifications

Model	Size (in)	Wattage (W)	Lumen (lm)	Efficacy (lm/W)	5-CCTselect (K) <sup>1</sup>	Voltage (V)	CRI
LDLL0510	5"	10W	671lm	67lm/W	2700K	120V	90CRI+
			675lm	68lm/W	3000K		
			698lm	70lm/W	3500K		
			712lm	71lm/W	4000K		
			689lm	69lm/W	5000K		
LDLL0715	7"	15W	1,187lm	79lm/W	2700K		
			1,205lm	80lm/W	3000K		
			1,211lm	81lm/W	3500K		
			1,257lm	84lm/W	4000K		
			1,241lm	83lm/W	5000K		
LDLL0918	9"	18W	1,409lm	78lm/W	2700K		
			1,415lm	79lm/W	3000K		
			1,436lm	80lm/W	3500K		
			1,460lm	81lm/W	4000K		
			1,442lm	80lm/W	5000K		
LDLL1121	11"	21W	2,022lm	96lm/W	2700K		
			2,035lm	97lm/W	3000K		
			2,054lm	98lm/W	3500K		
			2,165lm	103lm/W	4000K		
			2,159lm	103lm/W	5000K		
LDLL1324	13"	24W	2,393lm	100lm/W	2700K		
			2,407lm	100lm/W	3000K		
			2,450lm	102lm/W	3500K		
			2,455lm	102lm/W	4000K		
			2,446lm	102lm/W	5000K		

1. Default settings on CCTselect is highest CCT available.

Archipelago Lighting, Inc.

Headquarter: 4615 State Street, Montclair, CA 91763  
USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)  
+1 (866) 912-3220



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 142  
[Go to Bill of Materials](#)

Type: SM1

Powered by 4submittal.com



LDLL | Eclipse-II

**Low-Glare Lens**  
Smooth diffused light output.

**Driverless**  
Minimizes installation height.

**IP54**  
Suitable for damp locations.

**Solid Backplate**  
Passive heat dissipation.

**Edge-Lit Technology**  
Even and uniform light distribution.

**PMMA Lens**  
Durable, no-yellowing lens.



#### Ordering Guide<sup>1</sup>

Model Series	Size (in) / Wattage (W)	Series	CCTselect (K)	Finish Color
<b>LDLL</b> LED Surface Mount Puck Downlight	<b>0510</b> 5inch / 10W <b>0715</b> 7inch / 15W <b>0918</b> 9inch / 18W <b>1121</b> 11inch / 21W <b>1324</b> 13inch / 24W	- <b>E2</b> Eclipse-II	<b>S5</b> 5-CCTselect: 2700K 3000K 3500K 4000K 5000K	/ <b>B</b> Black <b>W</b> White
<b>CATALOG #:</b>				
<b>LDLL</b>		- <b>E2</b>	<b>S5</b>	/

#### Options Guide<sup>2</sup>

EM Driver <sup>3</sup>	Motion Sensor
<input type="checkbox"/> <b>EM15</b> 15W EM Driver <input type="checkbox"/> <b>CRCU</b> 15W EM Driver with Junction Box	<input type="checkbox"/> <b>MSP/W</b> PIR Bi-Level Sensor for 7" and 9" ONLY (White Finish)
<b>OPTIONAL ACCESSORIES #:</b>	

**NOTE:**

- Only one selection may be applicable within the same category.
- Multiple selections may be applicable within the same option category. See Compatible Accessories below for details.
- EM drivers only work with 7, 9, 11 and 13in fixtures

#### Archipelago Lighting, Inc.


| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

#### Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)






+1 (866) 912-3220

	Date: 1/12/2026	Description: LDLL0510-E2S5/W	Line Item#: 142
	Project: FINDLAY FLATS		<a href="#">Go to Bill of Materials</a>
			Type: SM1
Powered by 4submittal.com			



LDLL | Eclipse-II

Sizing & Measurements


Model Series	Dimensions	Overall Diameter (in)	Depth (IN)
LDLL0510-E2		5.51	0.79
LDLL0715-E2		7.48	0.82
LDLL0918-E2		8.86	0.79
LDLL1121-E2		10.98	0.98
LDLL1124-E2		12.80	0.98

Recommended Dimmers

Make	Models			
Lutron	TG-600PR-WH S-600PR-WH CTCL-153PDH-WH	TGCL-153PH-LA SLV-600P-AL DV-600PR-WH	SCL-153PH-WH GT-600P DVCL-153P	MSCL-OP153M MACL-153M//MA-R PD-6WCL
Leviton	6672 IPL06	6674	DSL06	RNL06

Accessories (Standard)

Accessories (Optional)



<b>Mounting Bracket</b>	<b>Wire Nuts</b>	<b>Bolts</b>	<b>15W EM Driver</b>	<b>PIR Bi-Level Sensor</b>
Compatible to 2.75" or 3.50" Junction Box			EM15-HMB/170DC CRCU-EM/JBM	LDLL-E2/MSP/W



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 142  
[Go to Bill of Materials](#)


Type: SM1


Powered by 4submittal.com



LDLL | Eclipse-II

EM Driver / J-Box (Optional)

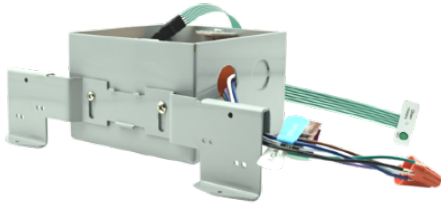

Technical Specification	CRCU-EM/JBM
Emergency Power	15W Max
Installation Method	Recessed
IP Rating	IP20
CEC T.24/JA8 Compliant	Yes
Color Finish	Grey
Physical Features	<ul style="list-style-type: none"><li>Directly connect to AC input</li><li>Fits 2.75" and 3.5" J-Box</li><li>Supports recessed in-ceiling mount</li></ul>
Self-Diagnostic Test Switch	<ol style="list-style-type: none"><li>Emergency conversion kit will go into emergency mode when test switch is pressed while main power is ON.</li><li>Will go into charging mode if test switch is not pressed.</li><li>In emergency mode, pressing the test switch for 3-seconds will inactivate emergency mode.</li></ol>
Indicator Status Light	<ol style="list-style-type: none"><li>Green ON: Charging mode / charging full</li><li>Green OFF: Mains power OFF / discharging mode</li></ol>
Dimension	<p>W4.29in x H2.96</p> 

Archipelago Lighting, Inc.

| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220





Date: 1/12/2026

Project:  
FINDLAY FLATSDescription:  
LED-RST-4FT-3M40W-4CCT-SRLine Item#: 144  
[Go to Bill of Materials](#)

Type: ST1

Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Round LED Strip Fixtures

### 5-CCT & 3-Power Selectable

### Sensor Ready



3M25W		3M40W		3M60W		3M80W		3M100W	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
15	2,100	20	2,600	40	5,200	50	6,500	70	9,100
20	2,800	30	3,900	50	6,500	65	8,450	85	11,050
25	3,500	40	5,200	60	7,800	80	10,400	100	13,000

Project: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_

Strips

**Detail Specification:**

- Finish: White, Custom finishes available
- IP Rating: Damp Location (IP44)
- Beam Angle: 130°
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 122° F
- Lens: Round Acrylic Frosted Lens
- Average life (L70) of 50,000 hours

**Applications:**

- Stairwell & Hallways
- Utility & Storage
- Garage Structures
- Office and Meeting Rooms
- Shop Lighting
- Commercial and Industrial

**Product Information:**

- Aluminum housing finished with corrosion free power coat
- Easy j-box access: snap on and off tool-less design
- 40 J-box cover included with every fixture
- Audio Jack Sensor Ready (with RST-SR bracket)
- Sensor Options:
  - Standard Sensors
  - SILVAIR Bluetooth Mesh
  - ENVISIONLS Bluetooth
  - [Click Here](#) for More Information

**Driver Options:**

- UNV: 120-277V 0-10V Dimmable
- Optional 347-480V step down transformer available
- THD: <15% (+/-5% tolerance), PF >0.9, 50/60Hz
- 12V low voltage aux output for controls
- Flicker Free

**Mounting & Installation**

- Surface mount into 30 or 40 j-box
- Optional 10' & 20' suspension kit available
- Optional 6' chain mount available
- Rated for installation in closets

**Certifications**

- UL Listed for USA and CA
- DLC Premium Listed
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

Series	Sensor <sup>1</sup>	Emergency <sup>2</sup>	Finish <sup>3</sup>	Flex
LED-RST-2FT-3M25W-5CCT-SR	(Blank)	(Blank)	(Blank)	(Blank)
LED-RST-4FT-3M40W-5CCT-SR	No Sensor	No Emergency	White	No Flex
LED-RST-4FT-3M80W-5CCT-SR	BMS <sup>1</sup>	Backup	BL	6FLX
LED-RST-8FT-3M60W-5CCT-SR	Microwave	EMB	Black	6' Flex
LED-RST-8FT-3M100W-5CCT-SR	Bi-Level Motion	Emergency	GRY <sup>3</sup>	Whip
	+ Daylight Sensor	Backup	Gray	
	(Internal Sensor)	EMB20	BRZ <sup>3</sup>	
	BMSPIR	Emergency	Bronze	
	Available for field install.	Backup (20W)	CS <sup>3</sup>	
			Custom Color	

1. Sensor Note:  
Microwave: Detects motion through barriers such as walls, and doors. Ideal for applications where obstacles might obstruct the line of sight. Works effectively outdoors, in large open spaces, & parking lots. Do not use in areas of high vibrations or metal.  
PIR: Ideal for indoor environments with clear lines of sight to the area of interest. Detects warm objects, like a person or animal. Good for high vibration, areas of metal.

2. Standard emergency is 8W (1,040LM). 20W available, inquire factory

3. Standard quick ship finish is white & black. Other colors are custom finishes.

**Optional Accessories (Order Separately)**


Sensors	Suspension Kit	Accessories	Wire Guards
<b>RST-SR</b> Receptacle for Sensor (Required for below sensors)	<b>SK-10FT-Y-LC-PD</b> 10' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)	<b>RST-SM-CN</b> Surface mount linkable bracket	<b>RST-2FT-WG</b> 2ft Wire Guard
<b>S-AUD-PIR-1</b> PIR Bi-Level Motion + Daylight Sensor Remote Required: (S-LINE-R)	<b>SK-20FT-Y-LC-PD</b> 20' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)	<b>RST-PDM-CN</b> Pendant mount linkable bracket	<b>RST-4FT-WG</b> Wire Guard (order 2 for 8ft fixtures)
<b>S-AUD-PIR-BT</b> PIR ENVISIONLS Bluetooth Control			
<b>S-AUD-PIR-SL</b> PIR SILVAIR Bluetooth Mesh			

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 10.25

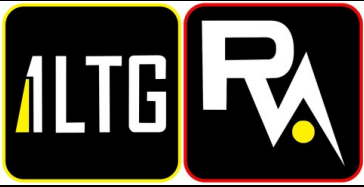

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-RST-4FT-3M40W-4CCT-SR

Line Item#: 144  
[Go to Bill of Materials](#)

Type: ST1


Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM


## Round LED Strip Fixtures


### 5-CCT & 3-Power Selectable

#### FEATURES

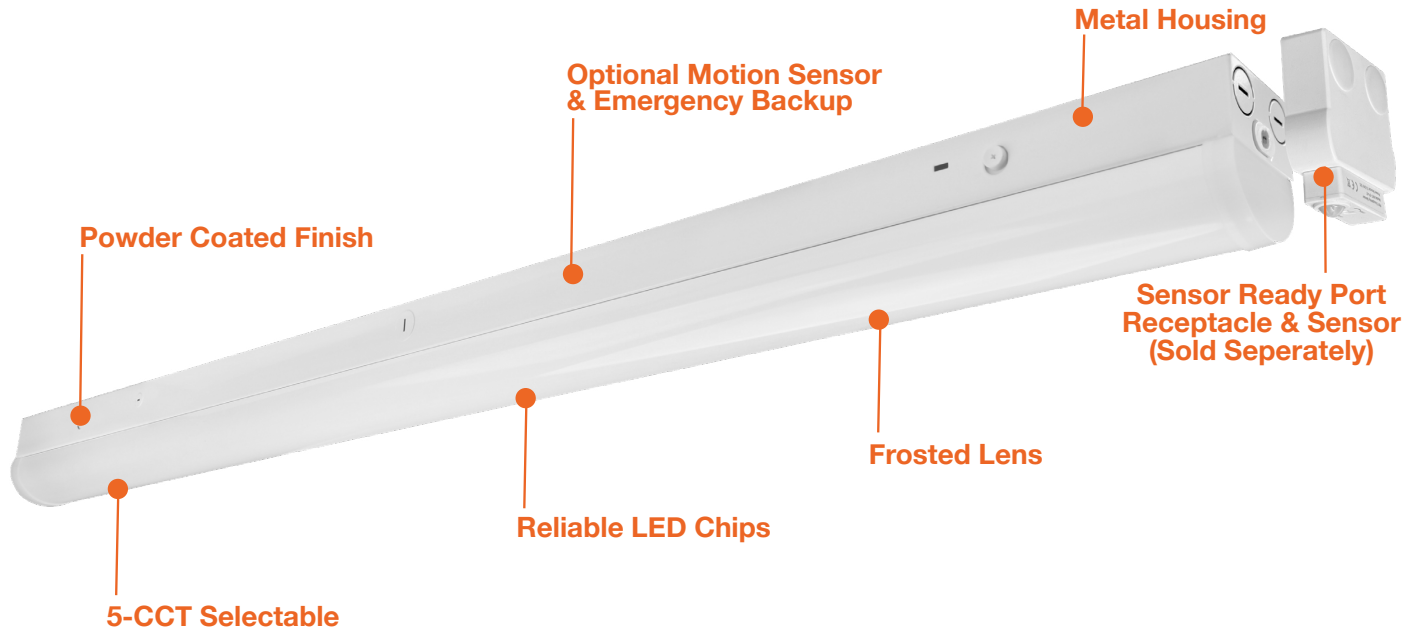

#### DIMENSIONS

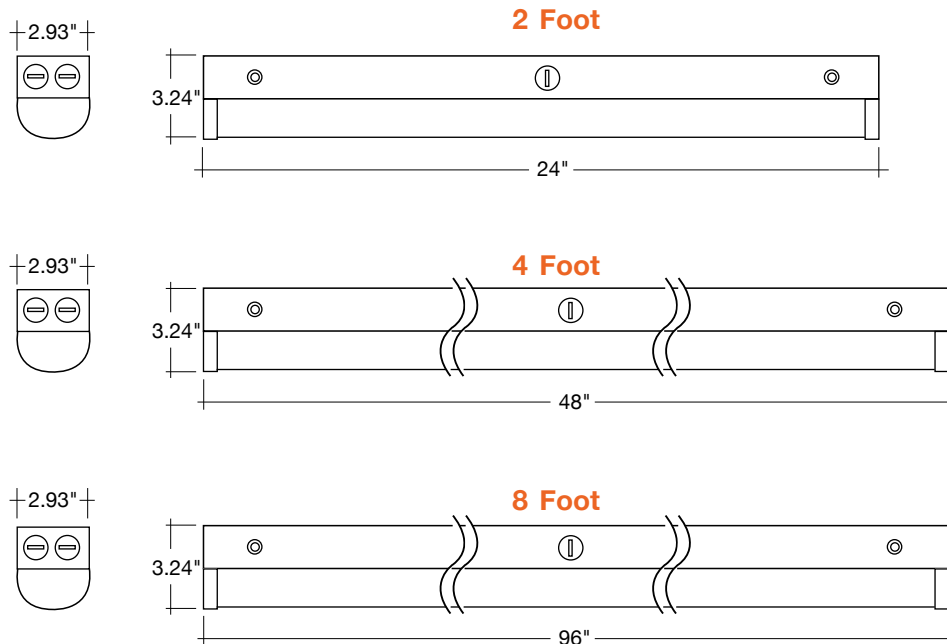

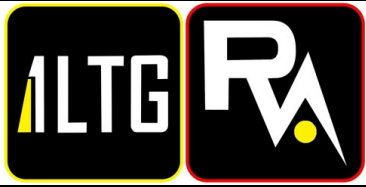

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-RST-4FT-3M40W-4CCT-SR

Line Item#: 144  
[Go to Bill of Materials](#)

Type: ST1

Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Round LED Strip Fixtures G3

### 4-CCT & 3-Power Selectable

#### ACCESSORIES



RST-SR



S-AUD-PIR-1  
S-AUD-PIR-BT  
S-AUD-PIR-SL



SK-10FT-Y-LC-PD  
SK-20FT-Y-LC-PD




RST-SM-CN




RST-PDM-CN




RST-2FT-WG  
RST-4FT-WG

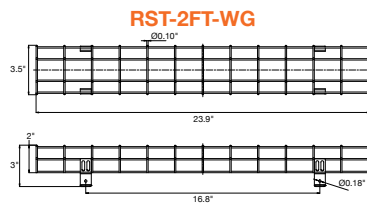

RST-2FT-WG

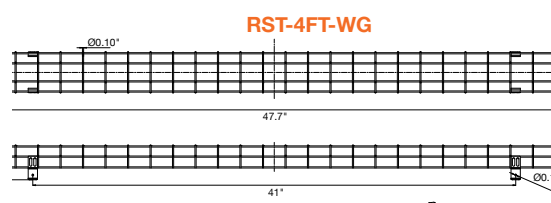

RST-4FT-WG



2-RST-4FT-WG FOR 8FT



Model	Voltage	Watts	Lumens	Color	CRI
LED-RST-2FT-3M25W-5CCT-SR	120-277V	25/20/15w	3,500/2,800/2,100	30/35/40/50/65k	>80
LED-RST-4FT-3M40W-5CCT-SR	120-277V	40/30/20w	5,200/3,900/2,600	30/35/40/50/65k	>80
LED-RST-4FT-3M80W-5CCT-SR	120-277V	80/65/50w	10,400/8,450/6,500	30/35/40/50/65k	>80
LED-RST-8FT-3M60W-5CCT-SR	120-277V	60/50/40w	7,800/6,500/5,200	30/35/40/50/65k	>80
LED-RST-8FT-3M100W-5CCT-SR	120-277V	100/85/70w	13,000/11,050/9,100	30/35/40/50/65k	>80

#### SENSORS

Pre-Installed Accessory Model	Description
RST-SR	Sensor Receptacle (REQUIRED)
S-AUD-PIR-1	PIR Bi-Level + Daylight: Audio Jack
S-AUD-PIR-BT	PIR Bi-Level + Daylight: Audio Jack Bluetooth EnVisionLS App
S-AUD-PIR-SL	PIR Bi-Level + Daylight: Audio Jack SILVAIR

#### SUSPENSION KIT


Model	Description
SK-10FT-Y-LC-PD	10' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)
SK-20FT-Y-LC-PD	20' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)

#### ACCESSORIES

Model	Description
RST-SM-CN	Surface Mount Linkable Bracket
RST-PDM-CN	Pendant Mount Linkable Bracket

#### WIRE GUARDS

Model	Description
RST-2FT-WG	2ft Wire Guard
RST-4FT-WG	4ft Wire Guard (order 2 for 8ft fixtures)

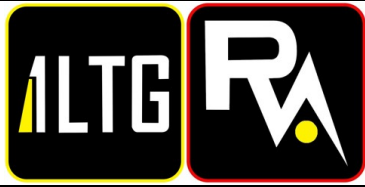

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-RST-4FT-3M40W-4CCT-SR









Line Item#: 144  
[Go to Bill of Materials](#)

Type: ST1


Powered by 4submittal.com

## EnVisionLED™ Control Options

EnVision LED offers 3 control systems compatible with our LED Fixtures for projects of all sizes and budgets.

	Basic Controls	EnVisionLS 	EnVisionLED™ x SILVAIR 
<b>Description</b>	Standard Plug In Sensors	Basic Bluetooth Wireless Control	Advanced Bluetooth Wireless Control
<b>Recommended Quantity</b> (but not limited to)	N/A	>40-50 Nodes	>50 Nodes
<b>Maximum Zone Quantity</b>	N/A	100	3,000
<b>Commissioning Tool</b>	Remote Only	  ENVISIONLS App 	  SILVAIR App 
<b>Commissioning Process</b>	Individually Set via Remote	Wireless Must be done on site	Wireless- Initial linking must be done on site. Commissioning can be done via desktop remotely.
<b>Floor Plan Upload</b>	N/A	N/A	Yes Add a floor plan and mark luminaires & zones via desktop
<b>Gateway</b>	N/A	N/A	Required only for energy monitoring, advanced scheduling, automated demand response.
<b>Individual Luminaire Control</b>	Yes	Yes	Yes
<b>Luminaire Grouping Zoning</b>	N/A	Yes	Yes
<b>High End Power Low End Power</b>	Yes but limited (View Remote)	Yes	Yes
<b>Cost</b>	\$	\$\$	\$\$\$
<b>DLC NLC Listed</b>	N/A	Yes	Yes
<b>Energy Monitoring &amp; Data Reporting</b>	N/A	N/A	Monitor energy usage per individual zone & retrofit cost savings calculation + detailed reporting



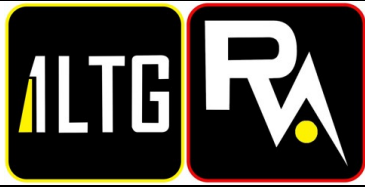

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-RST-4FT-3M40W-4CCT-SR

Line Item#: 144  
[Go to Bill of Materials](#)

Type: ST1

Powered by 4submittal.com





## Compatible Products:

EnVision offers a variety of nodes, sensors, & gateways that are controlled via remote, ENVISIONLS Bluetooth Mesh & SILVAIR Bluetooth Mesh on all of our 0-10V dimmable fixtures.






### Individual Fixture Controls: PIR Sensor, Bi-Level Dimming, Daylight


Basic Note: -1 • ENVISIONLS Models Note: -BT • SILVAIR Models Note: -SL


	MODEL #	DESIGN	RECOMMENDED FIXTURE	FEATURES
	S-TWC-PIR-1 S-TWC-PIR-BT S-TWC-PIR-SL	Twist-C Control Sensor	Sensor Ready Fixtures: Area Lights, Canopies, Flood Lights, High Bays	All models are equipped with PIR occupancy sensing, high & low end bi-level dimming, & daylight sensing.
	S-TWC-90 + S-TWC-PIR-1 S-TWC-90 + S-TWC-PIR-BT S-TWC-90 + S-TWC-PIR-SL	Twist-C Control Sensor + 90 Degree Arm	Cylinders, Strips, Wall Packs	
	S-AUD-PIR-1 S-AUD-PIR-BT S-AUD-PIR-SL	2.5m Audio Jack	Panels & Troffers	
	S-SN-PIR-1 S-SN-PIR-BT S-SN-PIR-SL	Snap In Sensor	Troffers & Wraps	

### Group Controls ENVISIONLS Models Note : -BT • SILVAIR Models Note: -SL

	MODEL #	DESIGN	VOLTAGE	FEATURES	RECOMMENDED FEATURES
	S-CM-PIR-LV-BT S-CM-PIR-LV-SL	Ceiling Mounted PIR Sensor	12-24V	PIR Sensor, Bi-Level Dimming, Daylight, 360° detection, 12' Max Mounting Height	Connects to 0-10V dimmable fixtures
	S-WM-PIR-CUNV-BT S-WM-PIR-CUNV-SL	Wall Mounted PIR Occupancy Sensor, Bi-Level Dimming, Daylight	120-277V	On/Off PIR occupancy sensor, 180° detection, 30' detection @ 4' Mounting Height	Connects to LED fixtures
	S-WS-120V-USB-SL		120V	Dimming Wall Socket, Two Sockets	Floor Lamps, Other Lamps

### Gateway (Silvaire Only) 4.5–5.5 V DC, 2A Power over Ethernet 36–57 V DC

	MODEL #	DESIGN	VOLTAGE	FEATURES	RECOMMENDED FEATURES
	SGW-102	Wall or Ceiling Mounted	POE	Advanced Energy Monitoring Control	Connects to Silvaire Controls. Gateway is not required.

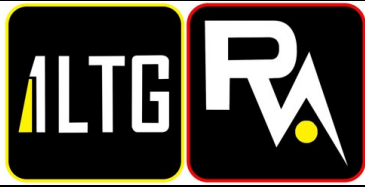

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-DH-HO

Line Item#: 145  
[Go to Bill of Materials](#)

Type: EM

Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Emergency Bug Eyes Square Models



Emergency



### Detail Specifications:

- Finish: White
- IP Rating: Dry Location
- Lumen Options
  - Standard: 3W 140LM
  - High Output: 6W 650LM
- Operating Temperature: -40° - 104° F
- Average life (L70) of 50,000 hours

### Applications:

- Exit Doors
- Corridor Intersections
- Exit Stairways
- Exit ramps

### Product Information:

- Built-in test switch and charge indicator light
- Overcharge and over-discharge protection
- Injection-molded thermoplastic housing, PC cover
- Backup Time: >90 minutes
- Recharge time: 24 hours

### Driver Options:

- Dual Voltage 120/277V
- PF >0.9, 50/60Hz
- Nickel Cadmium Battery 3.6V
- This fixture is non-dimmable

### Mounting & Installation:

- Wall and ceiling mounted
- Universal J-box mounting pattern

### Certifications:

- UL Listed for USA and CA (UL94V-0 Flame Rating)
- Meets UL924, NDPA 101
- Approved for CA T24
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

#### Series

**LED-EM-DH**

3W • 140Lm

**LED-EM-DH-HO**

6W • 650Lm

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 01.24





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-DH-HO

Line Item#: 145  
[Go to Bill of Materials](#)


Type: EM

Powered by 4submittal.com


**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Emergency Bug Eyes Square Models

### FEATURES

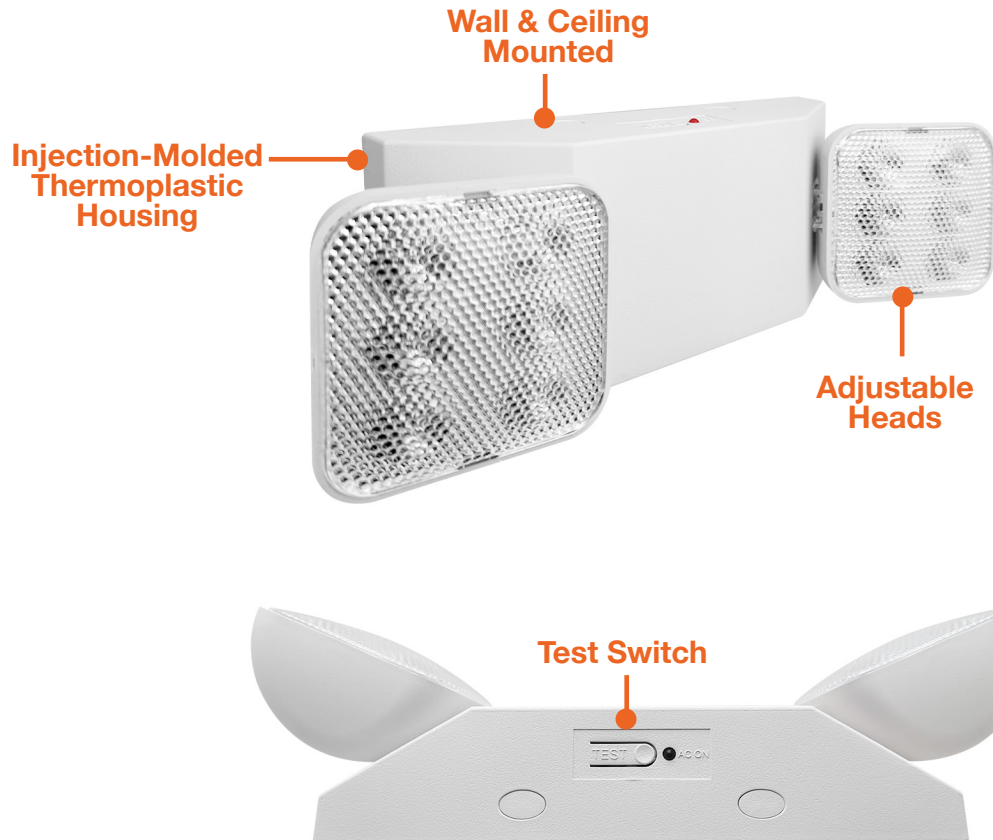

### DIMENSIONS

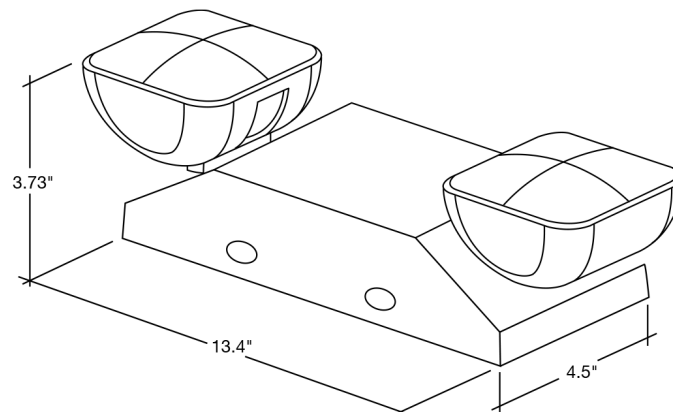

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-EXT-RG-WH-CMB-RC

Line Item#: 146  
[Go to Bill of Materials](#)

Type: EX/EM

Powered by 4submittal.com

**EnVisionLED**<sup>TM</sup>  
[WWW.ENVISIONLEDLIGHTING.COM](http://WWW.ENVISIONLEDLIGHTING.COM)

## Emergency Exit Sign With Bug Eyes



### Emergency Exit Signs



#### Detail Specifications:

- Finish: White Finish
- IP Rating: IP20, Dry Location
- Wattage: 3.5W
- Lumens: 140
- Operating Temperature: 32°F to 104°F
- Lens: Red or Green
- Remoted Capable
- Compatible with: LED-EM-RC-1, LED-EM-RC-2
- Average life (L70) of 50,000 hours

#### Applications:

- Exit Doors
- Corridor Intersections
- Exit Stairways
- Exit Ramps

#### Product Information:

- Built-in test switch and charge indicator
- Injection-molded thermoplastic housing, PC cover
- Backup Time: >90 minutes
- Recharge time: 24 hours
- Single Face
- 6" height letters with 3/4" stroke, viewable from 100ft away

#### Driver Options:

- Dual Voltage 120/277V
- PF >0.9, 50/60Hz

#### Mounting & Installations:

- Wall and ceiling mounted
- Universal J-box mounting pattern

#### Certifications:

- UL Listed for USA and CA (UL94V-0 Flame Rating)
- Meets UL924, NDPA 101
- Approved for CA T24
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

#### REMOTE HEAD OPTIONS

LED-EM-RC-1

LED-EM-RC-2

Series

**LED-EM-EXT-RG-WH-CMB-RC**


Red/Green Color Selectable

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 08.25

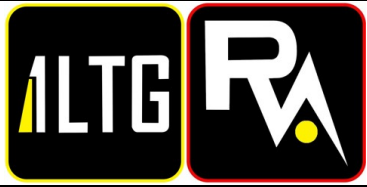

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-EXT-RG-WH-CMB-RC

Line Item#: 146  
[Go to Bill of Materials](#)

Type: EX/EM

Powered by 4submit.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## Emergency Exit Sign With Bug Eyes

### FEATURES

Film Protectant

Fire-Retardant




Adjustable Knuckle

Wall & Ceiling Mount

Super Bright COB LED


### DIMENSIONS

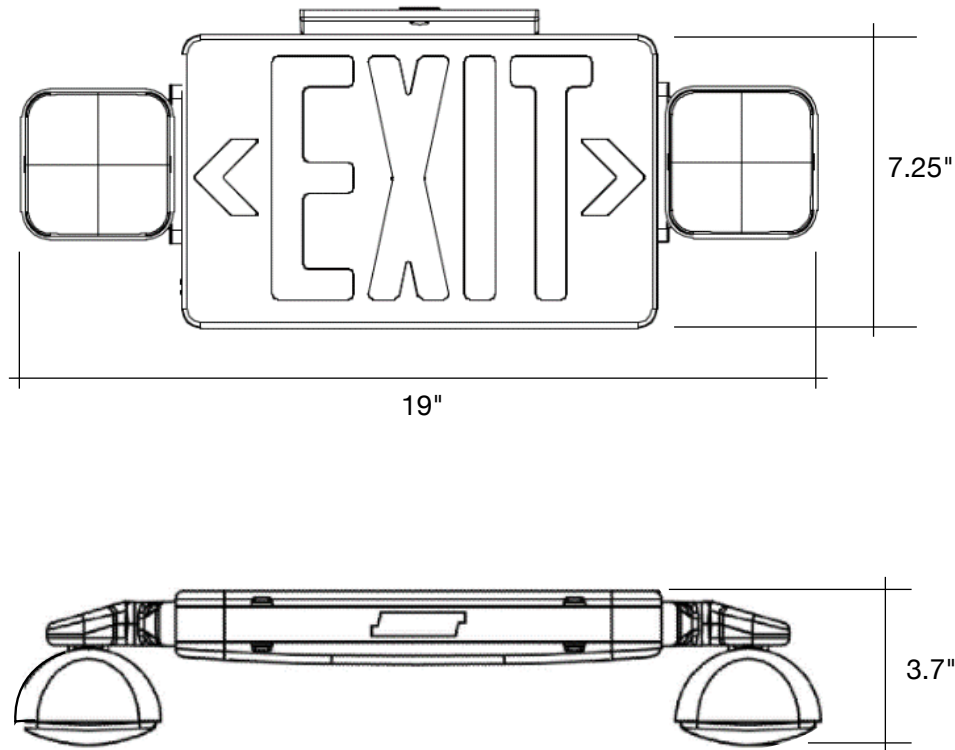

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

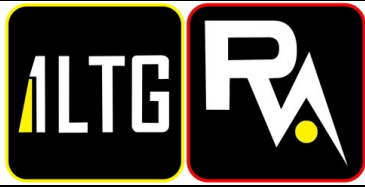

Date: 1/12/2026

Project:  
FINDLAY FLATSDescription:  
LED-CYE-UD-3-3P30-TRI-BL-PCLine Item#: 147  
[Go to Bill of Materials](#)

Type: WM1

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COMProject: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_

Area Lights



## M-Line: 3" Edge-Lit Cylinder Up/Down Light

### 3-CCT w/ Photocell



WATT	LUMENS
10	1,200
20	2,400
30	3,600

**Detail Specification:**

- Finish: Bronze, Black, White
- IP Rating: Wet Location IP65
- Beam Angle: 60°
- CCT: 30/40/50K Selectable
- Wattage: 30/20/10w
- Lumens: 3,600
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 122° F
- BUG: B2-U2-G2
- Lens: Clear glass with optics
- Average life (L70) of 50,000 hours

**Applications:**

- Dock and Loading
- Walkways & Pathways
- Parking Lots
- Hospitality, Multi-Family
- Outdoor Corridors
- General Outdoor Lighting
- Residential, Commercial and Industrial

**Product Information:**

- Sturdy die-cast aluminum housing finished with corrosion free powder coat
- Photocell included on each fixture. Easy disconnect.
- 1.5' STJW 18.3 AWG cable whip included
- Illuminates up and down and edge
- Select-n-Switch Technology: 3-CCT Selectable + 3-Power Selectable
- Instant-On to full brightness

**Driver Options:**

- UNV: 120-277V 0-10V Dimmable
- Built in 6Kv Surge Protector
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz

**Mounting & Installation:**

- Mounts to 3 or 4" J-box
- Covers a standard 4" recessed j-box

**Certifications:**


- UL Listed for USA and CA
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

**Series****LED-CYE-UD-3-3P30-TRI -**  
3" Up/Down Cylinder • 30/20/10W**Finish****BZ**  
Bronze  
**WH**  
White  
**BL**  
Black**Photocell****PC**  
Photocell  
is included.  
Easy quick  
disconnect.  
(PC-3/4-3PIN-LV)

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 10.23

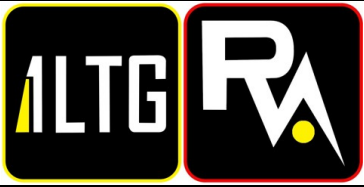

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-CYE-UD-3-3P30-TRI-BL-PC

Line Item#: 147  
[Go to Bill of Materials](#)

Type: WM1

Powered by 4submit.com


**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## M-Line: 3" Edge-Lit Cylinder Up/Down Light 3-CCT w/ Photocell

### FEATURES




### DIMENSIONS

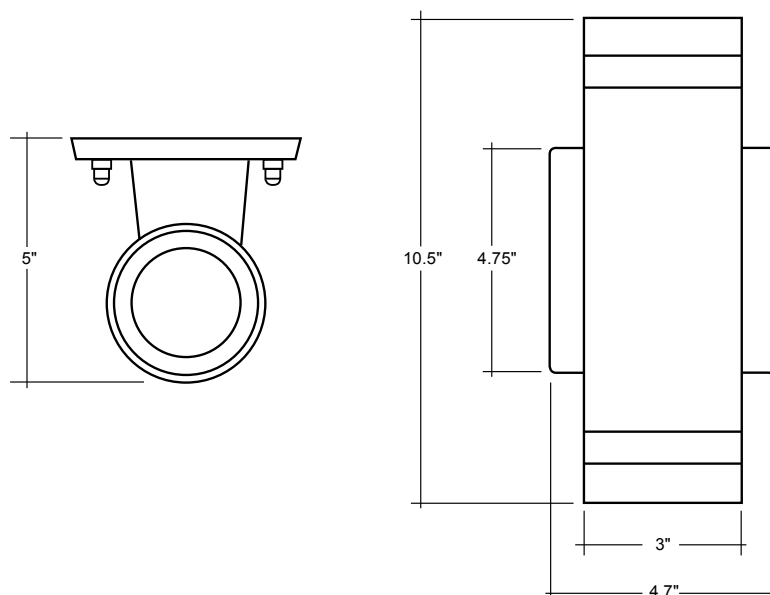

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

	Date: 1/12/2026	Description: SM160116BK	Line Item#: 148
	Project: FINDLAY FLATS		<a href="#">Go to Bill of Materials</a>
			Type: WM5
Powered by 4submittal.com			

Signlite | SM160116BK

Job Name:

Job Type:


Quantity:

Comments:



PRODUCT DESCRIPTION

This classic design was originally used to illuminate signs but now is used as a nostalgic wall washer in residential and commercial applications. The polycarbonate shade is supported by an aluminum arm for maximum durability at a very affordable price.



\*height from center of outlet to the top of the fixture

MEASUREMENTS

DIMENSION	: 7.5" W x 13.75" H x 20.5" Ext
BACK PLATE	: 5" W x 5" H x 2.5" HCO
HANGING WEIGHT	: 1.17 lb
<b>LAMPING</b>	
INPUT VOLTAGE	: 120V
BULB	: 60W Incandescent E26 Medium , 60W Total
BULB INCLUDED	: (Not Included)
DIMMABLE	: Yes
LIGHTING_DIRECTION	: Down

FINISHES OPTION

Black (BK)

MATERIAL

Polycarbonate, Aluminum

RATINGS

cETLus  
Wet Location



ADDITIONAL


INSTALL UP/DOWN: Down  
OPERATING TEMPERATURE:  
-20°C (-4°F), 40°C (104°F)

Always consult a qualified electrician before installing any lighting product.

STUDIO•M

**Modifications or Customizations:** Please email [contract@studiomlighting.com](mailto:contract@studiomlighting.com)  
**Sample Request:** Please email [order@studiomlighting.com](mailto:order@studiomlighting.com) with subject line "Sample Order\_ [Project Name] / [Specifier/Designer]"  
 All samples are subject to Studio M approval and must show proof of project and/or explanation.

Job Name:	Job Type:
Quantity:	Comments:

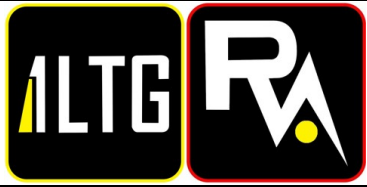

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-FLM-A19-8.5W-30K-D-JA8

Line Item#: 149  
[Go to Bill of Materials](#)


Type: WM5 LAMP

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## A-19 Bulb Filament Series

LED Bulbs

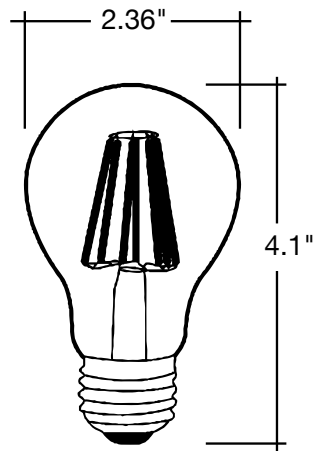

### Detail Specifications

- IP Rating: Damp Location
- Beam Angle: Omni-Directional 360°
- Chip: Filament, R9- 78, CRI >90
- Operating Temperature: -4° - 114° F
- Average life (L70) of 25,000 hours

### Applications:

- Decorative Lighting
- Interior Lighting
- Table & Floor Lamps
- Showcases
- Residential, Multi-Family, Commercial

### Product Information:

- Suitable for use in existing fixtures
- Instant-On to full brightness

### Driver Options:

- 120V
- Triac Dimmable
- PF >0.9, 50/60Hz

### Mounting & Installation:

- E26 Socket
- Direct A Lamp Replacement

### Certifications:

- UL Listed for USA and CA
- Energy Star
- Title 20 and JA8-2022 Approved (8.5W Model Only)
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

### Dimmer List:

Leviton	6674
Lutron	LGCL-153P
Lutron	DVCL-153P
Lutron	CTCL-153P
Lutron	MAELV-300

### Series

**LED-FLM-A19-8.5W-30K-D-JA8**

550 Lumens 60W Equivalent

**LED-FLM-A19-10W-27K**

1,000 Lumens 100W Equivalent

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 10.23





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-RC-1

Line Item#: 150  
[Go to Bill of Materials](#)

Type: RH1

Powered by 4submittal.com



Project: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_



## Single/Double Remote Head

### Product Information:

- Injection-Molded Thermoplastic ABS Housing
- 320 Lumens
- UL-940V-0 Flame Rating
- Wall and Ceiling Mounting
- Input Voltage: 3.6-24 VDC
- Super Bright SMD LED 2.4W
- IP Class: IP65
- Insulation: Class II
- Operating Temperature: 0°F ~ 104° F
- Remote Capable
- Compatible with but Not Limited to  
LED-EM-EXT-G-WH-CMB-RC  
or LED-EM-EXT-R-WH-CMB-R
- 5 Year Limited Warranty



#### 1 Product

LED-EM-RC Remote Head


#### 2 Head

Single 1  
Double 2


*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)





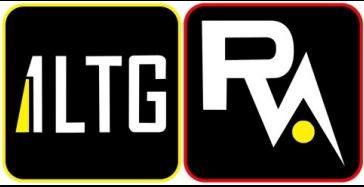

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-EM-RC-1

Line Item#: 150  
[Go to Bill of Materials](#)

Type: RH1

Powered by 4submittal.com




## Single/Double Remote Head

### FEATURES



### FEATURES

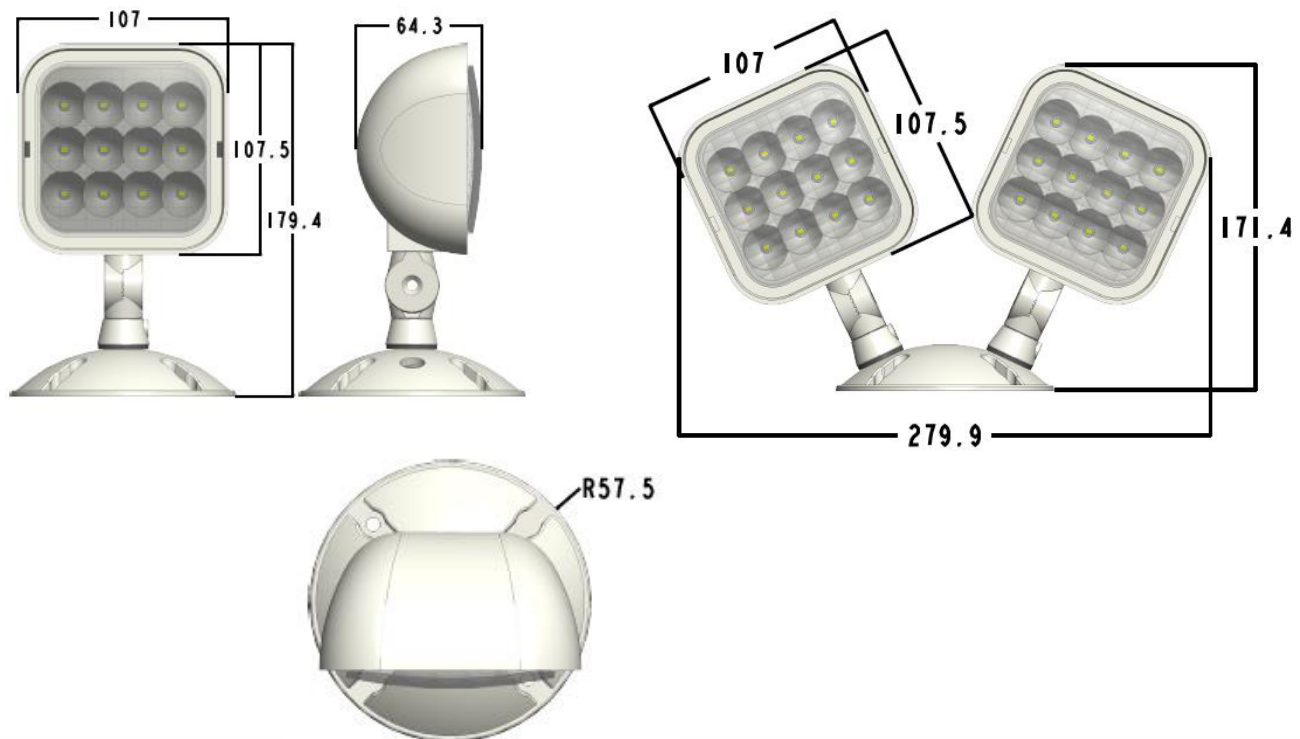

*Specs and model numbers are subject to change with or without notice.*

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)





Date: 1/12/2026

Project:  
FINDLAY FLATSDescription:  
LED-BPL-2X2-3M40-5CCTLine Item#: 151  
[Go to Bill of Materials](#)

Type: SM8

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## LED Panels: BackLit Line

### 5-CCT & 3-Power Selectable

LED Panels

**Detail Specifications:**

- Finish: White, Custom finishes available
- IP Rating: Damp Location (IP44)
- 5CCT: 30/35/40/50/65K
- Beam Angle: 110°
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 114° F
- Lens: PS (polystyrene) frosted, non-yellowing, & shatter resistant
- Average life (L70) of 50,000 hours
- IC Rated

**Applications:**

- General Indoor Lighting
- Utility & Storage
- Garage Structures
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality
- Commercial and Industrial

**Product Information:**

- Metal housing finished with corrosion free power coat
- Even light distribution
- Lightweight for easier installation
- Select-n-Switch Technology: 5-CCT + 3-Power Selectable
- Control Options:
  - Standard Sensors
  - SILVAIR Bluetooth Mesh
  - ENVISIONLS Bluetooth
  - [Click Here](#) for More Information

**Driver Options:**

- UNV: 120-277V 0-10V Dimmable (Dim to Off)
- Optional 347-480V step down transformer available
- Standard EMB used:
  - 40W: 8W EMB ([LED-EMB-8W-HV-0-10V-2P](#))
  - 50W: 15W EMB ([LED-EMB-15W-HV-0-10V-2P](#))
- Higher wattage emb (up to 25W) available by request. Pricing will vary.
- THD: <15% (+/-5% tolerance), PF >0.9, 50/60Hz
- Isolated Driver
- Flicker Free

**Mounting & Installations:**

- Lay-in ceilings for 5/8" and 3/8" ceiling widths
- Built-in earthquake clips
- Optional 9' suspension kit available
- Optional surface mount, drywall kit available
- Use surface mount and suspension kit for an aesthetically pleasing design

**Certifications:**

- ETL Listed for USA and CA
- DLC Listed/ DLC Premium Listed (HL Versions)
  - View DLC ID Chart below
- NSF Rated
- Approved for CA T24
- 5 Year Limited Warranty

Black Trims  
Available  
2X4/2X2/1X4Shown with  
Sensor Option

Regular Versions		HL Versions	
WATT	LUMENS	WATT	LUMENS
20	2,200	30	3,750
30	3,300	40	5,000
40	4,400	45	5,625
50	5,500	50	6,250
		55	6,875
		65	8,125

Series	Sensor	Emergency	Driver <sup>1</sup>	Whip
LED-BPL-2X2-3M40-5CCT	(blank)	(blank)	(blank)	(blank)
20/30/40W	No Sensor	No	120-277V	No Whip
LED-BPL-2X2-3M50-5CCT-HL	SR	Emergency	HV	-6FLX
30/40/50W	Sensor Ready	Emergency	347-480V	6' Flex
LED-BPL-2X4-3M50-5CCT	(See sensor options)	Backup	Stepdown	
30/40/50W				
LED-BPL-2X4-3M65-5CCT-HL				
45/55/65W				
LED-BPL-1X4-3M40-5CCT				
20/30/40W				

1. HV: High voltage  
is made to order.**Optional Accessories (Order Separately)**


Sensors	Suspension Kits	Surface <sup>1</sup> Mount Kits	Drywall Kits	Color Trims
S-AUD-PIR-1	SK-10FT-Y-LC-CB	2X2-SM-3"	LED-PNL-2X2-FLNG	BPL-2X2-TRIM-BL
PIR Bi-Level	10' Suspension Kit	3" Height	LED-PNL-2X4-FLNG	2x2 Black Trim
Motion + Daylight	SK-20FT-Y-LC-CB	2X4-SM-3"	LED-PNL-1X4-FLNG	BPL-2X4-TRIM-BL
Sensor Remote	20' Suspension Kit	3" Height		2x4 Black Trim
Required:	CK-6FT-V	1X4-SM-3"		BPL-1X4-TRIM-BL
(S-LINE-R)				1x4 Black Trim
S-AUD-PIR-BT	6' Chain Hanging Kit	3" Height		
PIR ENVISIONLS				
Bluetooth Control				
S-AUD-PIR-SL				
PIR SILVAIR				
Bluetooth Mesh				

1. Custom height options  
available. Contact us.

Specs and model numbers are subject to change with or without notice. Customization of product is available.

**EnVision LED Lighting, Inc.**6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 12.24

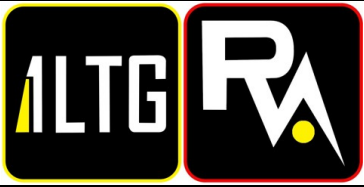

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-BPL-2X2-3M40-5CCT

Line Item#: 151  
[Go to Bill of Materials](#)

Type: SM8


Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM


## LED Panels: BackLit Line


### 5-CCT & 3-Power Selectable

#### FEATURES

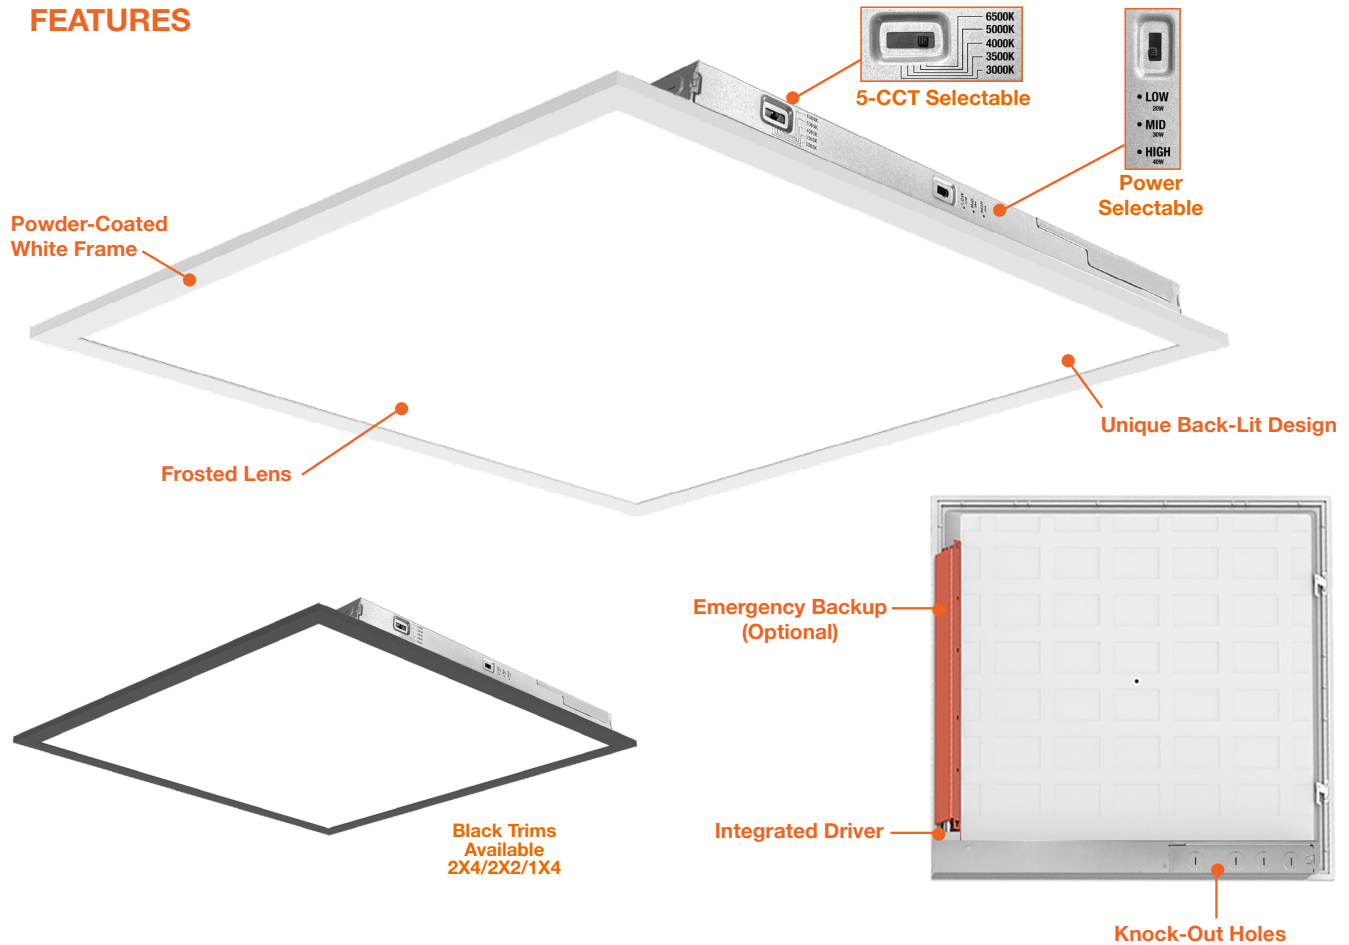

#### DIMENSIONS

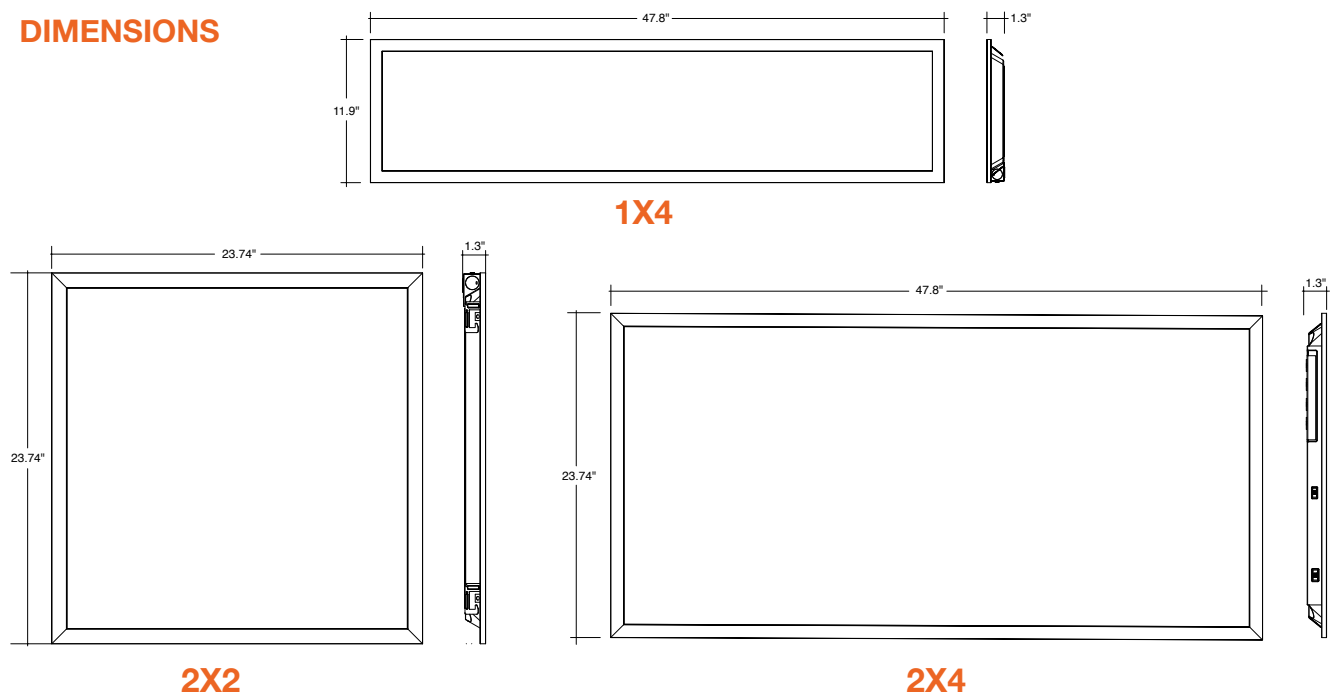

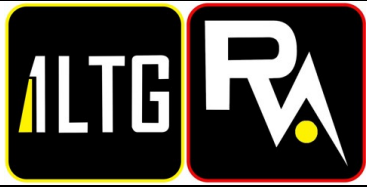

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-BPL-2X2-3M40-5CCT

Line Item#: 151  
[Go to Bill of Materials](#)

Type: SM8

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## LED Panels: BackLit Line 5-CCT & 3-Power Selectable

### ACCESSORIES




SK-10FT-Y-LC-CB  
SK-20FT-Y-LC-CB



CK-6FT-V




S-AUD-PIR-1  
S-AUD-PIR-BT  
S-AUD-PIR-SL

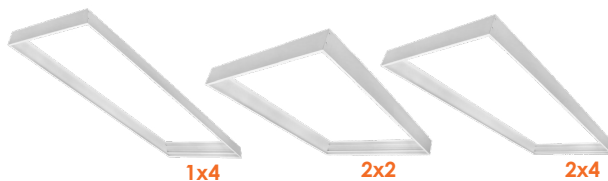

1x4

2x2

2x4

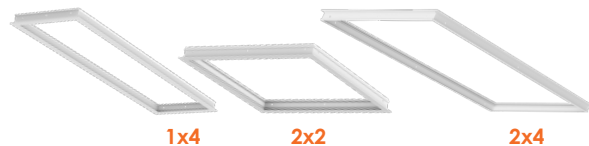

1x4

2x2

2x4



2x2



1x4



2x4

Model	Voltage	Watts	Lumens	Color	CRI
LED-BPL-2X2-3M40-5CCT	120/277V	20/30/40w	2600/3900/4400	30/35/40/50/65k	>80
LED-BPL-2X2-3M50-5CCT-HL	120/277V	30/40/50w	3900/4400/5500	30/35/40/50/65k	>80
LED-BPL-2X4-3M50-5CCT	120/277V	30/40/50w	3900/4400/5500	30/35/40/50/65k	>80
LED-BPL-2X4-3M65-5CCT-HL	120/277V	45/55/65w	5625/6875/8125	30/35/40/50/65k	>80
LED-BPL-1X4-3M40-5CCT	120/277V	20/30/40w	2600/3900/4400	30/35/40/50/65k	>80

### SUSPENSION KITS

Accessory	Description
SK-10FT-Y-LC-CB	10' Suspension Kit
SK-20FT-Y-LC-CB	20' Suspension Kit
CK-6FT-V	6' Chain Hanging Kit
LED-PNL-2X4-SK	3.5' Suspension Kit, works for all sizes

### SENSORS

Accessory Model	Description
S-AUD-PIR-1	PIR Bi-Level Motion + Daylight Sensor Remote Required: (S-LINE-R)
S-AUD-PIR-BT	PIR ENVISIONLS Bluetooth Control
S-AUD-PIR-SL	PIR SILVAIR Bluetooth Mesh

### SURFACE MOUNT KITS

Accessory	Description
2X2-SM-3"	2X2 Surface Mount Kit 3" Height for all Panels and Troffers
2X4-SM-3"	2X4 Surface Mount Kit 3" Height for all Panels and Troffers
1X4-SM-3"	1X4 Surface Mount Kit 3" Height for all Panels and Troffers

### DRYWALL KITS

Accessory	Description
LED-PNL-2X2-FLNG	Flange (Drywall) Kit for Panels for all 2X2 Fixtures
LED-PNL-2X4-FLNG	Flange (Drywall) Kit for Panels for all 2X4 Fixtures
LED-PNL-1X4-FLNG	Flange (Drywall) Kit for Panels for all 1X4 Fixtures

### TRIMS


Accessory	Description
BPL-2X2-TRIM-BL	2x2 LED Panel: Backlit-Line Black Trim
BPL-1X4-TRIM-BL	1x4 LED Panel: Backlit-Line Black Trim
BPL-2X4-TRIM-BL	2x4 LED Panel: Backlit-Line Black Trim

Luminaires for Ambient Lighting of - DLC Product ID:

LED-BPL-2x2-3M40-5CCT	S-IMBE52 (Standard)
LED-BPL-2x4-3M50-5CC	S-U0267J (Standard)
LED-BPL-1x4-3M40-5CCT	S-DR8V2E (Standard)
LED-BPL-2x2-3M50-5CCT-HL	S-V26054 (Standard)
LED-BPL-2x4-3M65-5CCT-HL	S-WNV8KG (Premium)

EnVision LED Lighting, Inc.

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

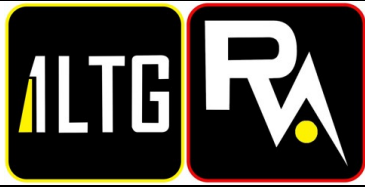

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-BPL-2X2-3M40-5CCT









Line Item#: 151  
[Go to Bill of Materials](#)

Type: SM8

Powered by 4submittal.com


## EnVisionLED™ Control Options

EnVision LED offers 3 control systems compatible with our LED Fixtures for projects of all sizes and budgets.

	Basic Controls	EnVisionLS 	EnVisionLED™ x SILVAIR 
<b>Description</b>	Standard Plug In Sensors	Basic Bluetooth Wireless Control	Advanced Bluetooth Wireless Control
<b>Recommended Quantity</b> (but not limited to)	N/A	>40-50 Nodes	>50 Nodes
<b>Maximum Zone Quantity</b>	N/A	100	3,000
<b>Commissioning Tool</b>	Remote Only	  ENVISIONLS App 	  SILVAIR App 
<b>Commissioning Process</b>	Individually Set via Remote	Wireless Must be done on site	Wireless- Initial linking must be done on site. Commissioning can be done via desktop remotely.
<b>Floor Plan Upload</b>	N/A	N/A	Yes Add a floor plan and mark luminaires & zones via desktop
<b>Gateway</b>	N/A	N/A	Required only for energy monitoring, advanced scheduling, automated demand response.
<b>Individual Luminaire Control</b>	Yes	Yes	Yes
<b>Luminaire Grouping Zoning</b>	N/A	Yes	Yes
<b>High End Power Low End Power</b>	Yes but limited (View Remote)	Yes	Yes
<b>Cost</b>	\$	\$\$	\$\$\$
<b>DLC NLC Listed</b>	N/A	Yes	Yes
<b>Energy Monitoring &amp; Data Reporting</b>	N/A	N/A	Monitor energy usage per individual zone & retrofit cost savings calculation + detailed reporting





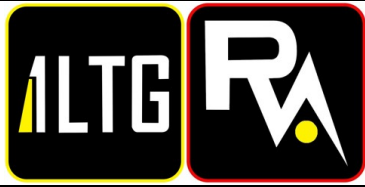

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-BPL-2X2-3M40-5CCT

Line Item#: 151  
[Go to Bill of Materials](#)

Type: SM8

Powered by 4submittal.com





## Compatible Products:

EnVision offers a variety of nodes, sensors, & gateways that are controlled via remote, ENVISIONLS Bluetooth Mesh & SILVAIR Bluetooth Mesh on all of our 0-10V dimmable fixtures.






### Individual Fixture Controls: PIR Sensor, Bi-Level Dimming, Daylight


Basic Note: -1 • ENVISIONLS Models Note: -BT • SILVAIR Models Note: -SL


	MODEL #	DESIGN	RECOMMENDED FIXTURE	FEATURES
	S-TWC-PIR-1 S-TWC-PIR-BT S-TWC-PIR-SL	Twist-C Control Sensor	Sensor Ready Fixtures: Area Lights, Canopies, Flood Lights, High Bays	All models are equipped with PIR occupancy sensing, high & low end bi-level dimming, & daylight sensing.
	S-TWC-90 + S-TWC-PIR-1 S-TWC-90 + S-TWC-PIR-BT S-TWC-90 + S-TWC-PIR-SL	Twist-C Control Sensor + 90 Degree Arm	Cylinders, Strips, Wall Packs	
	S-AUD-PIR-1 S-AUD-PIR-BT S-AUD-PIR-SL	2.5m Audio Jack	Panels & Troffers	
	S-SN-PIR-1 S-SN-PIR-BT S-SN-PIR-SL	Snap In Sensor	Troffers & Wraps	

### Group Controls ENVISIONLS Models Note : -BT • SILVAIR Models Note: -SL

	MODEL #	DESIGN	VOLTAGE	FEATURES	RECOMMENDED FEATURES
	S-CM-PIR-LV-BT S-CM-PIR-LV-SL	Ceiling Mounted PIR Sensor	12-24V	PIR Sensor, Bi-Level Dimming, Daylight, 360° detection, 12' Max Mounting Height	Connects to 0-10V dimmable fixtures
	S-WM-PIR-CUNV-BT S-WM-PIR-CUNV-SL	Wall Mounted PIR Occupancy Sensor, Bi-Level Dimming, Daylight	120-277V	On/Off PIR occupancy sensor, 180° detection, 30' detection @ 4' Mounting Height	Connects to LED fixtures
	S-WS-120V-USB-SL		120V	Dimming Wall Socket, Two Sockets	Floor Lamps, Other Lamps

### Gateway (Silvaire Only) 4.5–5.5 V DC, 2A Power over Ethernet 36–57 V DC

	MODEL #	DESIGN	VOLTAGE	FEATURES	RECOMMENDED FEATURES
	SGW-102	Wall or Ceiling Mounted	POE	Advanced Energy Monitoring Control	Connects to Silvaire Controls. Gateway is not required.

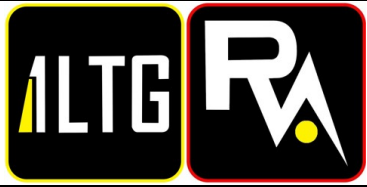

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 152  
[Go to Bill of Materials](#)

Type: SM3

Powered by 4submittal.com




LIGHTING | REINVENTED

plano **ARCH** PRO

## LDLL | Eclipse-II

Product Data Sheet

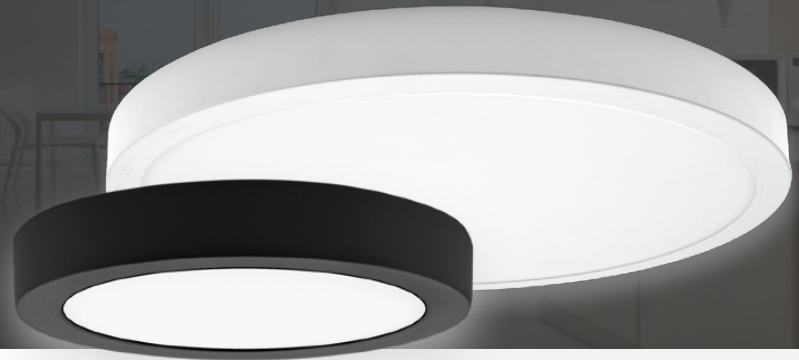

COMMERCIAL-GRADE

### LED Surface Mount Puck Downlight



CCTselect



TruColor Rendering

5" / 7" / 9" / 11" / 13"

#### Product Overview

**INTENDED USE** — The Eclipse-II Series is built for 5-way switchable CCT and is suitable for use in dry, damp, and wet locations, perfect for use in kitchens, hallways, stairways, bathrooms, closets, and just about anywhere you'd need it.

**CONSTRUCTION** — The die-cast aluminum housing is designed for durability and ruggedness.

**INSTALLATION** — Quick-mount aluminum backplate for easy installation.

**WARRANTY** — Featuring a no-compromise 5-year warranty, Energy Star and JA8-compliant, the Eclipse-II is a clean and modern solution for surface mounted driverless design.

ARCHIPELAGO luminaires and LED components undergo rigorous testing by an independent laboratory to meet IESNA LM-79 and LM-80 standards for light output and lumen maintenance. LED color temperature is warranted to shift no more than 180K over the standard warranty period. Correlated Color Temperature (CCT) follows the guidelines set forth in the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

#### Applications



Residential



Hallway



Patio



Entryway

#### Main Features

- Low-Profile Edge-Lit Surface Mount Design
- Durable Di-Cast Aluminum Trim w/ Frosted Lens
- For New Construction or Retrofit Applications
- Suitable for Use in Dry, Damp and Wet Locations
- Suitable for Use in Closets, In Accordance to NEC Guidelines
- Installs on Ceiling and Standard Junction Boxes
- Dimmable to 10% on Compatible TRIAC Dimmers
- 5-Year, 50,000 Hr Warranty
- CEC T24 JA8 Compliant
- NEC Compliant, Suitable for Use in Closet
- Energy Star Certified for 5", 7", 9"

#### Product Warranty\*

5-Year Warranty



50,000 Hrs



\* Standard warranty. Extended warranty available.

Archipelago Lighting, Inc.

| **Headquarter:** 4615 State Street, Montclair, CA 91763


| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

[Contact Us](#)





LDLL | Eclipse-II



Project Details





Project Name:

Fixture Schedule:

Project Number:

Notes:

Highlights

Features	Description
5-CCTselect	 CCT selectable: 5-way dip-switch
Sensor Ready	 Optional plug-n-play motion sensor available on 7" and 9"
TruColor High CRI	 Title 24 Compliant. JA8 LED 90CRI+
Limited Warranty	 5-Year Warranty

Key Specifications

- Input Voltage: 120V
- Dimming: TRIAC
- Efficacy: ≤103lm/W
- IP: Suitable for Wet Location
- Housing: Die-Cast Aluminum
- Power Factor (PF): >0.9 Non-Flicker
- Operating Temperature: -4°F - 113°F
- Total Harmonic Distortion (THD): <20%
- Beam Angle (°): 120°

Certifications



Model Specifications

Model	Size (in)	Wattage (W)	Lumen (lm)	Efficacy (lm/W)	5-CCTselect (K) <sup>1</sup>	Voltage (V)	CRI
LDLL0510	5"	10W	671lm 675lm 698lm 712lm 689lm	67lm/W 68lm/W 70lm/W 71lm/W 69lm/W	2700K 3000K 3500K 4000K 5000K	120V	90CRI+
LDLL0715	7"	15W	1,187lm 1,205lm 1,211lm 1,257lm 1,241lm	79lm/W 80lm/W 81lm/W 84lm/W 83lm/W	2700K 3000K 3500K 4000K 5000K		
LDLL0918	9"	18W	1,409lm 1,415lm 1,436lm 1,460lm 1,442lm	78lm/W 79lm/W 80lm/W 81lm/W 80lm/W	2700K 3000K 3500K 4000K 5000K		
LDLL1121	11"	21W	2,022lm 2,035lm 2,054lm 2,165lm 2,159lm	96lm/W 97lm/W 98lm/W 103lm/W 103lm/W	2700K 3000K 3500K 4000K 5000K		
LDLL1324	13"	24W	2,393lm 2,407lm 2,450lm 2,455lm 2,446lm	100lm/W 100lm/W 102lm/W 102lm/W 102lm/W	2700K 3000K 3500K 4000K 5000K		

1. Default settings on CCTselect is highest CCT available.

Archipelago Lighting, Inc.

| **Headquarter:** 4615 State Street, Montclair, CA 91763  
| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)  
+1 (866) 912-3220



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 152  
[Go to Bill of Materials](#)

Type: SM3

Powered by 4submittal.com



LDLL | Eclipse-II

**Low-Glare Lens**  
Smooth diffused light output.

**Driverless**  
Minimizes installation height.

**IP54**  
Suitable for damp locations.

**Solid Backplate**  
Passive heat dissipation.

**Edge-Lit Technology**  
Even and uniform light distribution.

**PMMA Lens**  
Durable, no-yellowing lens.



#### Ordering Guide<sup>1</sup>

Model Series	Size (in) / Wattage (W)	Series	CCTselect (K)	Finish Color
<b>LDLL</b> LED Surface Mount Puck Downlight	<b>0510</b> 5inch / 10W <b>0715</b> 7inch / 15W <b>0918</b> 9inch / 18W <b>1121</b> 11inch / 21W <b>1324</b> 13inch / 24W	- <b>E2</b> Eclipse-II	<b>S5</b> 5-CCTselect: 2700K 3000K 3500K 4000K 5000K	/ <b>B</b> Black <b>W</b> White
<b>CATALOG #:</b>				
<b>LDLL</b>		- <b>E2</b>	<b>S5</b>	/

#### Options Guide<sup>2</sup>

EM Driver <sup>3</sup>	Motion Sensor
<input type="checkbox"/> <b>EM15</b> 15W EM Driver <input type="checkbox"/> <b>CRCU</b> 15W EM Driver with Junction Box	<input type="checkbox"/> <b>MSP/W</b> PIR Bi-Level Sensor for 7" and 9" ONLY (White Finish)
<b>OPTIONAL ACCESSORIES #:</b>	

NOTE:

- Only one selection may be applicable within the same category.
- Multiple selections may be applicable within the same option category. See Compatible Accessories below for details.
- EM drivers only work with 7, 9, 11 and 13in fixtures

Archipelago Lighting, Inc.


| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)






+1 (866) 912-3220

	Date: 1/12/2026	Description: LDLL0510-E2S5/W	Line Item#: 152
	Project: FINDLAY FLATS		<a href="#">Go to Bill of Materials</a>
			Type: SM3
Powered by 4submittal.com			



LDLL | Eclipse-II

Sizing & Measurements


Model Series	Dimensions	Overall Diameter (in)	Depth (IN)
LDLL0510-E2		5.51	0.79
LDLL0715-E2		7.48	0.82
LDLL0918-E2		8.86	0.79
LDLL1121-E2		10.98	0.98
LDLL1124-E2		12.80	0.98

Recommended Dimmers

Make	Models			
Lutron	TG-600PR-WH S-600PR-WH CTCL-153PDH-WH	TGCL-153PH-LA SLV-600P-AL DV-600PR-WH	SCL-153PH-WH GT-600P DVCL-153P	MSCL-OP153M MACL-153M//MA-R PD-6WCL
Leviton	6672 IPL06	6674	DSL06	RNL06

Accessories (Standard)

Accessories (Optional)



<b>Mounting Bracket</b>	<b>Wire Nuts</b>	<b>Bolts</b>	<b>15W EM Driver</b>	<b>PIR Bi-Level Sensor</b>
Compatible to 2.75" or 3.50" Junction Box			EM15-HMB/170DC CRCU-EM/JBM	LDLL-E2/MSP/W

Archipelago Lighting, Inc.

| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 152  
[Go to Bill of Materials](#)


Type: SM3


Powered by 4submittal.com



LDLL | Eclipse-II

EM Driver / J-Box (Optional)

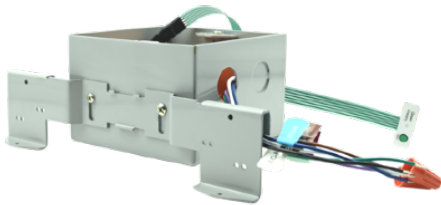

Technical Specification	CRCU-EM/JBM
Emergency Power	15W Max
Installation Method	Recessed
IP Rating	IP20
CEC T.24/JA8 Compliant	Yes
Color Finish	Grey
Physical Features	<ul style="list-style-type: none"><li>Directly connect to AC input</li><li>Fits 2.75" and 3.5" J-Box</li><li>Supports recessed in-ceiling mount</li></ul>
Self-Diagnostic Test Switch	<ol style="list-style-type: none"><li>Emergency conversion kit will go into emergency mode when test switch is pressed while main power is ON.</li><li>Will go into charging mode if test switch is not pressed.</li><li>In emergency mode, pressing the test switch for 3-seconds will inactivate emergency mode.</li></ol>
Indicator Status Light	<ol style="list-style-type: none"><li>Green ON: Charging mode / charging full</li><li>Green OFF: Mains power OFF / discharging mode</li></ol>
Dimension	<p>W4.29in x H2.96</p> 

Archipelago Lighting, Inc.


| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220

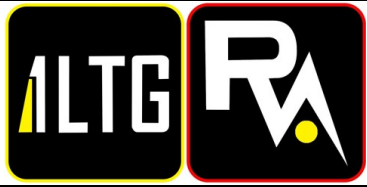

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-VT-ADJ-24-21W-5CCT-BN

Line Item#: 153  
[Go to Bill of Materials](#)

Type: V1

Powered by 4submittal.com

**EnVisionLED**<sup>TM</sup>  
WWW.ENVISIONLEDLIGHTING.COM

## Vanity Fixtures

### Square Adjustable Swivel



FRONT VIEW



90° Rotatable Angle

Vanity Fixture



#### Detail Specifications:

- Power: 21W
- Lumens: 2,700
- Finishes: Black, Brushed Nickel, Chrome
- IP Rating: IP54 Damp Location
- Beam Angle: 100°
- Chip: SMD 2835, R9 >50, CRI >90
- Operating Temperature: -40° - 114° F
- Lens: Frosted Acrylic, non-yellowing
- Average life (L70) of 50,000 hours

#### Applications:

- Bathrooms & Lavatories
- Hallways & Corridors
- Artwork, Museums
- Residential & Multifamily
- Education, Healthcare, Retail, Hospitality

#### Product Information:

- Available in 23.6" length
- Adjustable Angle: Lens swivels up and down
- Wide j-box for easier installation in retrofit and new construction applications
- Select-n-Switch Technology: 5-CCT Selectable

#### Driver Options:

- Triac & ELV dimmable down to 5%
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz
- Built in 2.5Kv Surge Protector
- Flicker Free

#### Mounting & Installations:

- 30/40 Junction Box
- Surface mount bracket included

#### Certifications:

- ETL Listed for USA and CA
- CA Title 24 JA8-2022 CEC Listed
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

#### Series

LED-VT-ADJ-24-21W-5CCT-BL

Black

LED-VT-ADJ-24-21W-5CCT-BN

Brushed Nickel

LED-VT-ADJ-24-21W-5CCT-CH


Chrome

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 04.25

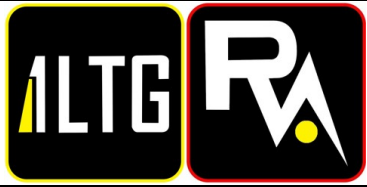

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-VT-ADJ-24-21W-5CCT-BN

Line Item#: 153  
[Go to Bill of Materials](#)

Type: V1

Powered by 4submit.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Vanity Fixtures

### Square Adjustable Swivel

#### FEATURES




90° Rotatable Angle



Beam Angle 100°


Frosted Acrylic  
Non-Yellowing  
Lens

Aluminum  
Body



5-CCT Selectable

#### MEASUREMENTS

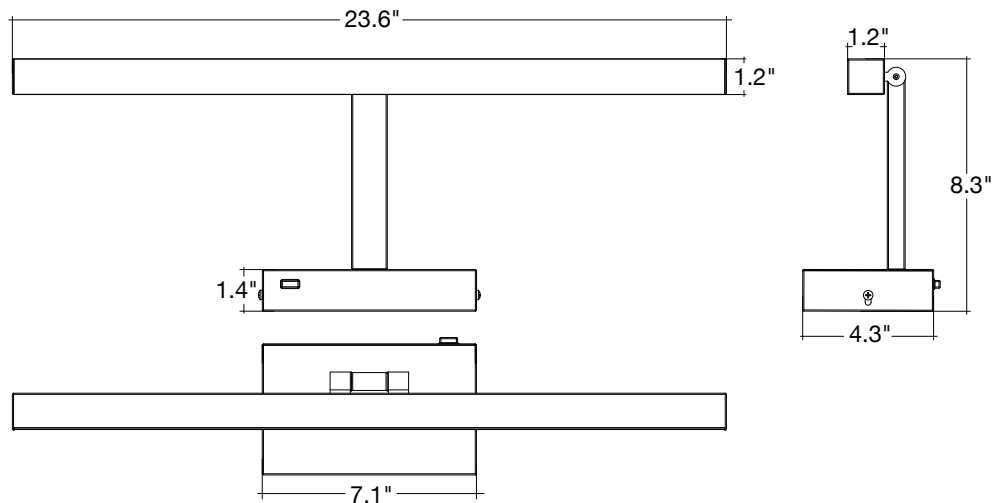

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
TS3-8FT-SM-WH

Line Item#: 154  
[Go to Bill of Materials](#)


Type: TL1

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## Linear Track & Accessories

### 3-Wire Single Circuit



	LENGTH	WIDTH	HEIGHT
TS3-2FT-SM 2' Nominal	24"	1 3/8"	1 1/16"
TS3-4FT-SM 4' Nominal	48"	1 3/8"	1 1/16"
TS3-8FT-SM 8' Nominal	96"	1 3/8"	1 1/16"



#### Item

TS3-2FT-SM-WH  
White  
TS3-2FT-SM-BL  
Black  
TS3-4FT-SM-WH  
White  
TS3-4FT-SM-BL  
Black  
TS3-8FT-SM-WH  
White  
TS3-8FT-SM-BL  
Black

#### Accessories

TS3-SM-LIVE-WH  
Live End: Required to start a run  
TS3-SM-LIVE-BL  
Live End: Required to start a run  
TS3-SM-END-WH  
End Cap: Required to end a run  
TS3-SM-END-BL  
End Cap: Required to end a run  
TS3-SM-MJ-WH  
Mini Joiner: Low profile joiner  
for two straight track sections  
TS3-SM-MJ-BL  
Mini Joiner: Low profile joiner  
for two straight track sections  
TS3-SM-SC-WH  
Straight Connector: Connect two track  
sections end to end with a center  
feed option  
TS3-SM-SC-BL  
Straight Connector: Connect two track  
sections end to end with a center  
feed option  
TS3-SM-L-WH  
L-Connector: Connect two track  
sections at a right angle  
TS3-SM-L-BL  
L-Connector: Connect two track  
sections at a right angle

TS3-SM-T-WH  
T-Connector: Connect two track  
sections at a T angle  
TS3-SM-T-BL  
T-Connector: Connect two track  
sections at a T angle  
TS3-SM-X-WH  
X-Connector: Connect two track  
sections at an cross angle  
TS3-SM-X-BL  
X-Connector: Connect two track  
sections at an cross angle  
TS3-SM-FLX-WH  
Flexible Connector: Connect two track  
sections at any angle up to 90°  
TS3-SM-FLX-BL  
Flexible Connector: Connect two track  
sections at any angle up to 90°  
TS3-SM-FC-WH  
Floating Canopy: Track can be  
connected to existing outlet box  
along the track.  
TS3-SM-FC-BL  
Floating Canopy: Track can be  
connected to existing outlet box

Project: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_

Track Lights



#### Detail Specifications:

- Finish: White, Black
- Dry Location Rated
- 3-Wire
- Single Circuit
- Voltage: 120V

#### Applications:

- General Track Lighting
- Residential & Multifamily
- Art Galleries, Museums
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality

#### Product Information:

- End cap included with each track
- Extruded aluminum housing
- Solid copper conductor
- Interchangeable beam angles
- Multiple accessories available

#### Mounting & Installations:

- Compatible with H-Type single circuit track system
- Surface Mount Use

#### Certifications:

- ETL Listed for USA and CA

Specs and model numbers are subject to change with or without notice. Customization of product is available.

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 10.23





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
TS3-8FT-SM-WH

Line Item#: 154  
[Go to Bill of Materials](#)

Type: TL1

Powered by 4submittal.com

**EnVisionLED™**  
WWW.ENVISIONLEDLIGHTING.COM

## Linear Track & Accessories

### 3-Wire Single Circuit

#### TRACK ACCESSORIES

	<b>TS3-SM-LIVE-WH</b> <b>TS3-SM-LIVE-BL</b>	Live End: Required to start a run
	<b>TS3-SM-END-WH</b> <b>TS3-SM-END-BL</b>	End Cap: Required to end a run
	<b>TS3-SM-MJ-WH</b> <b>TS3-SM-MJ-BL</b>	Mini Joiner: Low profile joiner for two straight track sections
	<b>TS3-SM-SC-WH</b> <b>TS3-SM-SC-BL</b>	Straight Connector: Connect two track sections end to end with a center
	<b>TS3-SM-L-WH</b> <b>TS3-SM-L-BL</b>	L-Connector: Connect two track sections at a right angle
	<b>TS3-SM-T-WH</b> <b>TS3-SM-T-BL</b>	T-Connector: Connect two track sections at a T angle
	<b>TS3-SM-X-WH</b> <b>TS3-SM-X-BL</b>	X-Connector: Connect two track sections at an cross angle
	<b>TS3-SM-FLX-WH</b> <b>TS3-SM-FLX-BL</b>	Flexible Connector: Connect two track sections at any angle up to 90°
	<b>TS3-SM-FC-WH</b> <b>TS3-SM-FC-BL</b>	Floating Canopy: Track can be connected to existing outlet box along the track.



Date: 1/12/2026

Project:  
FINDLAY FLATSDescription:  
LED-ATH-10W-5CCT-30D-WHLine Item#: 155  
[Go to Bill of Materials](#)Type: TRACK  
HEAD

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## ARCY-Line: Track Heads

### COB 5-CCT Selectable



#### Track Lights



#### Detail Specifications:

- Finish: White, Black
- Damp Location Rated
- Chip: High Lumen COB, R9 >50, CRI >90
- 2 Step MacAdam Ellipses
- Operating Temperature: -40° - 114° F
- Lens: PMMA Clear Lens
- Average life (L70) of 50,000 hours

#### Applications:

- General Track Lighting
- Residential & Multifamily
- Art Galleries, Museums
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality

#### Product Information:

- Metal housing and trim for better heat dissipation
- 350° Horizontal Rotation, 90° Vertical Rotation
- Interchangeable beam angles
- For use with H-Type track or surface mount installation
- Select-n-Switch Technology: 5-CCT
- Instant-On to full brightness

#### Driver Options:

- Voltage: 120V
- Triac Dimmable Down to 5%
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz
- Built in 2.5Kv Surge Protector
- Flicker Free

#### Mounting & Installation:

- Compatible with H-Type single circuit track system
- Surface mount accessory option available for 3/40 J-Box

#### Certifications:

- ETL Listed for USA and CA
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017
- IC Rated and ASTM-E283 Air-Tight
- Complies with UL 263, ASTM E119, CAN ULC S101


Series	Beam Angles	Finish	Mounting
LED-ATH-10W-5CCT 10W • 1,000lm	30D <sup>1</sup> 30°	WH White	(Blank) H-Type Track
LED-ATH-20W-5CCT 20W • 2,000lm	36D <sup>1</sup> 36°	BLK Black	SM Surface Mount
LED-ATH-30W-5CCT 30W • 3,000lm	24D 24° 60D 60°		
<sup>1</sup> • 30D standard on 10W. • 36D standard on 20W & 30W. • 24D & 60D available for all sizes			

#### Optional Accessories (Order Separately)

Optic Lens	Surface Mount	Emergency Backup <sup>1</sup> (field install)
ATH-10W-24D 24° Beam Angle ATH-10W-60D 60° Beam Angle ATH-20W-24D 24° Beam Angle ATH-20W-60D 60° Beam Angle ATH-30W-24D 24° Beam Angle ATH-30W-60D 60° Beam Angle	ATH-SM Surface Mount for 30/40 Jbox	LED-EMB-15W-HV-0/10V-2P Up to 14W fixtures LED-EMB-25W-HV-0/10V-2P Up to 24W fixtures
		<sup>1</sup> Field installable. Lasts 90 minutes.

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

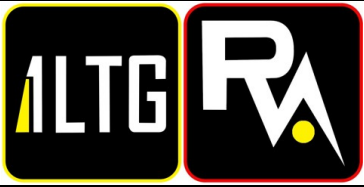

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-ATH-10W-5CCT-30D-WH

Line Item#: 155  
[Go to Bill of Materials](#)

Type: TRACK  
HEAD





Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## ARCY-Line: Track Heads


### COB 5-CCT Selectable

#### FEATURES

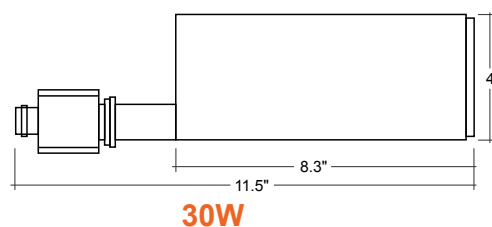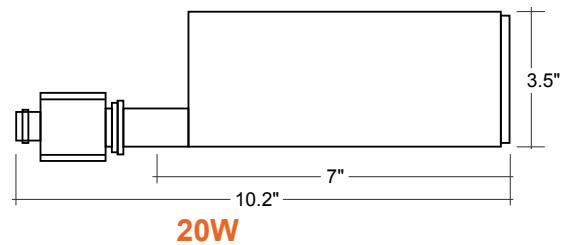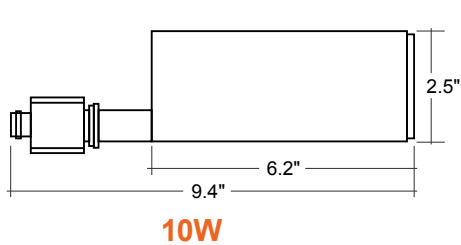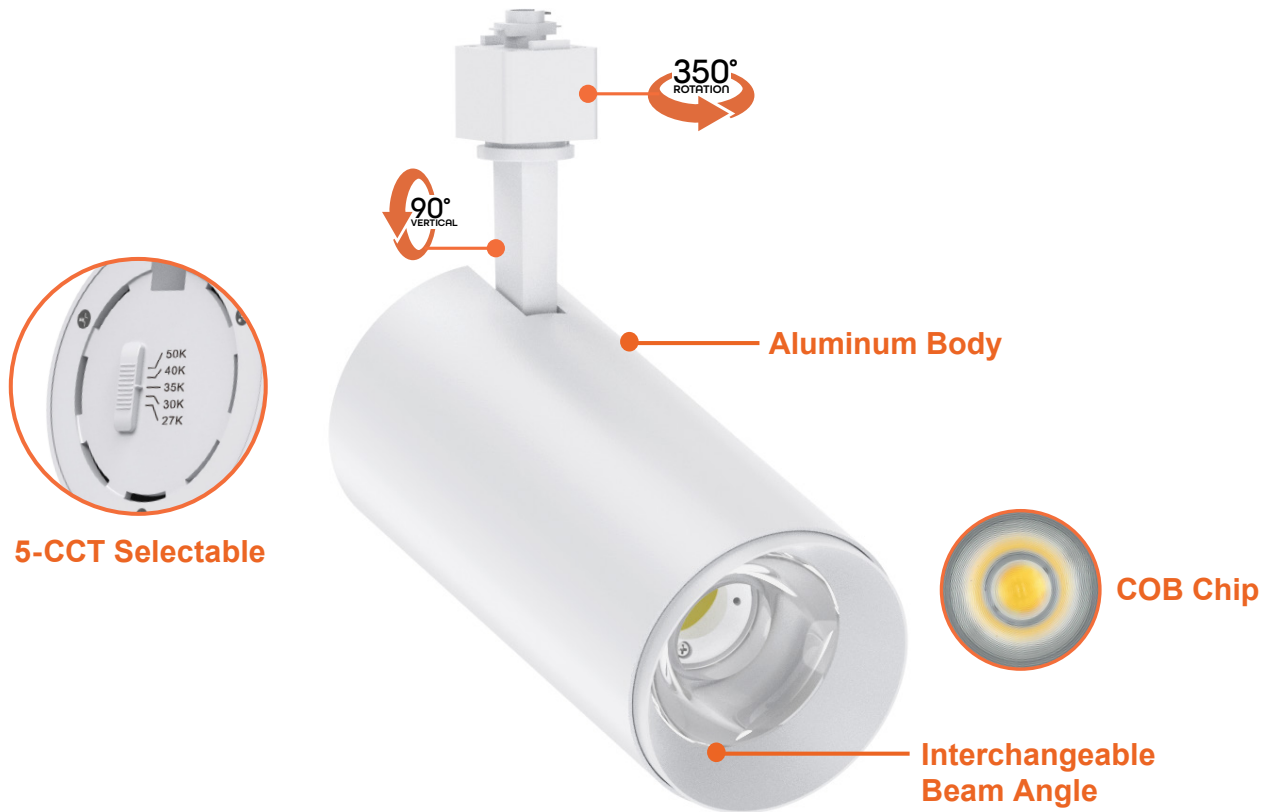

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

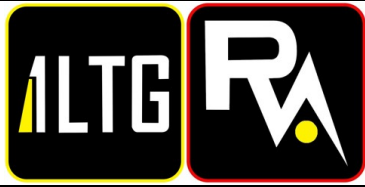

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LED-ATH-10W-5CCT-30D-WH

Line Item#: 155  
[Go to Bill of Materials](#)

Type: TRACK  
HEAD


Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COM

## ARCY-Line: Track Heads

### COB 5-CCT Selectable

#### ACCESSORIES

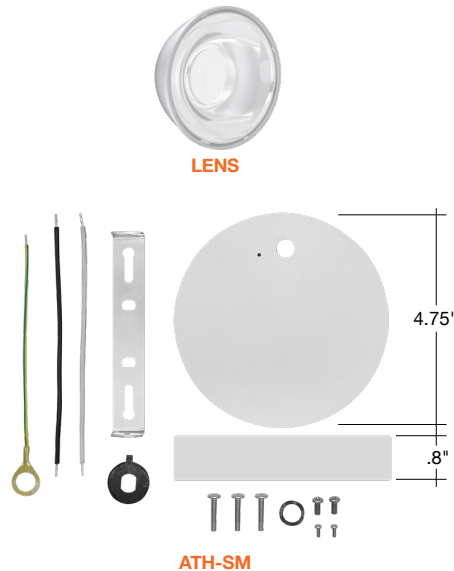

LENS

ATH-SM

#### QUICK SHIP MODELS

Model	Voltage	Watts	Lumens	Color	CRI
LED-ATH-10W-5CCT-30D-WH	120V	10w	1000	27/30/35/40/50K	>90
LED-ATH-10W-5CCT-30D-BLK	120V	10w	1000	27/30/35/40/50K	>90
LED-ATH-20W-5CCT-36D-WH	120V	20w	2000	27/30/35/40/50K	>90
LED-ATH-20W-5CCT-36D-BLK	120V	20w	2000	27/30/35/40/50K	>90
LED-ATH-30W-5CCT-36D-WH	120V	30w	3000	27/30/35/40/50K	>90
LED-ATH-30W-5CCT-36D-BLK	120V	30w	3000	27/30/35/40/50K	>90

#### OPTIC LENS

Model	Description
ATH-10W-24D	Track Heads: ACRY-Line 24D Optic
ATH-10W-60D	Track Heads: ACRY-Line 60D Optic
ATH-20W-24D	Track Heads: ACRY-Line 24D Optic
ATH-20W-60D	Track Heads: ACRY-Line 60D Optic
ATH-30W-24D	Track Heads: ACRY-Line 24D Optic
ATH-30W-60D	Track Heads: ACRY-Line 60D Optic

#### SURFACE MOUNT

Accessory	Description
ATH-SM	Surface Mount for 30/40 Jbox

#### BATTERY BACK-UP

Accessory	Description
LED-EMB-15W-HV-0/10V-2P	Up to 14W fixtures
LED-EMB-25W-HV-0/10V-2P	Up to 24W fixtures

#### TESTED COMPATIBLE DIMMERS

Other dimmers may be compatible but have not been tested.  
Please contact us for more information.

Lutron	Leviton	Toshiba	Panasonic
DVCL-153P	6674	WDG9001	WN575149
SCL-153P			
LGCL-153P			
MACL-153M			
MSCL-OP153M			
S-600P			
AYCL-153			
DV-600P			

**EnVision LED Lighting, Inc.**

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
SM56885FTSN

Line Item#: 157  
[Go to Bill of Materials](#)

Type: SM13

Powered by 4submittal.com


Essentials - 588x | SM56885FTSN

Job Name: Job Type: Quantity: Comments:



#### PRODUCT DESCRIPTION

Maxim Lighting's commitment to both the residential lighting and the home building industries will assure you a product line focused on your lighting needs. With Maxim Lighting you will find quality product that is well designed, well priced and readily available.



#### MEASUREMENTS

DIMENSION : 9" L x 9" W x 5" H  
HANGING WEIGHT : 2.18 lb

#### LAMPING

INPUT VOLTAGE : 120V  
BULB : 60W Incandescent E26 Medium , 120W Total  
BULB INCLUDED : (Not Included)  
DIMMABLE : Yes

#### FINISHES OPTION

Oil Rubbed Bronze (OI)  
 Satin Nickel (SN)

#### GLASS

Frosted FT

#### MATERIAL

Glass, Steel

#### RATINGS

cETLus  
Damp Location



#### ADDITIONAL

OPERATING TEMPERATURE:  
-20°C (-4°F), 40°C (104°F)

Always consult a qualified electrician before installing any lighting product.

# STUDIO•M

Modifications or Customizations: Please email [contract@studiomlighting.com](mailto:contract@studiomlighting.com)

Sample Request: Please email [order@studiomlighting.com](mailto:order@studiomlighting.com) with subject line

"Sample Order, [Project Name] / [Specifier/Designer]"

All samples are subject to Studio M approval and must show proof of project and/or explanation.

Job Name:	Job Type:
Quantity:	Comments:

StudioMlighting.com - 1.626.956.4209



Date: 1/12/2026

Project:  
FINDLAY FLATSDescription:  
LED-A19-9W-5CCTLine Item#: 158  
[Go to Bill of Materials](#)

Type: SM13 LAMP

Powered by 4submittal.com

**EnVisionLED**  
WWW.ENVISIONLEDLIGHTING.COMProject: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_

LED Bulbs

**A Bulb SERIES: 5-CCT LED BULBS**



A-19, A-21



A-19



A-21

**Detail Specifications**

- IP Rating: Damp Location
- Beam Angle: 220°
- 5-CCT: 27/30/35/40/50K
- Chip: SMD 2835, R9 >50, CRI >90
- Operating Temperature: -4° - 114° F
- Average life (L70) of 25,000 hours

**Applications:**

- Decorative Lighting
- Interior Lighting
- Table & Floor Lamps
- Showcases
- Residential, Multi-Family, Commercial

**Product Information:**

- Suitable for use in existing fixtures
- Instant-On to full brightness

**Driver Options:**

- 120V
- Triac Dimmable
- PF >0.9, 50/60Hz

**Mounting & Installation:**

- E26 Socket
- Direct A Lamp Replacement

**Packaging:**

- All bulbs come in individual color boxes, but are sold in inner carton qty packs only

Carton Qty.	A-19	A-21
Inner Carton	10	10
Master Carton	100	100

**Certifications:**

- ETL Listed for USA and CA
- Energy Star
- Title 20 and JA8-2022 Approved
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

**Dimmer List:**

Leviton	6674
Lutron	LGCL-153P
Lutron	DVCL-153P
Lutron	CTCL-153P
Lutron	MAELV-300

**Series****LED-A19-9W-5CCT**

600 Lumens 60W Equivalent

**LED-A21-15W-5CCT**

1,600 Lumens 100W Equivalent

Specs and model numbers are subject to change with or without notice.

**EnVision LED Lighting, Inc.**6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | [www.envisionledlighting.com](http://www.envisionledlighting.com)

Rev. 10.23





Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 159  
[Go to Bill of Materials](#)

Type: SM2

Powered by 4submittal.com




LIGHTING | REINVENTED

plano **ARCH** PRO

## LDLL | Eclipse-II

Product Data Sheet

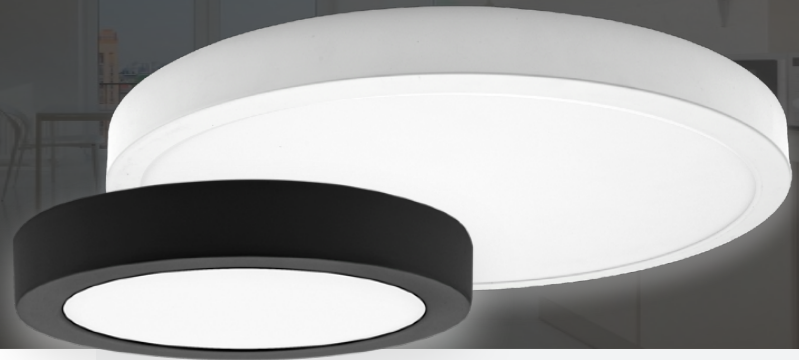

COMMERCIAL-GRADE

### LED Surface Mount Puck Downlight



CCTselect



TruColor Rendering

5" / 7" / 9" / 11" / 13"

#### Product Overview

**INTENDED USE** — The Eclipse-II Series is built for 5-way switchable CCT and is suitable for use in dry, damp, and wet locations, perfect for use in kitchens, hallways, stairways, bathrooms, closets, and just about anywhere you'd need it.

**CONSTRUCTION** — The die-cast aluminum housing is designed for durability and ruggedness.

**INSTALLATION** — Quick-mount aluminum backplate for easy installation.

**WARRANTY** — Featuring a no-compromise 5-year warranty, Energy Star and JA8-compliant, the Eclipse-II is a clean and modern solution for surface mounted driverless design.

ARCHIPELAGO luminaires and LED components undergo rigorous testing by an independent laboratory to meet IESNA LM-79 and LM-80 standards for light output and lumen maintenance. LED color temperature is warranted to shift no more than 180K over the standard warranty period. Correlated Color Temperature (CCT) follows the guidelines set forth in the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

#### Applications



Residential



Hallway



Patio



Entryway

#### Main Features

- Low-Profile Edge-Lit Surface Mount Design
- Durable Di-Cast Aluminum Trim w/ Frosted Lens
- For New Construction or Retrofit Applications
- Suitable for Use in Dry, Damp and Wet Locations
- Suitable for Use in Closets, In Accordance to NEC Guidelines
- Installs on Ceiling and Standard Junction Boxes
- Dimmable to 10% on Compatible TRIAC Dimmers
- 5-Year, 50,000 Hr Warranty
- CEC T24 JA8 Compliant
- NEC Compliant, Suitable for Use in Closet
- Energy Star Certified for 5", 7", 9"

#### Product Warranty\*

5-Year Warranty



50,000 Hrs



\* Standard warranty. Extended warranty available.

Archipelago Lighting, Inc.


| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

[Contact Us](#)





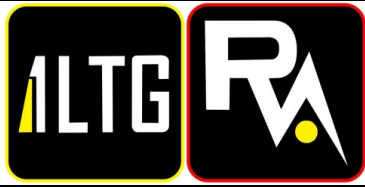

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W


Line Item#: 159  
[Go to Bill of Materials](#)

Type: SM2

Powered by 4submittal.com



LDLL | Eclipse-II

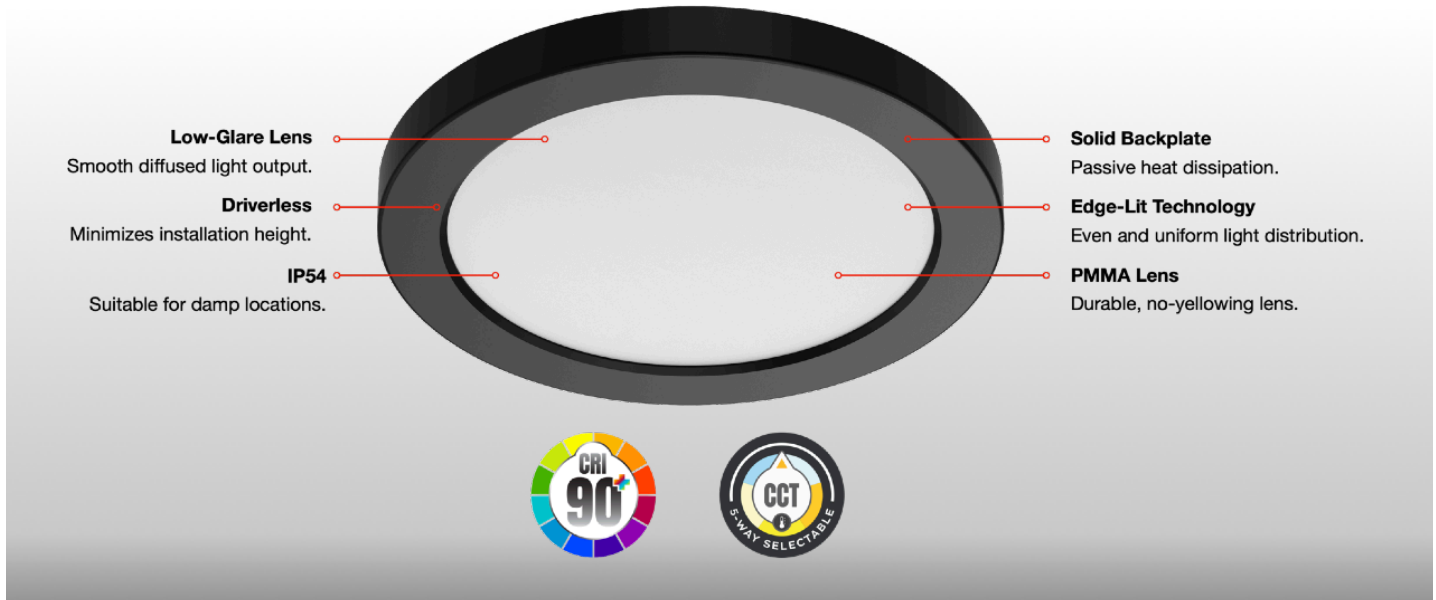

#### Ordering Guide<sup>1</sup>

Model Series	Size (in) / Wattage (W)	Series	CCTselect (K)	Finish Color
<b>LDLL</b> LED Surface Mount Puck Downlight	<b>0510</b> 5inch / 10W <b>0715</b> 7inch / 15W <b>0918</b> 9inch / 18W <b>1121</b> 11inch / 21W <b>1324</b> 13inch / 24W	- <b>E2</b> Eclipse-II	<b>S5</b> 5-CCTselect: 2700K 3000K 3500K 4000K 5000K	/ <b>B</b> Black <b>W</b> White
<b>CATALOG #:</b>				
<b>LDLL</b>		- <b>E2</b>	<b>S5</b>	/

#### Options Guide<sup>2</sup>

EM Driver <sup>3</sup>	Motion Sensor
<input type="checkbox"/> <b>EM15</b> 15W EM Driver <input type="checkbox"/> <b>CRCU</b> 15W EM Driver with Junction Box	<input type="checkbox"/> <b>MSP/W</b> PIR Bi-Level Sensor for 7" and 9" ONLY (White Finish)
<b>OPTIONAL ACCESSORIES #:</b>	

NOTE:

- Only one selection may be applicable within the same category.
- Multiple selections may be applicable within the same option category. See Compatible Accessories below for details.
- EM drivers only work with 7, 9, 11 and 13in fixtures

#### Archipelago Lighting, Inc.


| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

#### Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)






+1 (866) 912-3220

	Date: 1/12/2026	Description: LDLL0510-E2S5/W	Line Item#: 159
	Project: FINDLAY FLATS		<a href="#">Go to Bill of Materials</a>
			Type: SM2
Powered by 4submittal.com			



LDLL | Eclipse-II

Sizing & Measurements


Model Series	Dimensions	Overall Diameter (in)	Depth (IN)
LDLL0510-E2		5.51	0.79
LDLL0715-E2		7.48	0.82
LDLL0918-E2		8.86	0.79
LDLL1121-E2		10.98	0.98
LDLL1124-E2		12.80	0.98

Recommended Dimmers

Make	Models			
Lutron	TG-600PR-WH S-600PR-WH CTCL-153PDH-WH	TGCL-153PH-LA SLV-600P-AL DV-600PR-WH	SCL-153PH-WH GT-600P DVCL-153P	MSCL-OP153M MACL-153M//MA-R PD-6WCL
Leviton	6672 IPL06	6674	DSL06	RNL06

Accessories (Standard)

Accessories (Optional)



<b>Mounting Bracket</b>	<b>Wire Nuts</b>	<b>Bolts</b>	<b>15W EM Driver</b>	<b>PIR Bi-Level Sensor</b>
Compatible to 2.75" or 3.50" Junction Box			EM15-HMB/170DC CRCU-EM/JBM	LDLL-E2/MSP/W

Archipelago Lighting, Inc.


| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220


	Date: 1/12/2026	<b>Description:</b> LDLL0510-E2S5/W	Line Item#: 159
	Project: FINDLAY FLATS		<a href="#">Go to Bill of Materials</a>
			Type: SM2


Powered by 4submittal.com



LDLL | Eclipse-II

EM Driver / J-Box (Optional)

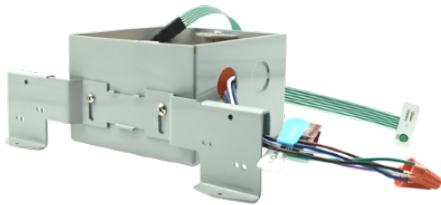


Technical Specification	CRCU-EM/JBM
Emergency Power	15W Max
Installation Method	Recessed
IP Rating	IP20
CEC T.24/JA8 Compliant	Yes
Color Finish	Grey
Physical Features	<ul style="list-style-type: none"> <li>Directly connect to AC input</li> <li>Fits 2.75" and 3.5" J-Box</li> <li>Supports recessed in-ceiling mount</li> </ul>
Self-Diagnostic Test Switch	<ol style="list-style-type: none"> <li>Emergency conversion kit will go into emergency mode when test switch is pressed while main power is ON.</li> <li>Will go into charging mode if test switch is not pressed.</li> <li>In emergency mode, pressing the test switch for 3-seconds will inactivate emergency mode.</li> </ol>
Indicator Status Light	<ol style="list-style-type: none"> <li>Green ON: Charging mode / charging full</li> <li>Green OFF: Mains power OFF / discharging mode</li> </ol>
Dimension	<p>W4.29in x H2.96</p> 

Archipelago Lighting, Inc.

| **Headquarter:** 4615 State Street, Montclair, CA 91763  
 | **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)  
 +1 (866) 912-3220

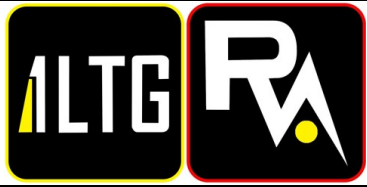

Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 160  
[Go to Bill of Materials](#)

Type: SM1

Powered by 4submittal.com




LIGHTING | REINVENTED

plano **ARCH** PRO

## LDLL | Eclipse-II

Product Data Sheet

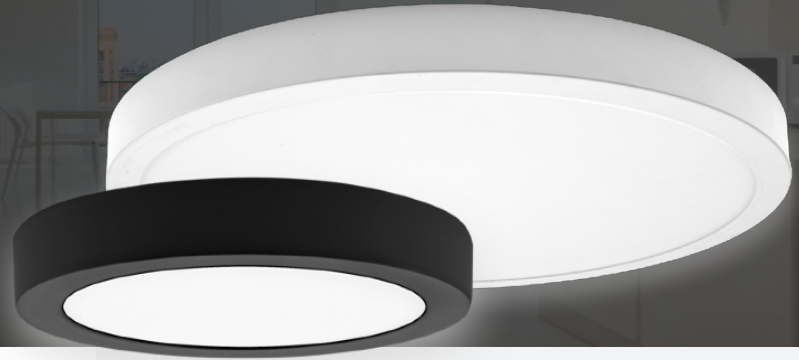

COMMERCIAL-GRADE

### LED Surface Mount Puck Downlight



CCTselect



TruColor Rendering

5" / 7" / 9" / 11" / 13"

#### Product Overview

**INTENDED USE** — The Eclipse-II Series is built for 5-way switchable CCT and is suitable for use in dry, damp, and wet locations, perfect for use in kitchens, hallways, stairways, bathrooms, closets, and just about anywhere you'd need it.

**CONSTRUCTION** — The die-cast aluminum housing is designed for durability and ruggedness.

**INSTALLATION** — Quick-mount aluminum backplate for easy installation.

**WARRANTY** — Featuring a no-compromise 5-year warranty, Energy Star and JA8-compliant, the Eclipse-II is a clean and modern solution for surface mounted driverless design.

ARCHIPELAGO luminaires and LED components undergo rigorous testing by an independent laboratory to meet IESNA LM-79 and LM-80 standards for light output and lumen maintenance. LED color temperature is warranted to shift no more than 180K over the standard warranty period. Correlated Color Temperature (CCT) follows the guidelines set forth in the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

#### Applications



Residential



Hallway



Patio



Entryway

#### Main Features

- Low-Profile Edge-Lit Surface Mount Design
- Durable Di-Cast Aluminum Trim w/ Frosted Lens
- For New Construction or Retrofit Applications
- Suitable for Use in Dry, Damp and Wet Locations
- Suitable for Use in Closets, In Accordance to NEC Guidelines
- Installs on Ceiling and Standard Junction Boxes
- Dimmable to 10% on Compatible TRIAC Dimmers
- 5-Year, 50,000 Hr Warranty
- CEC T24 JA8 Compliant
- NEC Compliant, Suitable for Use in Closet
- Energy Star Certified for 5", 7", 9"

#### Product Warranty\*

5-Year Warranty



50,000 Hrs



\* Standard warranty. Extended warranty available.

Archipelago Lighting, Inc.

| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

[Contact Us](#)



LDLL | Eclipse-II



Project Details





Project Name:

Fixture Schedule:

Project Number:

Notes:

Highlights

Features		Description
5-CCTselect		CCT selectable: 5-way dip-switch
Sensor Ready		Optional plug-n-play motion sensor available on 7" and 9"
TruColor High CRI		Title 24 Compliant. JA8 LED 90CRI+
Limited Warranty		5-Year Warranty

Key Specifications

- Input Voltage: 120V
- Dimming: TRIAC
- Efficacy: ≤103lm/W
- IP: Suitable for Wet Location
- Housing: Die-Cast Aluminum
- Power Factor (PF): >0.9 Non-Flicker
- Operating Temperature: -4°F - 113°F
- Total Harmonic Distortion (THD): <20%
- Beam Angle (°): 120°

Certifications



Model Specifications

Model	Size (in)	Wattage (W)	Lumen (lm)	Efficacy (lm/W)	5-CCTselect (K) <sup>1</sup>	Voltage (V)	CRI
LDLL0510	5"	10W	671lm 675lm 698lm 712lm 689lm	67lm/W 68lm/W 70lm/W 71lm/W 69lm/W	2700K 3000K 3500K 4000K 5000K	120V	90CRI+
LDLL0715	7"	15W	1,187lm 1,205lm 1,211lm 1,257lm 1,241lm	79lm/W 80lm/W 81lm/W 84lm/W 83lm/W	2700K 3000K 3500K 4000K 5000K		
LDLL0918	9"	18W	1,409lm 1,415lm 1,436lm 1,460lm 1,442lm	78lm/W 79lm/W 80lm/W 81lm/W 80lm/W	2700K 3000K 3500K 4000K 5000K		
LDLL1121	11"	21W	2,022lm 2,035lm 2,054lm 2,165lm 2,159lm	96lm/W 97lm/W 98lm/W 103lm/W 103lm/W	2700K 3000K 3500K 4000K 5000K		
LDLL1324	13"	24W	2,393lm 2,407lm 2,450lm 2,455lm 2,446lm	100lm/W 100lm/W 102lm/W 102lm/W 102lm/W	2700K 3000K 3500K 4000K 5000K		

1. Default settings on CCTselect is highest CCT available.

Archipelago Lighting, Inc.

| **Headquarter:** 4615 State Street, Montclair, CA 91763  
| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)  
+1 (866) 912-3220



Date: 1/12/2026

Project:  
FINDLAY FLATS

Description:  
LDLL0510-E2S5/W

Line Item#: 160  
[Go to Bill of Materials](#)

Type: SM1

Powered by 4submittal.com



LDLL | Eclipse-II

**Low-Glare Lens**  
Smooth diffused light output.

**Driverless**  
Minimizes installation height.

**IP54**  
Suitable for damp locations.

**Solid Backplate**  
Passive heat dissipation.

**Edge-Lit Technology**  
Even and uniform light distribution.

**PMMA Lens**  
Durable, no-yellowing lens.



#### Ordering Guide<sup>1</sup>

Model Series	Size (in) / Wattage (W)	Series	CCTselect (K)	Finish Color
<b>LDLL</b> LED Surface Mount Puck Downlight	<b>0510</b> 5inch / 10W <b>0715</b> 7inch / 15W <b>0918</b> 9inch / 18W <b>1121</b> 11inch / 21W <b>1324</b> 13inch / 24W	- <b>E2</b> Eclipse-II	<b>S5</b> 5-CCTselect: 2700K 3000K 3500K 4000K 5000K	/ <b>B</b> Black <b>W</b> White
<b>CATALOG #:</b>				
<b>LDLL</b>		- <b>E2</b>	<b>S5</b>	/

#### Options Guide<sup>2</sup>

EM Driver <sup>3</sup>	Motion Sensor
<input type="checkbox"/> <b>EM15</b> 15W EM Driver <input type="checkbox"/> <b>CRCU</b> 15W EM Driver with Junction Box	<input type="checkbox"/> <b>MSP/W</b> PIR Bi-Level Sensor for 7" and 9" ONLY (White Finish)
<b>OPTIONAL ACCESSORIES #:</b>	

**NOTE:**

1. Only one selection may be applicable within the same category.
2. Multiple selections may be applicable within the same option category. See Compatible Accessories below for details.
3. EM drivers only work with 7, 9, 11 and 13in fixtures

#### Archipelago Lighting, Inc.

| **Headquarter:** 4615 State Street, Montclair, CA 91763


| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

#### Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)

+1 (866) 912-3220








	Date: 1/12/2026	Description: LDLL0510-E2S5/W	Line Item#: 160
	Project: FINDLAY FLATS		<a href="#">Go to Bill of Materials</a>
			Type: SM1
Powered by 4submittal.com			



LDLL | Eclipse-II

Sizing & Measurements


Model Series	Dimensions	Overall Diameter (in)	Depth (IN)
LDLL0510-E2		5.51	0.79
LDLL0715-E2		7.48	0.82
LDLL0918-E2		8.86	0.79
LDLL1121-E2		10.98	0.98
LDLL1124-E2		12.80	0.98

Recommended Dimmers

Make	Models			
Lutron	TG-600PR-WH S-600PR-WH CTCL-153PDH-WH	TGCL-153PH-LA SLV-600P-AL DV-600PR-WH	SCL-153PH-WH GT-600P DVCL-153P	MSCL-OP153M MACL-153M//MA-R PD-6WCL
Leviton	6672 IPL06	6674	DSL06	RNL06

Accessories (Standard)

Accessories (Optional)



<b>Mounting Bracket</b>	<b>Wire Nuts</b>	<b>Bolts</b>	<b>15W EM Driver</b>	<b>PIR Bi-Level Sensor</b>
Compatible to 2.75" or 3.50" Junction Box			EM15-HMB/170DC CRCU-EM/JBM	LDLL-E2/MSP/W

Archipelago Lighting, Inc.


| Headquarter: 4615 State Street, Montclair, CA 91763

| USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)


+1 (866) 912-3220


	Date: 1/12/2026	Description: LDLL0510-E2S5/W	Line Item#: 160
	Project: FINDLAY FLATS		<a href="#">Go to Bill of Materials</a>
			Type: SM1
Powered by 4submittal.com			



LDLL | Eclipse-II

EM Driver / J-Box (Optional)

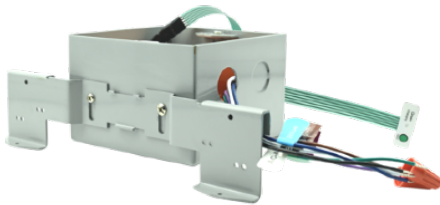

Technical Specification	CRCU-EM/JBM
Emergency Power	15W Max
Installation Method	Recessed
IP Rating	IP20
CEC T.24/JA8 Compliant	Yes
Color Finish	Grey
Physical Features	<ul style="list-style-type: none"> <li>Directly connect to AC input</li> <li>Fits 2.75" and 3.5" J-Box</li> <li>Supports recessed in-ceiling mount</li> </ul>
Self-Diagnostic Test Switch	<ol style="list-style-type: none"> <li>Emergency conversion kit will go into emergency mode when test switch is pressed while main power is ON.</li> <li>Will go into charging mode if test switch is not pressed.</li> <li>In emergency mode, pressing the test switch for 3-seconds will inactivate emergency mode.</li> </ol>
Indicator Status Light	<ol style="list-style-type: none"> <li>Green ON: Charging mode / charging full</li> <li>Green OFF: Mains power OFF / discharging mode</li> </ol>
Dimension	<p>W4.29in x H2.96</p> 

Archipelago Lighting, Inc.

| Headquarter: 4615 State Street, Montclair, CA 91763  
 | USA Production: 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

[www.archipelagolighting.com](http://www.archipelagolighting.com)  
 +1 (866) 912-3220